

Code: UT-803

## LABORATORY METER **UT-803** UNI-T

Net: **189.30 EUR** Gross: **189.30 EUR**

The UT-803 is a digital laboratory meter used to measure: voltage, current, resistance, capacity, frequency, temperature and to check the correct operation of diodes.



### SPECIFICATION

DC voltage measurement:	<ul style="list-style-type: none"><li>• 600 mV <math>\pm</math> (0.6% + 2) @ 0.1 mV,</li><li>• 6 V <math>\pm</math> (0.3% + 2) @ 0.001 V,</li><li>• 60 V <math>\pm</math> (0.3% + 2) @ 0.01 V,</li><li>• 600 V <math>\pm</math> (0.3% + 2) @ 0.1 V,</li><li>• 1000 V <math>\pm</math> (0.5% + 3) @ 1 V</li></ul>
AC voltage measurement:	<ul style="list-style-type: none"><li>• 600 mV @ 0.1 mV : <math>\pm</math> (0.6% + 5) @ 40 Hz ... 50 kHz <math>\pm</math> (1.0% + 5) @ 50 kHz ... 100 kHz</li><li>• 6 V @ 0.001 V : <math>\pm</math> (0.6% + 5) @ 40 Hz ... 1 kHz <math>\pm</math> (1.0% + 5) @ 1 kHz ... 10 kHz <math>\pm</math> (3.0% + 5) @ 10 kHz ... 100 kHz</li><li>• 60 V @ 0.01 V : <math>\pm</math> (0.6% + 5) @ 40 Hz ... 1 kHz <math>\pm</math> (1.5% + 5) @ 1 kHz ... 10 kHz <math>\pm</math> (3.0% + 5) @ 10 kHz ... 20 kHz <math>\pm</math> (8.0% + 5) @ 20 kHz ... 100 kHz</li><li>• 600 V @ 0.1 V : <math>\pm</math> (0.6% + 5) @ 40 Hz ... 1 kHz <math>\pm</math> (3.5% + 5) @ 1 kHz ... 10 kHz</li><li>• 1000 V @ 1 V : <math>\pm</math> (1.2% + 3) @ 40 Hz ... 1 kHz <math>\pm</math> (3.0% + 3) @ 1 kHz ... 3 kHz</li></ul>
DC current measurement:	<ul style="list-style-type: none"><li>• 600 <math>\mu</math>A <math>\pm</math> (0.5% + 3) @ 0.1 <math>\mu</math>A,</li><li>• 6000 <math>\mu</math>A <math>\pm</math> (0.5% + 3) @ 1 <math>\mu</math>A,</li><li>• 60 mA <math>\pm</math> (0.5% + 3) @ 0.01 mA,</li><li>• 600 mA <math>\pm</math> (0.8% + 3) @ 0.1 mA,</li><li>• 10 A <math>\pm</math> (1.2% + 3) @ 0.01 A</li></ul>



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

AC current measurement:	<ul style="list-style-type: none"> <li>• 600 <math>\mu</math>A @ 0.1 <math>\mu</math>A :  <math>\pm</math> (1.0% + 5) @ 40 Hz ... 10 kHz  <math>\pm</math> (2.0% + 5) @ 10 kHz ... 15 kHz</li> <li>• 6000 <math>\mu</math>A @ 1 <math>\mu</math>A :  <math>\pm</math> (1.0% + 5) @ 40 Hz ... 10 kHz  <math>\pm</math> (2.0% + 5) @ 10 kHz ... 15 kHz</li> <li>• 60 mA @ 0.01 mA :  <math>\pm</math> (1.0% + 5) @ 40 Hz ... 10 kHz  <math>\pm</math> (2.0% + 5) @ 10 kHz ... 15 kHz</li> <li>• 600 mA @ 0.1 mA :  <math>\pm</math> (1.0% + 5) @ 40 Hz ... 10 kHz  <math>\pm</math> (3.0% + 5) @ 1 kHz ... 10 kHz</li> <li>• 10 A @ 0.01 A :  <math>\pm</math> (2.0% + 6) @ 40 Hz ... 5 kHz</li> </ul>
Resistance measurement:	<ul style="list-style-type: none"> <li>• 600 <math>\Omega</math> <math>\pm</math> (0.8% + 3) + test leads resistance @ 0.1 <math>\Omega</math>,</li> <li>• 6 k<math>\Omega</math> <math>\pm</math> (0.5% + 2) @ 0.001 k<math>\Omega</math>,</li> <li>• 60 k<math>\Omega</math> <math>\pm</math> (0.5% + 2) @ 0.01 k<math>\Omega</math>,</li> <li>• 600 k<math>\Omega</math> <math>\pm</math> (0.5% + 2) @ 0.1 k<math>\Omega</math>,</li> <li>• 6 M<math>\Omega</math> <math>\pm</math> (0.8% + 2) @ 0.001 M<math>\Omega</math>,</li> <li>• 60 M<math>\Omega</math> <math>\pm</math> (1.2% + 3) @ 0.01 M<math>\Omega</math></li> </ul>
Capacitance measurement:	<ul style="list-style-type: none"> <li>• 6 nF <math>\pm</math> (2.5% + 5) @ 0.001 nF,</li> <li>• 60 nF <math>\pm</math> (2.5% + 5) @ 0.01 nF,</li> <li>• 600 nF <math>\pm</math> (2.0% + 5) @ 0.1 nF,</li> <li>• 6 <math>\mu</math>F <math>\pm</math> (2.0% + 5) @ 0.001 <math>\mu</math>F,</li> <li>• 60 <math>\mu</math>F <math>\pm</math> (2.0% + 5) @ 0.01 <math>\mu</math>F,</li> <li>• 600 <math>\mu</math>F <math>\pm</math> (3.0% + 4) @ 0.1 <math>\mu</math>F,</li> <li>• 6 mF <math>\pm</math> (5.0% + 4) @ 0.001 mF</li> </ul>
Inductance measurement:	—
Frequency measurement:	<ul style="list-style-type: none"> <li>• 6 kHz <math>\pm</math> (0.1% + 3) @ 0.001 kHz,</li> <li>• 60 kHz <math>\pm</math> (0.1% + 3) @ 0.01 kHz,</li> <li>• 600 kHz <math>\pm</math> (0.1% + 3) @ 0.1 kHz,</li> <li>• 6 MHz <math>\pm</math> (0.1% + 3) @ 0.001 MHz,</li> <li>• 60 MHz <math>\pm</math> (0.1% + 3) @ 0.01 MHz,</li> </ul>
Temperature measurement:	<ul style="list-style-type: none"> <li>• <math>^{\circ}</math>C :</li> <li>-40 <math>^{\circ}</math>C ... 0 <math>^{\circ}</math>C <math>\pm</math> (8.0% + 5) @ 1 <math>^{\circ}</math>C ,</li> <li>0 <math>^{\circ}</math>C ... 400 <math>^{\circ}</math>C <math>\pm</math> (1.0% + 3) @ 1 <math>^{\circ}</math>C ,</li> <li>400 <math>^{\circ}</math>C ... 1000 <math>^{\circ}</math>C <math>\pm</math> (1.5% + 3) @ 1 <math>^{\circ}</math>C ,</li> <li>• <math>^{\circ}</math>F :</li> <li>-40 <math>^{\circ}</math>F ... 32 <math>^{\circ}</math>F <math>\pm</math> (8.0% + 5) @ 1 <math>^{\circ}</math>F ,</li> <li>32 <math>^{\circ}</math>F ... 752 <math>^{\circ}</math>F <math>\pm</math> (1.5% + 5) @ 1 <math>^{\circ}</math>F ,</li> <li>752 <math>^{\circ}</math>F ... 1832 <math>^{\circ}</math>F <math>\pm</math> (2.5% + 5) @ 1 <math>^{\circ}</math>C</li> </ul>
Automatic change of measuring ranges:	—
hFE:	✓
Diode test:	✓
Sound signal of the continuity test:	✓
Checking TTL logic states:	—
RS-232:	—
USB:	—
Main features:	<ul style="list-style-type: none"> <li>• Large, readable LCD display with backlight</li> <li>• Possibility to measure alternating voltage taking into account the constant component (measurement function AC+DC)</li> <li>• Hold - stopping the meter reading</li> <li>• Aesthetic and solid construction</li> </ul>
Power supply:	<ul style="list-style-type: none"> <li>• 6 x 1.5V, type R14/LR14 battery (not included),</li> <li>• 220 V AC</li> </ul>
Weight:	1.88 kg



Dimensions:	306 x 243 x 107 mm
Manufacturer / Brand:	UNI-T
Guarantee:	2 years

## PRESENTATION

Front panel:




Rear view:





Place for batteries 6 x 1.5V R14/LR14:

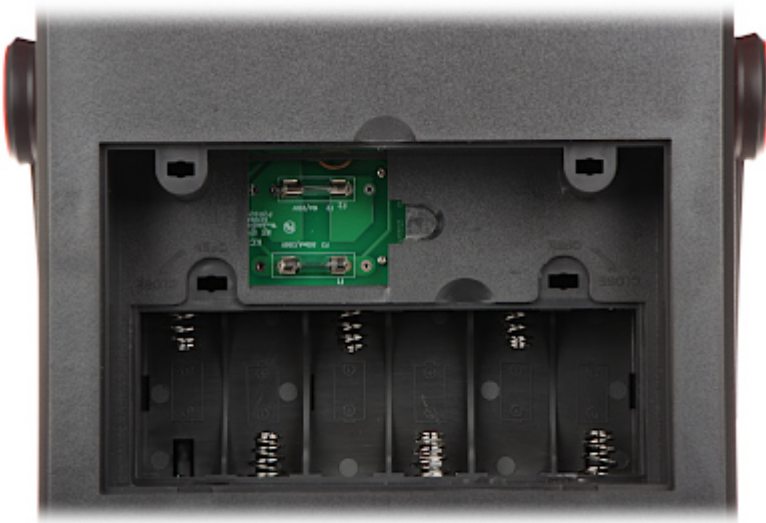

Included, among others measuring adapter:



In the kit:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

