

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order.

If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

The PCM-1220 allows to measure the TV signals at DVB-T/T2, DVB-S/S2, DVB-C/C2 installations. Readable menu will help the operation for any installer.



Output and input:	1 pcs F socket, 1 pcs IEC socket, 1 pcs mini USB
Display:	400 x 360 px TFT LCD
Frequency range:	• 42 MHz ... 862 MHz - DVB-T / DVB-T2 / DVB-C / DVB-C2, • 950 MHz ... 2150 MHz - DVB-S / DVB-S2
Signal level:	• 35 ... 90 dBμV - DVB-S / DVB-S2, • 30 ... 100 dBμV - DVB-T / DVB-T2 / DVB-C / DVB-C2
LNB power supply:	13 / 18 V, max. 500 mA
Antenna powering:	5 / 12 / 18 / 24 V
Switching between bandwidths:	0 / 22 kHz
DiSEqC:	DiSEqC 1.0, 1.2, USALS, SCD, SCD2 systems support
Modulation:	• QPSK, 8PSK, 16APSK, 32APSK - DVB-S / DVB-S2 • QPSK, 16-QAM, 64-QAM, 256-QAM - DVB-T / DVB-T2 • 16-QAM, 32-QAM, 64-QAM, 128-QAM, 256-QAM, 1024-QAM, 4096-QAM - DVB-C / DVB-C2
Video signal test:	—
Programming and firmware upgrade:	via mini USB port
Battery power supply:	• Li-Ion battery 7.4 V / 1400 mAh • 12 V / 1 A (power adapter included)

Main features:	• DVB-S/S2 : Power measurement, Measurement of CNR, CBER, VBER (DVBS), LBER (DVBS2), Real-time spectrum analyzer, Possibility of displaying signal parameters for 4 transponders on one screen - Easy identification for Quattro LNB, Satellite identification function, Satellite location function, Calculation of the azimuth and elevation angles, DisEqC automatic identification, • DVB-T/T2 : Power measurement, Measurement of SNR, MER, CBER, VBER, Freq OFS, Signal parameters (strength and quality) for 4 channels can be displayed on one screen, Spectrum analysis, Automatic channel scan • DVB-C/C2 : Power measurement, Measurement of CBER, VBER, SNR, Freq OFS, Spectrum analysis, Automatic channel scan • Analog signal measurement possible • Speaker built-in • High measurement accuracy • The set includes a practical case • Estimated battery operation time ~ 3 h
Weight:	0.24 kg
Dimensions:	178 x 81 x 35 mm
Supported languages:	Polish, English
Manufacturer / Brand:	Digitsat
Guarantee:	2 years

Front panel:



Bottom view:



Top view:



Rear view:



Device is secured by handy case:



OSD menu:



User Manual

Code: PCM-1220

UNIVERSAL METER **PCM-1220** DVB-T/T2 DVB-S/S2 DVB-C/C2






User Manual

Code: PCM-1220

UNIVERSAL METER **PCM-1220** DVB-T/T2 DVB-S/S2 DVB-C/C2


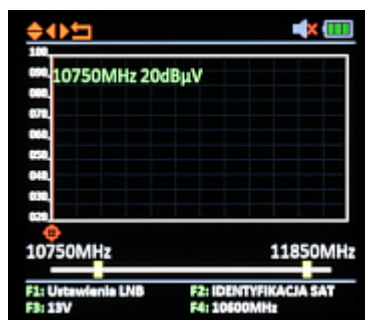




User Manual

Code: PCM-1220

UNIVERSAL METER **PCM-1220** DVB-T/T2 DVB-S/S2 DVB-C/C2

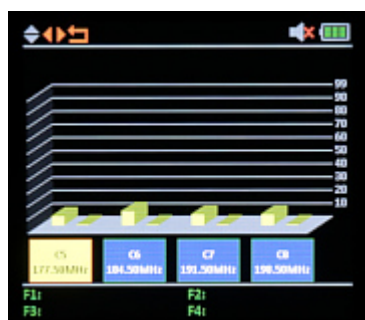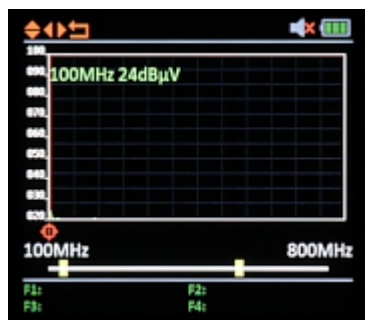




User Manual

Code: PCM-1220

UNIVERSAL METER **PCM-1220** DVB-T/T2 DVB-S/S2 DVB-C/C2

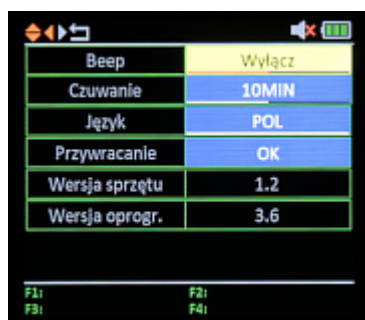

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------