

Code: HDMI-EX-150IR/RX

EXTENDER RECEIVER **HDMI-EX-150IR/RX**

Net: **431.37 NOK** Gross: **431.37 NOK**

Device allows to send High Definition signal to the TV-Set receiver equipped with HDMI connector via UTP Cat. 5, 5e, 6, 7 cable.



SPECIFICATION

Device type:	Receiver
Protocols:	HDBiT
Supported HDMI resolutions:	1080p, 1080i, 720p, 576p, 576i, 480p, 480i
Maximal transmission range:	<ul style="list-style-type: none">• 150 m @ 1080p - UTP cat. 7, 120 m @ 1080p - UTP cat. 6, 100 m @ 1080p - UTP cat. 5e (manufacturer data)• 120 m @ 1080p - UTP cat. 5e (our tests result)• 15 m @ HDMI cable
Max. number of receivers working in the same time:	253
Supported audio formats:	DTS-HD, Dolby true HD, LPCM7.1, AC3, DTS, DSD
Power supply:	5 V DC / 1 A - (power adapter included)
Main features:	IR carrier frequency : 20 ... 60 kHz
Weight:	0.142 kg
Dimensions:	97 x 94 x 24 mm
Guarantee:	2 years

PRESENTATION

Connectors:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Examples of connection diagrams:




- 1) Device with HDMI output
- 2) HDMI cable
- 3) HDMI-EX-150IR/TX
- 4) UTP Cat.5e/6
- 5) HDMI-EX-150IR/RX
- 6) Monitor with HDMI input

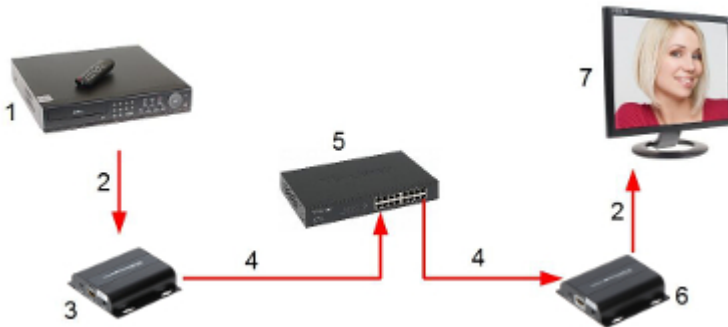

- 1) Device with HDMI output
- 2) HDMI cable
- 3) HDMI-EX-150IR/TX
- 4) UTP Cat.5e/6
- 5) Hub / Switch
- 6) HDMI-EX-150IR/RX
- 7) Monitor with HDMI input



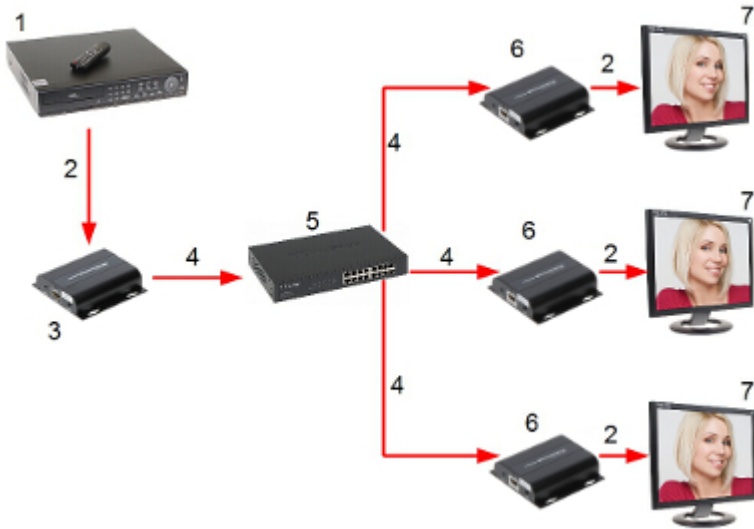

- 1) Device with HDMI output
 - 2) HDMI cable
 - 3) HDMI-EX-150IR/TX
 - 4) UTP Cat.5e/6
 - 5) Hub / Switch
 - 6) HDMI-EX-150IR/RX
 - 7) Monitor with HDMI input
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------