

Code: GEMINI-AH0B-3

AHD, PAL CAMERA **GEMINI-AH0B-3** - 1080p

Net: **58.02 EUR** Gross: **58.02 EUR**

Megapixel camera with 1/2.8" Sony CMOS IMX222 sensor and AHD (Analog High Definition) / PAL.

The AHD interface allows to transmission of analog video signal via coaxial cable in 1080p resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

The selection of the AHD / PAL standard is made with using Left / Right buttons.



SPECIFICATION

Standard:	AHD, PAL
Sensor:	1/2.8 " Sony CMOS IMX222
Digital Image Processor:	Nextchip NVP2441H
Resolution:	1920 x 1080 - 1080p AHD-H , 960 x 576 - 960H PAL
Lens:	—
Lens mount:	C/CS
Auto Iris socket:	✓
Min. illumination:	0.1 Lux @ F1.2 (color) 0.01 Lux @ F1.2 (black-white)
Video output:	1 Vpp 75 Ω, AHD / PAL - selectable by switch
S/N ratio:	> 50 dB (AGC off)
OSD menu:	✓
Main features:	• ICR - Movable InfraRed filter • Day/Night mode (color/b&w/auto) • WB - White Balance (ATW/AWB/manual/indoor/outdoor) • Sense-UP - (Slow Shutter) - Increase the sensor sensitivity max. x 30 • D-WDR - Wide Dynamic Range • 2D-DNR / 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • Motion Detection - max. 4 zones • Privacy zones - max. 4 • BLC - configurable Back Light Compensation • HSBLC - High Light Compensation (spot) • Mirror - Mirror image • image "freeze" • Sharpness - sharper image outlines • Monitor type correction - LCD/CRT
Power supply:	12 V DC / 200 mA

Application:	The camera is designed for indoor use, due to the possibility of steam condensation.
"Index of Protection":	IP40
Housing:	BOX, Metal
Color:	White / Black
Operation temp:	-10 °C ... 55 °C
Weight:	0.420 kg
Dimensions:	149 x 81 x 71 mm
Guarantee:	2 years

PRESENTATION

Front view:



Side view (Auto Iris DC socket visible):




Rear view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Configuration:

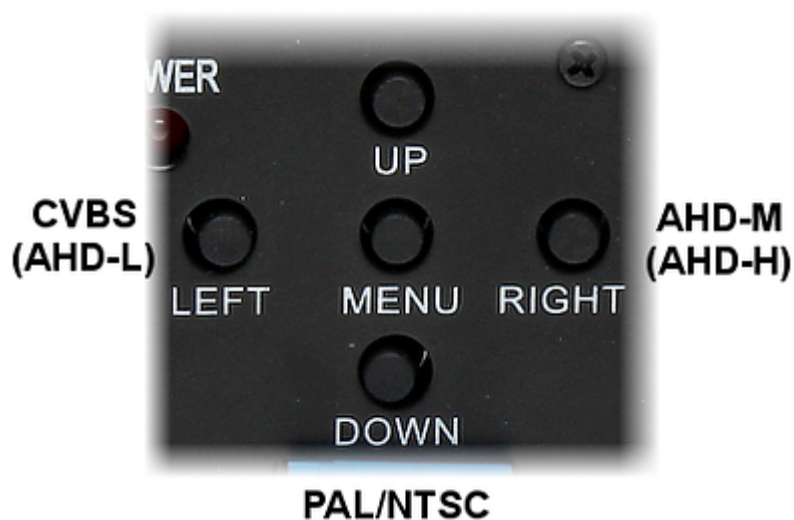


- 1) Turn on the power
 - 2) Press the LEFT / RIGHT button to set an appropriate resolution
 - 3) Press the DOWN button for 5 s, to set PAL/NTSC
- The PAL and NTSC standard is set regardless of the resolution.

OUR TESTS

Camera image at artificial illumination (about 30Lux):

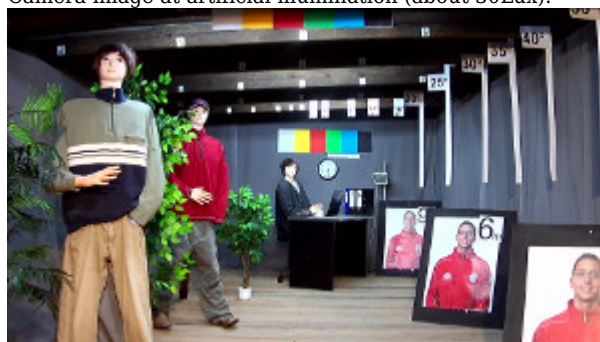

Camera image at direct strong light opposite to camera:

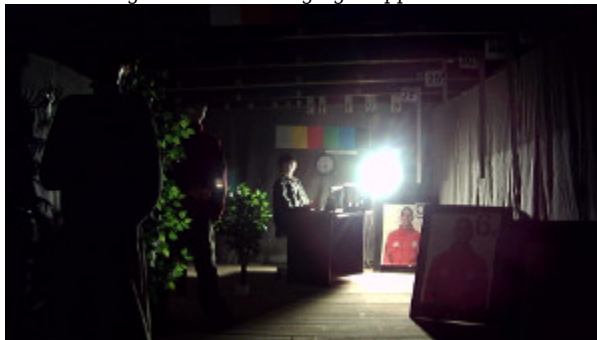

Camera image at night conditions with external IR illuminator on:



Camera image at night conditions, at different illumination values show below:

1 LUX:



0.1 LUX:



0.01 LUX:



0.001 LUX:



Record from camera during daylight operation:

:

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------