

Code: ASI1212A(V2)

ACCESS CONTROLLER **ASI1212A(V2)** DAHUA

Net: **329.91 EUR** Gross: **329.91 EUR**

The ASI1212A(V2) controller can operate autonomously or in the network mode. The device enables single door or read in/out access control. In case of read in/out access control the controller must be connected to the external access reader of the ASR series or to the reader equipped with the Wiegand interface.
To add a device in Smart PSS please enter the data: User: admin, Password: 123456.



SPECIFICATION

Cards support:	13.56 MHz S50
Reading distance of prox-keys:	max. 8 cm
Keyboard built-in:	Touch control keys
Autonomous operation:	✓
Battery backup support:	—
Input lines:	3
Output lines:	4
Identification time:	< 1.5 s
FAR (False Acceptance Rate):	< 0.00004 %
FRR (False Rejection Rate):	< 0.15 %
Communication:	• RS-485 • Wiegand • LAN
Network interface:	10/100 Base-T
Default admin user / password:	- / 88888888
Power supply:	10 ... 15 V DC

Main features:	• 13.56 MHz S50 proximity reader built-in, • Fingerprint reader built-in • Memory of 3000 fingerprint patterns • Possible connection of the external ASR series reader (read in/out door control) • Identification modes : PIN, Proximity identifier 13.56 MHz S50, Fingerprint, Any combination of the above • Tamper detection - removing from mounting surface • Support for door contact and exit button • Indication of forced entry and the lack of closing doors • 30000 indexed users • 6 access groups • 128 General Purpose Schedules • 128 time periods within single Schedule • Holiday Schedules • Anti-passback • History of 150000 events • Integration with an alarm system via in/out line • Remote programming from PC • Watchdog built-in
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Weight:	0.39 kg
Dimensions:	193 x 161 x 33 mm
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION




Front panel:




Bottom view:



Mounting side view:

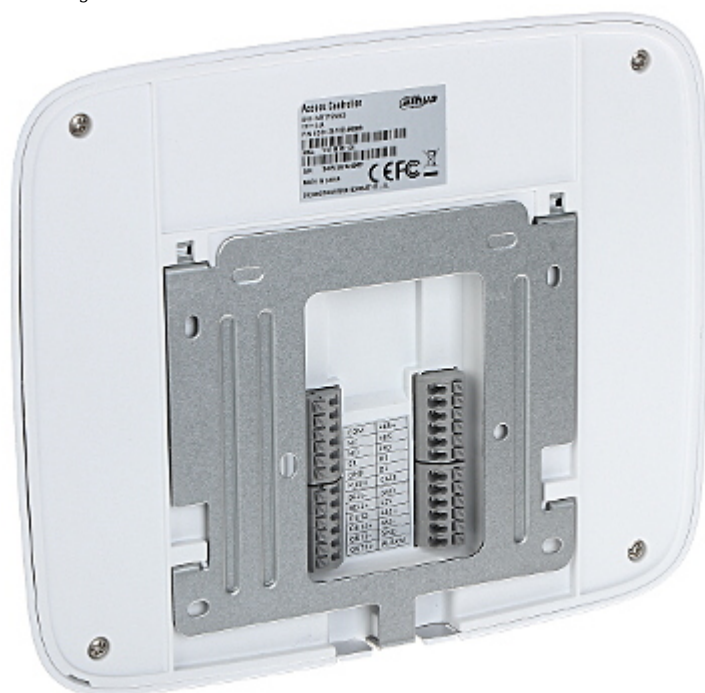


Connectors:

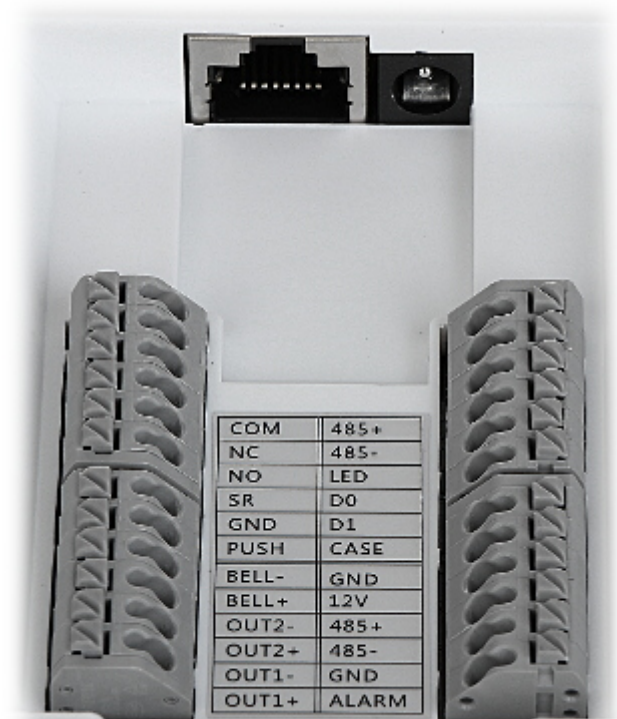

In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

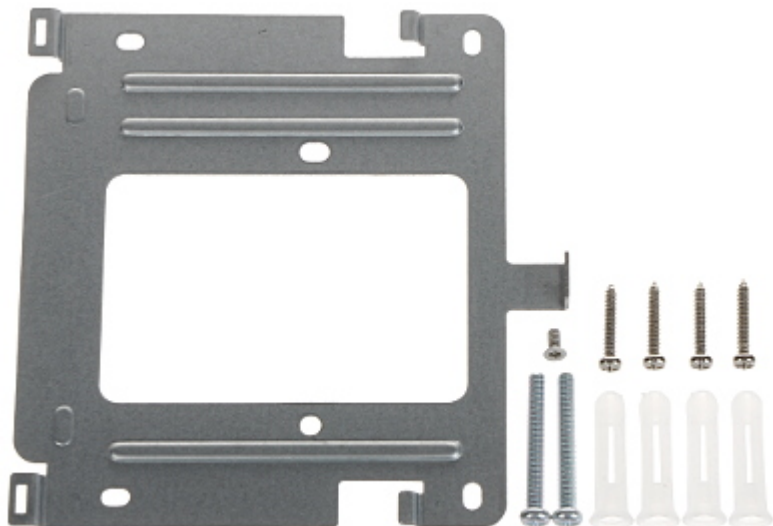

OUR OPINIONS



- After a power failure, the time zone is set to +8h by default.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60