

Code: AHD-14D2-2812

AHD, PAL CAMERA **AHD-14D2-2812** - 720p 2.8 ... 12 mm

Net: **44.36 EUR** Gross: **44.36 EUR**

Megapixel camera with 1/3" Sony CMOS sensor and AHD (Analog High Definition) / PAL.

The AHD interface allows to transmission of analog video signal via coaxial cable in 720p resolution. It enables the transmission of HD resolution images for even 500 m distance with keeping the low costs of the installation. During transmission there are no delays and is maintained the original, high quality image.

Additionally camera has a possibility to select output signal standard between AHD and PAL. The change of the AHD / PAL standard is done with joystick by holding it tilted to the right or to the left for approx. 5 seconds, without going into the OSD.



SPECIFICATION

Standard:	AHD / PAL
Sensor:	1/3 " Sony CMOS IMX238
Digital Image Processor:	Nextchip NVP2430H
Matrix size:	1.4 Mpx
Resolution:	1280 x 720 - 720p AHD-M , 960 x 576 - 960H PAL
Range of IR illumination:	20 m
IR illuminator power adjustment:	Automatic
Lens:	2.8 ... 12 mm
View angle:	• 81 ° ... 23 ° (manufacturer data) • 86 ° ... 30 ° (our tests result)
S/N ratio:	> 50 dB
Video output:	1 Vpp 75 Ω, AHD / PAL - selectable by switch
Main features:	• ICR - Movable InfraRed filter • Sense-UP - (Slow Shutter) - Increase the sensor sensitivity max. x 30 • D-WDR - Wide Dynamic Range • DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • Motion Detection - max. 4 zones • Privacy zones - max. 4 • BLC - configurable Back Light Compensation • HSBLC - High Light Compensation (spot) • Mirror - Mirror image • image "freeze" • Sharpness - sharper image outlines • Monitor type correction - LCD/CRT
OSD menu:	✓
Vandal-proof:	—
"Index of Protection":	IP44
Application:	The camera is designed for indoor use, due to the possibility of steam condensation.

Power supply:	12 V DC / 480 mA
Housing:	Dome - Plastic
Color:	White
Operation temp:	-10 °C ... 50 °C
Weight:	0.3 kg
Dimensions:	Ø 128 x 92 mm
Supported languages:	English, Chinese, French, Spanish, Dutch, German, Polish, Portuguese, Russian, Turkish, Italian
Guarantee:	2 years

PRESENTATION


Camera view after remove the Dome cover - camera lens adjustment knobs are visible:



Mounting side view:



The appropriate signal format selection is done by tilting and holding the joystick for 5 s without entering to the OSD menu. Changing the signal to the NTSC in the camera causes loss of image in connected AHD recorder:

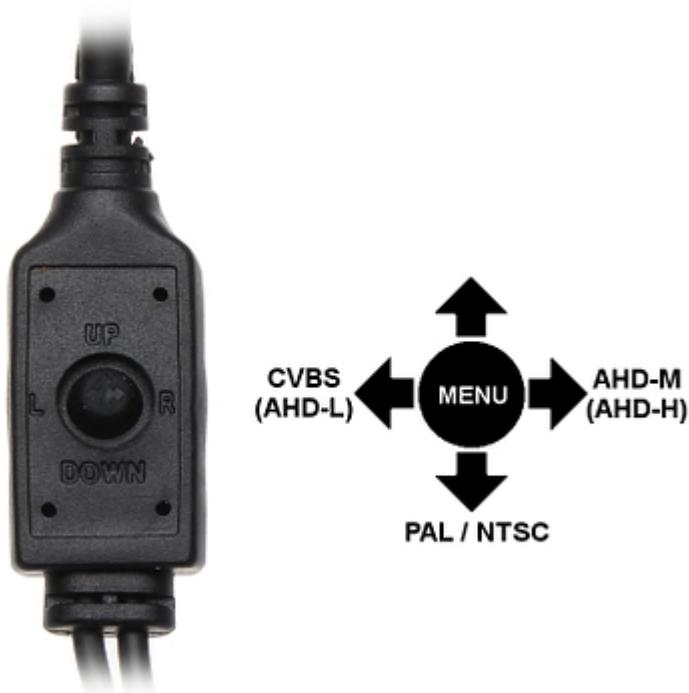

Configuration


- 1) Turn on the power
 - 2) Move the joystick left or right, setting the appropriate resolution
 - 3) Move the joystick down by 5 s, setting the PAL / NTSC
- The PAL and NTSC standard is set regardless of the resolution.

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):

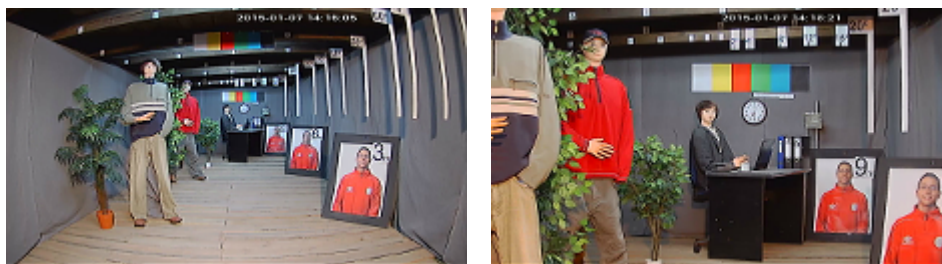

Camera image at night conditions with internal built-in IR illuminator on:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------