

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity; 2. Improper results of operation of the product or products related with it;

3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.







IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.

For a few models of IP cameras working at \geq 1920 x 1080 resolution we recommend to use of network with 1Gb/s bandwidth.

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Scanning system:	Progressive
Lens:	4.3 129 mm
View angle:	 66 ° 2.1 ° (manufacturer data) 59 ° 3.3 ° (our tests result)
Optical zoom:	x 30
Digital zoom:	x 16
Min. illumination:	• 0.05 Lux @ F1.6 (color), • 0.01 Lux @ F1.6 (B/W)
Video output:	-
Preset rotation speed:	300 °/s (horizontal) 200 °/s (vertical)
Rotation speed (manual control):	0.1 °/s 250 °/s (horizontal) 0.1 °/s 150 °/s (vertical)





Horizontal rotation range:	360 ° continuous
Vertical rotation range:	-5 ° 90 °
RS-485 interface:	-
Number of presets:	300
Horizontal scan:	✓
Route settings:	8
Image compression method:	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Bitrate:	32 16384 kbps
Alarm inputs / outputs:	2/1
Audio:	 External microphone input, Audio output, Audio detection
Main stream frame rate:	25 fps @ 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, IEEE 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, ICMP, DHCP, PPPoE
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	16.12
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Main features:	 3D-DNR - Digital Noise Reduction ROI - improve the quality of selected parts of image F-DNR (Defog) - Reduction of image noise caused by precipitation D-WDR - Wide Dynamic Range Parking action - this function enables to locate the camera to specific position automatically if operator doesn't operate the controller for some time Configurable Privacy Zones - 8 ICR - Movable InfraRed filter BLC - Back Light Compensation HLC - High Light Compensation (spot) Sharpness - sharper image outlines Mirror - Mirror image Day/Night mode (color/b&w/auto) Audio detection Intelligent image analysis : crossing the line (tripwire), intrusion
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) • Android: Free application <u>iVMS-4500</u> or <u>Hik-Connect</u> • iOS (iPhone): Free application <u>iVMS-4500</u> or <u>Hik-Connect</u>
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000





User Manual Code: DS-2DE5230W-AE IP SPEED DOME CAMERA OUTDOOR **DS-2DE5230W-AE** - 1080p 4.3 ... 129 mm Hikvision

Port ONVIF:	80
RTSP URL:	 Main stream rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization Sub stream rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization
Power supply:	 PoE (802.3at), 24 V AC / 2.2 A (power adapter included)
Power consumption:	≤ 22 W
Housing:	Speed Dome Metal
Color:	White
"Index of Protection":	IP66
Vandal-proof:	-
Operation temp:	-30 °C 65 °C
Weight:	2.9 kg
Dimensions:	Ø 220 x 305 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Italian
SAP Code:	301309545
Manufacturer / Brand:	Hikvision
Guarantee:	3 years

Bottom view:







Camera view after remove the Dome cover:




Memory card slot:







Connectors:

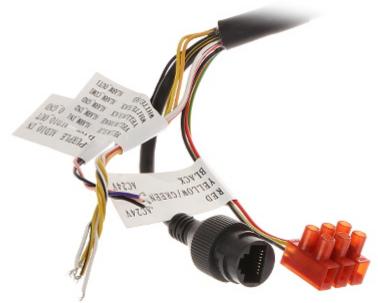

Connectors description:







In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm Gross Weight: 0 kg

