

Code: XVR301-08Q

AHD, HD-CVI, HD-TVI, CVBS, TCP/IP DVR **XVR301-08Q** 8 CHANNELS UNIVIEW

Net: **147.01 EUR** Gross: **147.01 EUR**

The XVR301-08Q digital recorder with AHD (Analog High Definition), HD-CVI (High Definition Composite Video Interface), HD-TVI (High Definition Transport Video Interface), TCP/IP and CVBS interface is a professional device applicable in surveillance systems.

The menu options layout has been designed for all users, even beginners can easy navigate and change parameters in DVR settings without any problem.



SPECIFICATION

Standard:	AHD, HD-CVI, HD-TVI, CVBS, TCP/IP
Video inputs:	8 pcs BNC - AHD / HD-CVI / HD-TVI / CVBS
Video outputs:	<ul style="list-style-type: none">• 1 pcs HDMI• 1 pcs VGA• 1 pcs CVBS - BNC socket
Audio inputs:	<ul style="list-style-type: none">• 1 pcs CINCH,• 8 Channels - Coaxial audio - Audio support via coaxial cable
Audio outputs:	1 pcs CINCH
Image compression method:	H.265 / H.264
Image records resolutions:	<ul style="list-style-type: none">• HD-TVI / AHD : 8M-N - 1920 x 2160 - Channel 1 / 2 , 5M-N - 1296 x 1944 , 4M-N - 1280 x 1440 , 3 Mpx - 1920 x 1536 - Channel 1 / 2 , 1080p - 1920 x 1080 , 720p - 1280 x 720 ,• HD-CVI 8M-N - 1920 x 2160 - Channel 1 / 2 , 5M-N - 1296 x 1944 , 4M-N - 1280 x 1440 , 1080p - 1920 x 1080 , 720p - 1280 x 720 ,• PAL : 960H - 960 x 576 ,• IP : max. 8 Mpx - 3840 x 2160 4K UHD
Recording speed adjustment:	<ul style="list-style-type: none">8 Mpx IP @ 1 ... 25 fps8M-N @ 1 ... 8 fps5M-N @ 1 ... 12 fps4M-N @ 1 ... 15 fps3 Mpx @ 1 ... 15 fps1080p @ 1 ... 15 fps720p @ 1 ... 25 fps960H @ 1 ... 25 fps for each channel

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Operation modes:	• 8 x HD-TVI / AHD / HD-CVI / CVBS / IP + 4 x IP
Recording modes:	Manual, Motion Detection, Schedule
Supported hard drives:	1 x 6 TB SATA
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: timeline or file list. Playback: forward, backward, fast, slow. All channels synchronous playback, Smart Search function
Network interface:	1 x RJ-45 - 10/100 Base-TX
Bitrate:	max. 56 Mbps
Network functions:	Live image view, Playback the records, Remote configuration, Web-Server built-in, 128 on-line users
Network protocols:	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Mobile phones support:	Port no.: 80 or access by a cloud (P2P) • Android: Free application EZView • iOS (iPhone): Free application EZView
Default IP address:	DHCP or 192.168.1.30
Default admin user / password:	admin / 123456
Web browser access ports:	80, 554
PC client access ports:	Port no.: 80 or access by a cloud (P2P) - PC: Free application EZStation
Mobile client access ports:	80
RTSP URL:	rtsp://192.168.1.30:554/unicast/c1/s0/live - Main stream rtsp://192.168.1.30:554/unicast/c1/s1/live - Sub stream
Alarm inputs / outputs:	—
PTZ control:	RS-485 - PELCO-D/P PTZ Uniview cameras
Motion Detection:	✓
USB:	2 x USB 2.0
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	12 V DC / 2 A (power adapter included)
Color:	Black
Weight:	0.99 kg
Dimensions:	260 x 252 x 46 mm
Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Portuguese, Slovak, Italian, Hungarian
Country of origin:	China
Manufacturer / Brand:	UNIVIEW
Guarantee:	3 years

PRESENTATION

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Rear panel:




See how to mount a hard disk drive and configure the recorder:

:
In the kit:



Example captures of device interface:



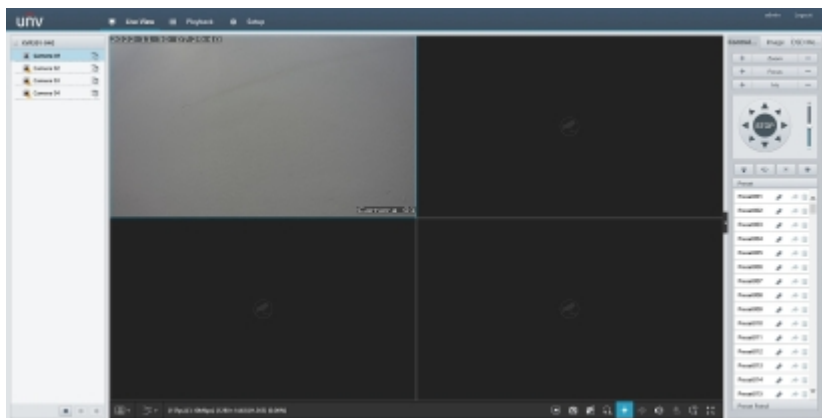

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

