

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity; 2. Improper results of operation of the product or products related with it;

3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.





User Manual Code: BCS-L-TIP12FSR3-W IP CAMERA **BCS-L-TIP12FSR3-W** Wi-Fi, 2.1 Mpx - 1080p 2.8 mm BCS Line

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 1920 x 1080 (1080p).

The Wi-Fi module used in the device allows the device to operate also in places with limited wiring possibilities.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).



Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	2.8 mm, F2.0
View angle:	 100 ° (manufacturer data) 97 ° (our tests result)
Range of IR illumination:	30 m
Image compression method:	H.265+ / H.265 / H.264+ / H.264
Alarm inputs / outputs:	-
Audio:	Microphone built-inAudio detection
Main stream frame rate:	25 fps @ 1080p
Network interface:	10/100 Base-T (RJ-45), 2.4 GHz Wi-Fi IEEE 802.11 b/g/n
Network protocols:	IPv4, HTTP, TCP, UDP, ARP, RTP, RTSP, RTCP, DHCP, DNS, NTP, Multicast, RTMP
WEB Server:	Built-in, NVR compliance, 20 on-line users



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



User Manual Code: BCS-L-TIP12FSR3-W IP CAMERA **BCS-L-TIP12FSR3-W** Wi-Fi, 2.1 Mpx - 1080p 2.8 mm BCS Line

ONVIF:	21.06
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Mobile phones support:	Access by a cloud (P2P) • Android: Free application <u>BCS Manager</u> • iOS (iPhone): Free application <u>BCS Manager</u>
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	DHCP
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	 Wi-Fi module - 2.4 GHz IEEE 802.11 b/g/n ; Antenna - SMA socket D-WDR - Wide Dynamic Range 3D-DNR - Digital Noise Reduction ROI - improve the quality of selected parts of image BLC/HLC - Back Light / High Light Compensation D-ZOOM - Digital Zoom 16 x Mirror - Mirror image Day/night mode ICR - Movable InfraRed filter Auto White Balance Configurable Privacy Zones Motion Detection
Housing:	Compact - Metal
Color:	White
"Index of Protection":	IP67
Power supply:	12 V DC / 350 mA
Power consumption:	max. 4.1 W
Operation temp:	-40 °C 60 °C
Weight:	0.48 kg
Dimensions:	Ø 70 x 166 mm
Supported languages:	Polish, English
Manufacturer / Brand:	BCS Line
Guarantee:	3 years

Front view:



BCS-L-TIP12FSR3-W





Side view:



Memory card slot and "Reset" button:



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

BCS-L-TIP12FSR3-W





Antenna connector:



Camera mounting side view:




DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

BCS-L-TIP12FSR3-W



User Manual Code: BCS-L-TIP12FSR3-W IP CAMERA **BCS-L-TIP12FSR3-W** Wi-Fi, 2.1 Mpx - 1080p 2.8 mm BCS Line

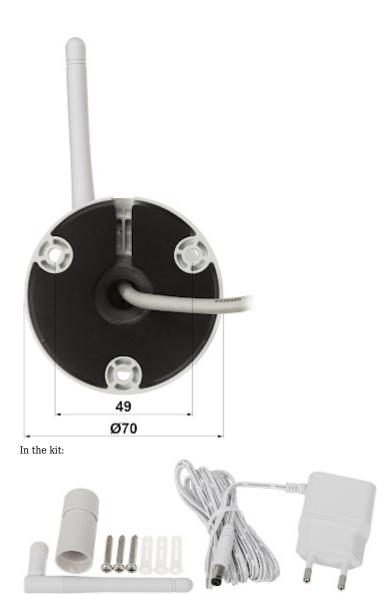

PACKAGE

Dimensions (L x W x H): 0x0x0 mm Gross Weight: 0 kg

