

Code: ATR-4R

VIDEO BALUN ATR-4R

Net: 21.29 EUR Gross: 21.29 EUR

The ATR-4R is designed to signal transmission via twisted-pair cable for longer distance, ensuring signal transmission up to 1500 meters. It is important to pay attention to linking the adequate terminals: (+) and (-).

The ATR-4R can also work together with passive devices designed to signal transmission via twisted-pair cable.



SPECIFICATION

Standard:	CVBS - PAL, NTSC
Device type:	Active / Receiver
Power supply:	12 V / 120 mA
Number of channels:	4
Signal distance range:	max. 1500 m
Video bandwidth:	0 ... 6 MHz (-3 dB)
Coaxial socket impedance:	75 Ω
Symmetrical socket impedance:	100 Ω
LED indicators:	green LED - video signal detection red LED - power on
Coaxial socket type:	2 x 4 BNC socket - Splitter 1 / 2
Symmetrical socket type:	RJ-45 (8-pin, 4 pairs) Socket / Cable terminals
Operation temp:	-20 °C ... 70 °C
Permissible relative humidity:	< 95 %
Weight:	0.574 kg
Dimensions:	191 x 97 x 33 mm
Guarantee:	2 years

PRESENTATION


Front panel:



Device connectors:



Connection diagram:

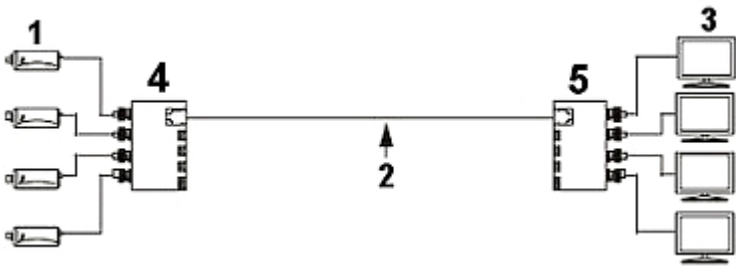

- 1. Cameras
- 2. Twisted-pair cable
- 3. Monitors
- 4. Transmitter
- 5. Receiver

Jumper settings for different distances:

1	0-300m	300-400m	400-500m	500-600m	600-700m	700-800m
2	900-1000m	1000-1100m	1100-1200m	1200-1300m	1300-1400m	1400-1500m
	OFF ON 1 2 3 4	OFF ON 1 2 3 4	OFF ON 1 2 3 4	OFF ON 1 2 3 4	OFF ON 1 2 3 4	OFF ON 1 2 3 4

- 1. passive
- 2. active

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------