

Code: ATT-1-TX

VIDEO BALUN **ATT-1-TX** TRANSMITTER

Net: **7.38 EUR** Gross: **7.38 EUR**

The ATT-1-TX is designed to signal transmission via twisted-pair cable for longer distance, ensuring signal transmission up to 2000 meters.

The ATT-1-TX can also work together with passive devices designed to signal transmission via twisted-pair cable. It is important to pay attention to linking the adequate terminals: (+) and (-).



SPECIFICATION

Standard:	• CVBS - PAL, NTSC
Device type:	Active - Transmitter
Power supply:	12 V / 50 mA
Number of channels:	1
Signal distance range:	max. 2000 m - Transmission range with using active receiver
Video bandwidth:	0 ... 8 MHz (-3 dB)
Coaxial socket impedance:	75 Ω
Symmetrical socket impedance:	100 Ω
LED indicators:	✓
Coaxial socket type:	BNC Straight socket
Symmetrical socket type:	Cable terminals
Operation temp:	0 °C ... 55 °C
Permissible relative humidity:	< 95 %
Weight:	0.084 kg
Dimensions:	81 x 78 x 30 mm
The distance switch (LEVEL) settings cause the initial signal correction:	• L 400 ... 1200 m • M 1200 ... 1800 m • H > 1800 m
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Front view:



1. Initial signal correction


Rear view:



Top view:



Connection diagram:

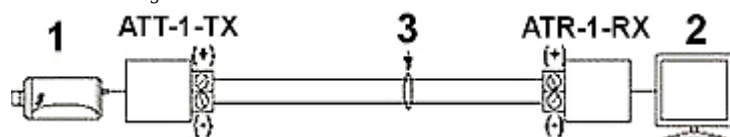

- 1) Camera
- 2) Monitor
- 3) Twisted-pair cable (1 pair)

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------