

Code: BCS-DMMIP1401AIR

IP VANDALPROOF CAMERA **BCS-DMMIP1401AIR** - 4.0 Mpx 2.8 mm

Net: **181.50 EUR** Gross: **181.50 EUR**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 2688 x 1520 (4.0 MPx). Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. The camera has a very flat profile, it's only 51 mm out from the ceiling.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Matrix size:	4.0 Mpx
Scanning system:	Progressive
Resolution:	2688 x 1520 - 4.0 Mpx 2560 x 1440 - 3.6 Mpx 2304 x 1296 - 3.0 Mpx 1920 x 1080 - 1080p 1280 x 1024 - 1.4 Mpx 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Lens:	2.8 mm
View angle:	106 °
Range of IR illumination:	20 m
S/N ratio:	> 50 dB
RS-485 interface:	—
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Image compression method:	H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none">• External microphone input• Audio output• Bi-directional audio streaming support• Audio detection
Bitrate:	384 ... 10240 kbps - H.264
Main stream frame rate:	20 fps @ 4.0 Mpx 25 fps @ 3.0 Mpx
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
WEB Server:	Built-in
Max. number of on-line users:	20

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

ONVIF:	2.42
Mobile phones support:	Port 37777 <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Default IP address:	192.168.1.108
Default admin user / password:	admin / admin
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	<ul style="list-style-type: none"> • 3D-DNR - Digital Noise Reduction • WDR - 120 dB - Wide Dynamic Range • BLC/HLC - Back Light / High Light Compensation • Possibility to change the resolution, quality and bit rate • Audio detection • Configurable Privacy Zones • Mirror - Mirror image • IVS analysis : crossing the line (tripwire), intrusion, scene changing, abandoned/missing object
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 410 mA
Power consumption:	≤ 5 W
Housing:	Dome, Metal
Color:	White
Vandal-proof:	✓
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Weight:	0.344 kg
Dimensions:	Ø 106 x 51 mm
Supported languages:	English, Polish
Manufacturer / Brand:	BCS
Guarantee:	2 years For products purchased after 01.01.2018, a 3-year warranty applies

PRESENTATION

Camera view after remove the Dome cover:







Memory card slot:



Mounting side view:

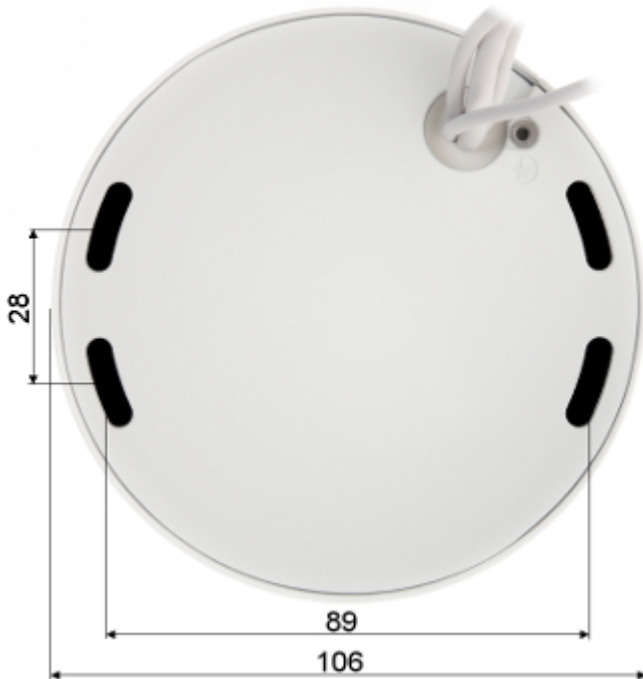

Connectors description:

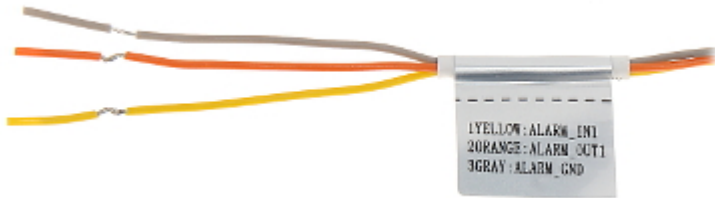

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- The camera has a very flat profile, it's only 51 mm out from the ceiling.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

