



User Manual

Code: ATLO-AZ-WG13A-TUYA
ALARM KIT ATLO-AZ-WG13A-TUYA

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order.

If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.

The ATLO-AZ-WG13A-TUYA alarm set is an ideal solution for people looking for a simple and reliable alarm system for home applications.

The device has the ability to work with the Tuya Smart application for mobile devices.

Tuya is an international home automation platform that connects thousands of products made by different manufacturers. The system can support all the most popular communication protocols such as Wi-Fi, Zigbee, Bluetooth.

Thanks to wireless communication between the system components and its simple and intuitive configuration by phone, SMS or via a mobile application, there is no need to call the installer to install the devices.

Attention! The GSM module built into the device does not support mobile data transmission.



Aspect ratios:	2.4 " TFT LCD
Number of supported wireless devices:	max. 30 pcs
Number of supported remote control keyfobs:	max. 8 pcs, In the kit : 2 pcs
The RFID cards/keyfobs support:	Unique EM 125kHz
Number of supported wireless sirens:	1 pcs
PIR detectors included:	1 pcs, Wireless
Magnetic contact included:	1 pcs, Wireless
Keyboard included:	✓
Expander included :	—
Wireless:	433 MHz
Mobile phones support:	Access by a cloud (P2P) • The Tuya Smart free application on Android • The Tuya Smart free application on iOS
Zones:	99 (wireless zones)
Timers:	✓
Users + admins:	6
Default administrator password:	6666
Default user password:	1234



User Manual

Code: ATLO-AZ-WG13A-TUYA
ALARM KIT **ATLO-AZ-WG13A-TUYA**

Built-in modules:	GSM, WiFi
Access from PC:	—
Mobile phones support:	Remote control of the control panel via SMS, Tuya Smart application
Main features:	• Bidirectional communication, • SMS notification about alarm and power failure, • LED indication, • LCD display, • Built-in alarm siren - 100 dB, • Alarm mute function
Supported languages:	Chinese, English, German, Russian, Spanish, Polish, Italian, French, Portuguese, Greek, Romanian
Power supply:	• 5 V DC / 2 A (power adapter included) • Built-in battery that maintains the control panel operation during a power failure : 3.7 V / 1000 mAh
Housing:	Plastic
Color:	Black
Operation temp:	-10 °C ... 55 °C
Weight:	0.2 kg
Dimensions:	185 x 125 x 14 mm

MAGNETIC CONTACT:

Detection:	Opening the door or window
Alarm signaling:	Signal to control panel
Frequency range:	433 MHz
Alarm inputs:	—
Battery:	1 x CR2032 3V (included)
Weight:	• 0.02 kg - Transmitter • 0.01 kg - Magnet
Dimensions:	• 60 x 23 x 13 mm - Transmitter • 40 x 13 x 10 mm - Magnet

PIR DETECTOR:

Battery power supply:	2 x 1.5V, type AAA/LR03 battery (included)
Frequency range:	433 MHz
Radio communication range (at open area):	max. 30 m
Detection angle / Detection range:	120 ° / 12 m (max)
Main features:	Code 1527 data encryption
Weight:	0.06 kg
Dimensions:	105 x 40 x 27 mm

REMOTE CONTROL:

Frequency band:	433 MHz
-----------------	---------



User Manual

Code: ATLO-AZ-WG13A-TUYA
ALARM KIT **ATLO-AZ-WG13A-TUYA**

Main features:	• LED indication • One-touch action buttons : arm, disarm, arming only perimeter protection zones, SOS
Battery:	1 x CR2025 (included)
Weight:	0.02 kg
Dimensions:	58 x 32 x 11 mm


INDOOR SIREN:

Connector:	Jack 3.5 mm
Sound pressure level:	120 dB
Color:	White
Weight:	0.06 kg
Dimensions:	63.5 x 54 x 47.5 mm

General information:

Manufacturer / Brand:	ATLO
Guarantee:	2 years

Alarm control panel:

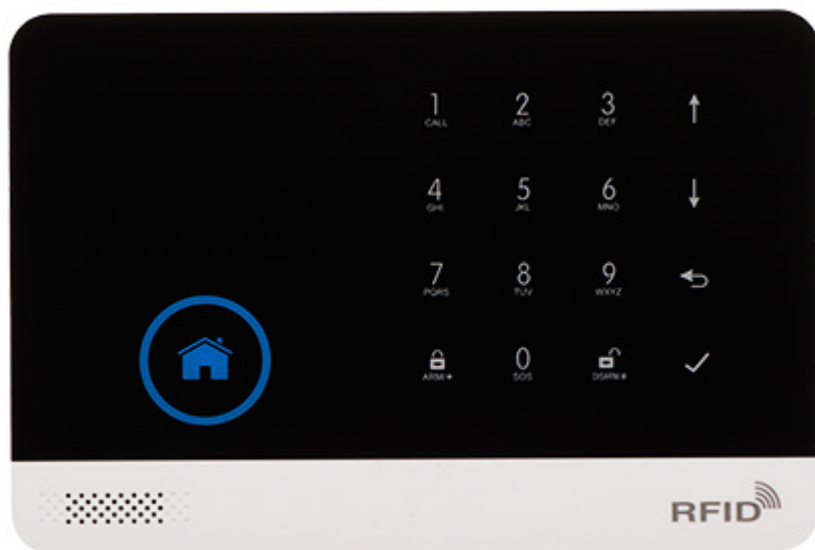

Side view:



Rear view:



In the kit:



Example screenshots:



User Manual

Code: ATLO-AZ-WG13A-TUYA
ALARM KIT ATLO-AZ-WG13A-TUYA

< Dodaj urządzenie

Wyszukiwanie urządzeń w pobliżu. Upewnij się, że urządzenie jest w trybie parowania.

Discovering devices...

Add

Dodaj ręcznie

Urządzenia elektryczne

Socket

Oświetlenie

Czujnik ochrony

Dobre urządzenie domowe

Male urządzenie domowe

Urządzenie kuchenne

Urządzenie medyczne do no...

Abonat i

Power Strip

Gniazdo elektr. (BLU+Wi-Fi)

Gniazdo elektr. (Wi-Fi)

Gniazdo elektr. (Zigbee)

Gniazdo elektr. (BLU)

Dualband Plug (2.4GHz&5GHz)

Gniazdo elektr. (NB-IoT)

Gniazdo elektr. (other)

×

Dodaj urządzenie

1 dodano pomyślnie

Multifunction alarm
Added successfully

Zakończ



User Manual

Code: ATLO-AZ-WG13A-TUYA
ALARM KIT ATLO-AZ-WG13A-TUYA

Anuluj Edycja urządzenia Zapisz

Nazwa akcesoriów >

Przypisz strefę Aktywny tryb domowy >

Ustawienia

Rodzaj urządzenia System alarmowy >

Przypisz strefę

Aktywny tryb domowy ☒

Aktywny tryb poza domem

Aktywny tryb 24H

Zamknij

Dzwonek do drzwi

Anuluj Potwierdź

< Zapis z historii

Dzisiaj	
11:21:09	Normal
11:21:09	Rozbrojony
11:20:58	SOS Strefa:000
11:20:58	Alarm
11:20:58	SOS
11:20:53	Tryb Domowy
11:20:46	Uzbrojony
11:20:19	Rozbrojony
2024-01-23	
15:03:10	Rozbrojony
15:03:09	Tryb Domowy





DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



User Manual



Code: ATLO-AZ-WG13A-TUYA
ALARM KIT ATLO-AZ-WG13A-TUYA

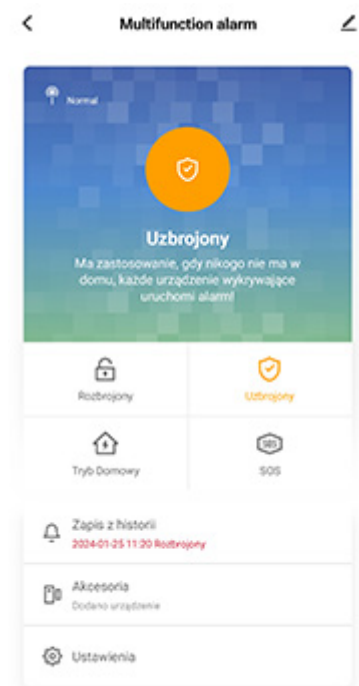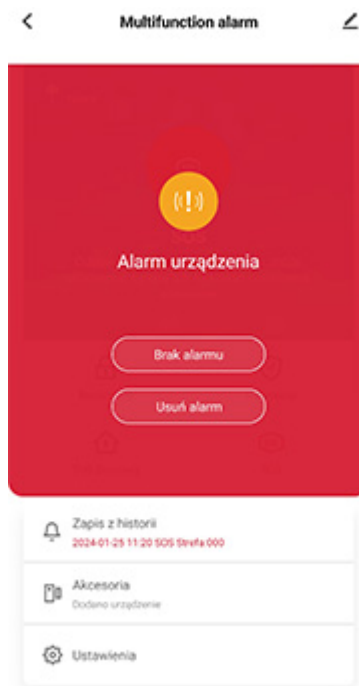



User Manual

Code: ATLO-AZ-WG13A-TUYA
ALARM KIT ATLO-AZ-WG13A-TUYA

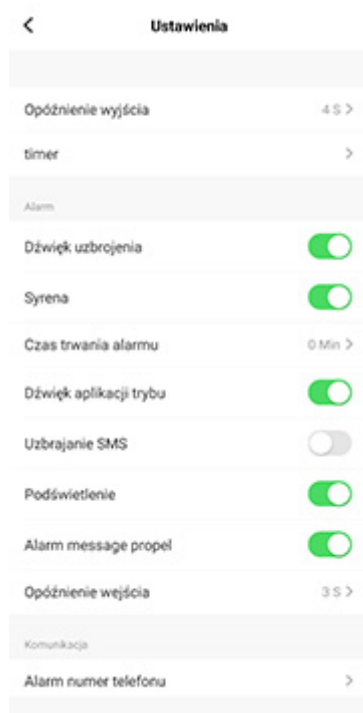
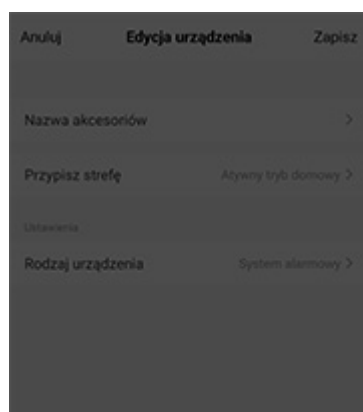


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



User Manual

Code: ATLO-AZ-WG13A-TUYA
ALARM KIT ATLO-AZ-WG13A-TUYA

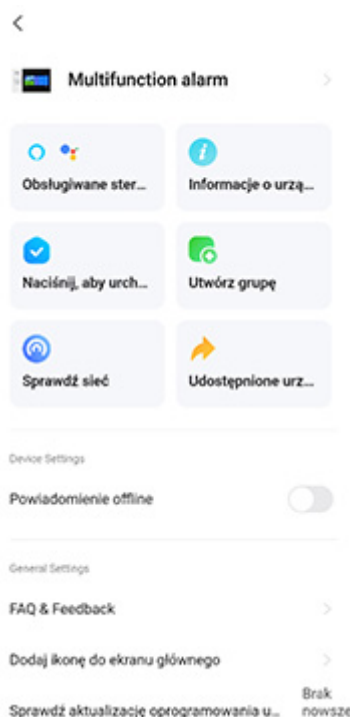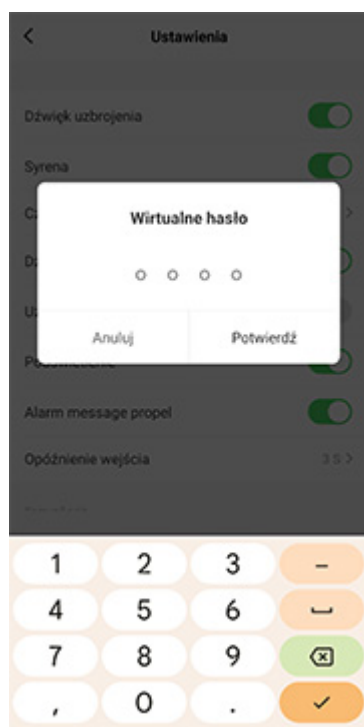

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



User Manual

Code: ATLO-AZ-WG13A-TUYA
ALARM KIT **ATLO-AZ-WG13A-TUYA**
