

## Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity;
2. Improper results of operation of the product or products related with it;
3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

### Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The TR-1RJ-HD\*P2 is designed to video signals transmission and power supplying via twisted-pair cable (UTP, FTP). The device adapts the impedance of coaxial cable 75  $\Omega$  to the impedance of symmetrical line, ensuring transmission of video signal up to 250m @ 720p / 150m @ 1080p (twisted-pair cable category 5e) and eliminates asymmetric interferences.



In package:	2 pcs The price for package
Standard:	<ul style="list-style-type: none"> <li>• AHD - 8 Mpx 4K UHD,</li> <li>• HD-CVI - 8 Mpx 4K UHD,</li> <li>• HD-TVI - 8 Mpx 4K UHD,</li> <li>• CVBS - PAL, NTSC</li> </ul>
Device type:	Passive

Number of channels:	1 Video, 1 DC
Coaxial socket voltage range 75Ω (CVBS):	1 Vpp
Video transmission range:	<ul style="list-style-type: none"> <li>• 250 m @ 720p - UTP cat. 5e</li> <li>• 150 m @ 1080p - UTP cat. 5e</li> <li>• 400 m @ CVBS - PAL, NTSC - UTP cat. 5e</li> </ul>
Attenuation:	<ul style="list-style-type: none"> <li>• 4.43 MHz @ 0.64 dB</li> <li>• 11 MHz @ 0.85 dB</li> <li>• 21 MHz @ 1.09 dB</li> <li>• 38 MHz @ 1.19 dB</li> <li>• 42 MHz @ 1.23 dB</li> <li>• 67.5 MHz @ 2.06 dB</li> </ul>
Symmetrical socket impedance:	100 Ω
Connectors type:	Video - BNC Plug with cable Power supply - Socket / Plug 2.1/5.5 mm
Symmetrical socket type:	RJ-45 (8-pin, 4 pairs) Socket
Permissible relative humidity:	< 95 %
Operation temp:	-50 °C ... 55 °C
Power supply distance:	Power supply 12V DC : 150 m @ 110 mA 100 m @ 160 mA 50 m @ 330 mA 30 m @ 550 mA
Weight:	0.030 kg
Dimensions:	41 x 19.3 x 19.2 mm
Guarantee:	2 years



Connectors view:




The device is tiny sizes:




The transformers have been equipped with RJ-45 plugs backlight signaling that the device is live:



Wiring sequence inside the RJ-45 plug:

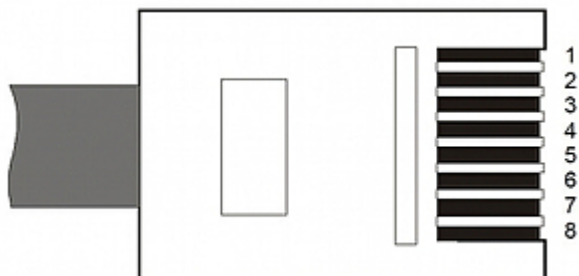

- 1) White/Orange - video signal (+)
- 2) Orange - video signal (-)
- 3) White/Green - power supply 12V (+)
- 4) Blue - power supply 12V (+)
- 5) White/Blue - power supply 12V (+)
- 6) Green - power supply 12V (-)
- 7) White/Brown - power supply 12V (-)
- 8) Brown - power supply 12V (-)

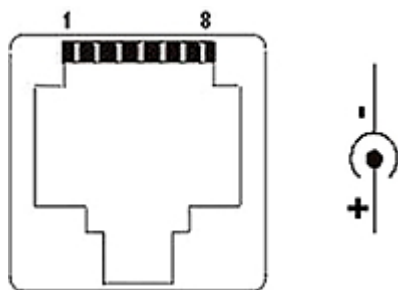

Power plug polarization  
Package:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------