

# Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity; 2. Improper results of operation of the product or products related with it;

3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

#### Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

#### Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.





### User Manual Code: IPC-F42FEP IP CAMERA IPC-F42FEP Wi-Fi BULLET 2 4MP Full-Color - 4 Mpx 2.8 mm IMOU

The cameras of the IMOU series have been designed with special care to simplify the configuration and operation. In combination with the user friendly IMOU platform, the IMOU series devices allow anyone to create a simple and effective surveillance system.

Very easy operation via mobile devices (Android / iOS), allows the users for comfortable and remote operation, and also management of the camera. Camera is according to IP67 Index of Protection norm.

In addition, the camera has the function of active deterrence of intruders using a motion-activated white light LED spotlight and siren sound.

**Attention!** The IMOU series devices do not have a WEB interface. In order to obtain optimal performance of IMOU series cameras, it is recommended to use DAHUA Micro SD memory cards.



| Standard:                          | TCP/IP  |
|------------------------------------|---|
| Sensor:                            | 1/2.7 " Progressive Scan CMOS   |
| Matrix size:                       | 4 Mpx   |
| Resolution:                        | 2560 x 1440 - 4 Mpx   |
| Lens:                              | 2.8 mm  |
| View angle:                        | 104 °   |
| White light LED illuminator range: | 30 m  |
| Audio:                             | <ul> <li>Microphone built-in,</li> <li>Speaker built-in,</li> <li>Alarm siren 110 dB</li> <li>Audio transmission via network</li> <li>Bi-directional audio streaming support</li> </ul> |
| Image compression method:          | H.265 / H.264   |
| Main stream frame rate:            | 25 fps @ 4 Mpx  |
| Network protocols:                 | TCP, DHCP   |
| ONVIF:                             | ×   |
| Network interface:                 | • Ethernet : 100 Mbps<br>• Wi-Fi IEEE 802.11 b/g/n - 2.4 GHz  |



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



## User Manual Code: IPC-F42FEP IP CAMERA IPC-F42FEP Wi-Fi BULLET 2 4MP Full-Color - 4 Mpx 2.8 mm IMOU

| WEB Server:                    | _   |
|--------------------------------|---|
| Mobile phones support:         | Access by a cloud (P2P)<br>• Android: Free application <u>IMOU</u><br>• iOS (iPhone): Free application <u>IMOU</u>  |
| Default admin user / password: | admin / -<br>The administrator password should be set at the first start  |
| Default IP address:            | DHCP  |
| Web browser access ports:      | -   |
| PC client access ports:        | -   |
| Mobile client access ports:    | -   |
| Port ONVIF:                    | -   |
| RTSP URL:                      | -   |
| Memory card slot:              | Micro SD memory cards up to 256GB support (possible local recording)  |
| Main features:                 | <ul> <li>Wi-Fi module - IEEE 802.11 b/g/n,</li> <li>MIMO technology - increases the throughput of wireless link (multiple antennas transmission)</li> <li>Motion Detection</li> <li>People detection</li> <li>D-ZOOM - Digital Zoom : 16x</li> <li>Built-in alarm siren</li> <li>LED Floodlight</li> <li>Full Color - colorful night mode</li> <li>Active deterrence function</li> <li>Light and sound alarm</li> <li>IMOU Cloud</li> <li>RESET button</li> </ul> |
| Power supply:                  | 12 V DC / 1 A (power adapter included)  |
| Power consumption:             | < 7 W   |
| "Index of Protection":         | IP67  |
| Weight:                        | 0.35 kg   |
| Dimensions:                    | 148 x 74 x 74 mm  |
| Supported languages:           | 1   |
| Manufacturer / Brand:          | DAHUA / IMOU  |
| Guarantee:                     | 2 years   |

Front view:







Side view:



Bottom view:



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60






Memory card slot:



Mounting side view:





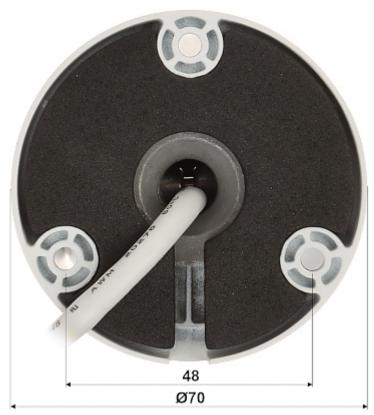

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm Gross Weight: 0 kg



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



