

Warning!

Please read the user manual included in this work as it contains important information related with safety of installation and use of the device.

Only persons who read the user manual may use the device.

The user manual must be kept because it may be required in the future. The device is to be used exclusively for purposes specified in this user manual.

The device must be unpacked prior to starting-up. After removing the packaging make sure the device is in working order. If the product has defects, it should not be used until it is repaired.

The product is intended for use at home and commercial use and may not be used for other than intended use.

The manufacturer is not liable for damages resulting from not adhering to the rules contained in the user manual, therefore, we recommend to follow the aforementioned safety rules for operation and maintenance of the device. In this way you will ensure yourself safety and avoid causing damage to the device.

The manufacturer and the supplier are not liable for losses or damages arising out of the product, including financial or intangible losses, loss of profits, income, data, pleasure from use of the product or other products related with it - indirect, incidental or consequential loss or damage. The above provisions apply whether the loss or damage concerns:

1. Deterioration of quality or the lack of operation of the products or products related with it due to damage as well as the lack of access to the product when it is undergoing repair, which results in stoppage the loss of user's time or a break in business activity; 2. Improper results of operation of the product or products related with it;

3. It applies to losses and damages according to any legal category, including negligence and other losses, termination of a contract, expressed or implied guarantee and strict liability (even if the manufacturer or the supplier was notified about the possibility of occurrence of such damages).

Safety measures:

Particular attention at designing was directed to quality standards of the device where ensuring safety of operation is the most important factor.

The device must be secured against contact with caustic, staining and viscous fluids.

The device was designed in such a way that it restarts operation when power supply is restored after a break.

Attention! We recommend using protections to further protect the device from possible overvoltages in installations. Surge protectors are effective protection against accidental pass to the device voltages higher than the rated. Damages caused by pass the voltages higher than specified in manual, are not under warranty.

Turn off the device before transporting it.

Prior to connecting the device to a power source check whether the supplied voltage is consistent with rated voltage specified in the user manual.

Proper product disposal:

A marking of a crossed out waste bin indicates that the product may not be disposed together with other household waste in the entire EU. To avoid possible damage to the natural environment of health due to uncontrolled waste disposal, therefore, it should be handed over for recycling, propagating in this way sustainable use of natural resources.

To return a worn-out product, use a collection and disposal system of this type of equipment or contact a seller from whom it was purchased. He will then be recycled in an environmentally-friendly way.





IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 8.3 MPx, 4K UHD. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

The used motozoom lens with $2.7 \dots 12$ mm focal length allows to remote view angle adjustment. Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

Camera is according to IP67 Index of Protection norm.



Standard:	TCP/IP
Sensor:	1/1.8 " Progressive Scan CMOS
Matrix size:	8.3 Mpx 4K UHD
Resolution:	3840 x 2160 - 8.3 Mpx 4K UHD , 3072 x 2048 - 6 Mpx , 3072 x 1728 - 5 Mpx , 2592 x 1944 - 5 Mpx , 2688 x 1520 - 4 Mpx , 2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 2048 x 1536 - 3 Mpx , 2048 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	2.7 12 mm - Motozoom
View angle:	 113 ° 47 ° (manufacturer data) 106 ° 47 ° (our tests result)
Compression:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Range of IR illumination:	60 m
Alarm inputs / outputs:	1/1
Main stream frame rate:	25 fps @ 8 Mpx
Network interface:	10/100 Base-T (RJ-45)





User Manual

Code: IPC-HFW3842T-ZAS-2712-BLACK IP CAMERA IPC-HFW3842T-ZAS-2712-BLACK - 8.3 Mpx 4K UHD 2.7 ... 12 mm - MOTOZOOM DAHUA

Audio:	 Microphone built-in, Audio input Audio output Bi-directional audio streaming support Audio detection Compliance with the AAC standard
WEB Server:	Built-in
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Max. number of on-line users:	20
ONVIF:	22.06
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application <u>DMSS</u> • iOS (iPhone): Free application <u>DMSS</u>
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:hasło@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	 WDR - 120 dB - Wide Dynamic Range 3D-DNR - Digital Noise Reduction EIS - Electronic Image Stabilization ROI - improve the quality of selected parts of image F-DNR (Defog) - Reduction of image noise caused by precipitation Quick Pick - AI technology enabling, together with the recorder, quick identification of interesting objects (people/vehicles) based on an artificial intelligence algorithm. It allows to extract and compare the colors of clothes and vehicles AI SSA AI Smart Scene Adaptive - scene auto-adaptation using deep learning algorithms to detect environmental conditions such as rain, fog, backlight, low light and flickering, in order to set the optimal image parameters AFSA - Anti-flicker Self-adaption - The technology eliminates the tiring eyes flickering image effect SMD 4.0 - searching for an object classified as: human, motor vehicle - increased detection distance and resistance to false alarms BLC - Back Light Compensation HLC - High Light Compensation (spot) ICR - Movable InfraRed filter AGC - Automatic Gain Control Motion Detection - max. 4 zones Privacy zones - max. 4 Auto White Balance IVS analysis : crossing the line (tripwire), intrusion - classification of people and vehicles)
Power supply:	• PoE (802.3af), • 12 V DC / 740 mA
Power consumption:	• $\leq 8.9 \text{ W} \textcircled{0} 12 \text{ V DC}$ • $\leq 10.4 \text{ W} \textcircled{0} \text{PoE}$



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Housing:	Compact, Metal
Color:	Black
"Index of Protection":	IP67
Operation temp:	-30 °C 60 °C
Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Portuguese, Russian, Romanian, Turkish, Hungarian, Italian
Weight:	0.84 kg
Dimensions:	239 x 91 x 91 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

Front view:



Side view:



Mounting side view:



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

2024-05-12





Memory card slot and "Reset" button:



Camera connectors:








19ROWS: ALARN_OUT 2GREEN: ALARN_OUT_OND 3BLEE: ALARN_INI 4GRAT: ALARN_IN_OND

Dimensions:

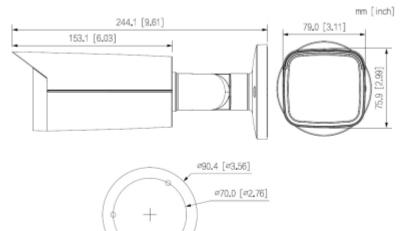

3-#4.7 [#0.19]



DELTA-OPTI Monika Matysiak; https://www.delta.poznan.pl POL; 60-713 Poznań; Graniczna 10 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



See how to initialize DAHUA cameras:

. In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm Gr	oss Weight: 0 kg
-------------------------------------	------------------

