

Code: DS-2CD2026G2-IU/SL(2.8MM)

IP CAMERA **DS-2CD2026G2-IU/SL(2.8MM)** ACUSENSE - 1080p Hikvision

Net: **259.38 EUR** Gross: **259.38 EUR**

IP camera with efficient H.265+ / H.264+ image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.

Camera is according to IP67 Index of Protection norm. Powered by Darkfighter - the camera has very good sensitivity, dedicated to poor lighting conditions.



SPECIFICATION

Standard:	IP
Resolution:	1920 x 1080 - 1080p , 1280 x 720 - 720p
Sensor:	1/2.8 " Progressive Scan CMOS
Lens:	2.8 mm
View angle:	107 °
Compression:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Range of IR illumination:	40 m
Audio:	<ul style="list-style-type: none">• Microphone built-in,• Speaker built-in - Alarm siren
Alarm inputs / outputs:	—
Memory card slot:	Micro SD card support up to 256GB
Main stream frame rate:	25 fps @ 4 Mpx
Network interface:	10/100 Base-T (RJ-45)
WEB Server:	Built-in
Max. number of on-line users:	6
ONVIF:	✓
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) <ul style="list-style-type: none">• Android: Free application Hik-Connect• iOS: Free application Hik-Connect
Default IP address:	192.168.1.64

Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	<ul style="list-style-type: none"> • Main stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ • Sub stream : rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/
Intelligent image analysis:	<ul style="list-style-type: none"> • crossing the line (tripwire) • intrusion • detection of entry into the area / exit from the area • classification of people and vehicles • scene changing • face detection
Main features:	<ul style="list-style-type: none"> • Active deterrence function - Light and sound alarm • WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • BLC/HLC - Back Light / High Light Compensation • ROI - improve the quality of selected parts of image • ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its • NAS - Network Attached Storage support - allows to connect memory resources directly to the computer network • Anti-Flicker - The technology eliminates the tiring eyes flickering image effect • Day/night mode • ICR - Movable InfraRed filter • Auto White Balance • AGC - Automatic Gain Control • Possibility to change the resolution, quality and bit rate • Sharpness - sharper image outlines • Mirror - Mirror image • Configurable Privacy Zones • Motion Detection • Filtering of false alarms based on the recognition of persons and vehicles
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af), • 12 V DC / 540 mA
Power consumption:	<ul style="list-style-type: none"> • ≤ 8 W @ PoE (802.3af) • ≤ 6.5 W @ 12 V DC
Housing:	Compact, Metal
Color:	White
"Index of Protection":	IP67
Operation temp:	-30 °C ... 60 °C
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Ukrainian, Hungarian, Vietnamese, Italian
Weight:	0.59 kg
Dimensions:	Ø 74 x 191 mm
Manufacturer / Brand:	Hikvision
SAP Code:	311312612
Guarantee:	3 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:




Memory card slot:



Speaker:



Camera mounting side view:

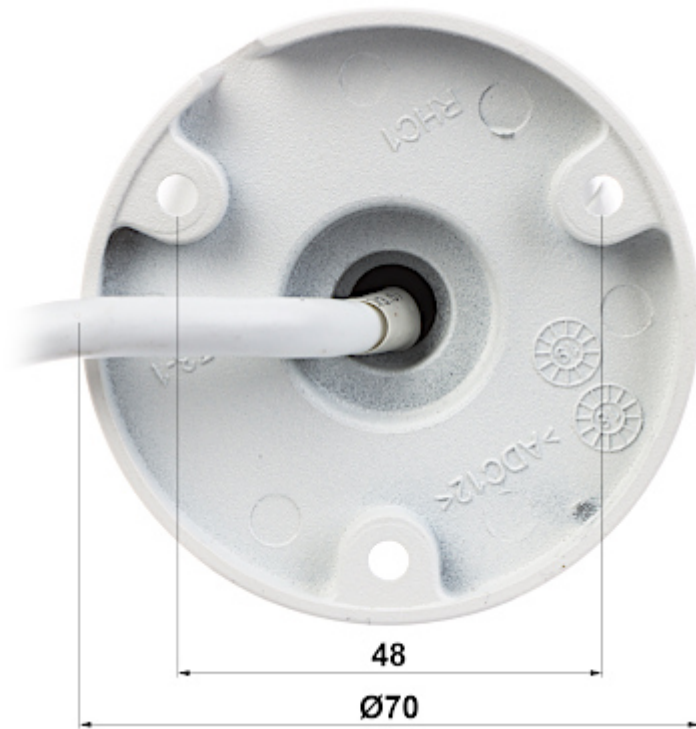

In the kit:



PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

