

Code: OPV-8/R10

VIDEO OVERVOLTAGE LIMITER OPV-8/R10

Net: 4.78 EUR Gross: 4.78 EUR

The OPV-8/R10 overvoltage limiter effectively protects signal line carrying away the stroke current to the ground, due to above provides adequate overvoltage protection for electronic devices. Our statistics collected from many years of service show that about 25 percent of damages of electronic equipment was caused by overvoltages.

The OPV-8/R10 does not affect signal quality and is a passive device, no supplying is required.

ATTENTION! Before installation please read the following instructions: Any installation work cannot be led during thunderstorm. The OPV-8/R10 requires good quality grounding installation. The limiter should be placed as near as possible to the protected device. The OPV-8/R10 is not symmetrical and the protected devices must be connected to the "PROTECTED DEVICE" BNC output sockets. The "LINE" input BNC sockets must be connected to the transmitting lines, which may surge.



SPECIFICATION

Standard:	• AHD - 5 Mpx • HD-CVI - 8 Mpx 4K UHD • HD-TVI - 5 Mpx • CVBS - PAL / NTSC
Threshold voltage:	> 2.4 V (wire/wire)
Maximum stroke current:	5 kA
Serial impedance per line:	1.1 Ω (Wire)
Capacity:	< 7 pF
Bandwidth:	0 ... 140 MHz
Insertion loss:	0.3 dB
Response time:	15 ns
Grounding:	Indirect, via inserted cable
Number of channels:	8
Input socket type:	BNC socket
Output socket type:	BNC socket
Housing:	Rack 10", 1U
Operation temp:	-20 °C ... 55 °C
Permissible relative humidity:	< 95 %
Weight:	0.24 kg
Dimensions:	256 x 44 x 33 mm
Manufacturer / Brand:	DELTA
Guarantee:	3 years


PRESENTATION

Front view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear view:

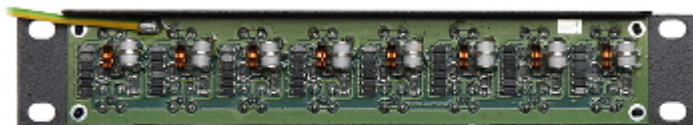

Top view:




Operation way:

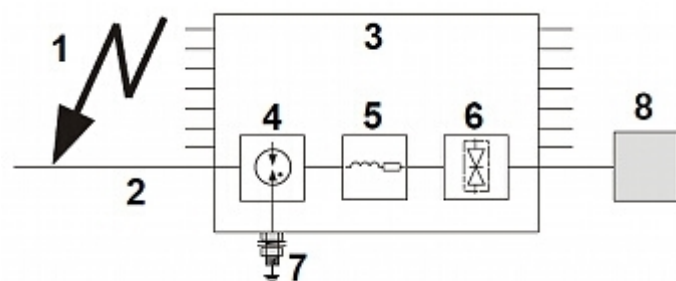


- 1) Overvoltage
- 2) Coaxial cable
- 3) overvoltage limiter
- 4) gas spark arrester
- 5) delayed system
- 6) protection diodes
- 7) Grounding
- 8) Protected devices

Connection diagram:

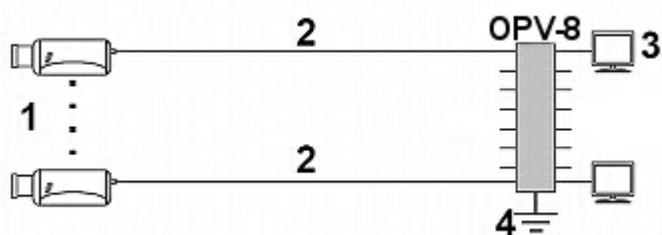

- 1) Cameras
- 2) Coaxial cable
- 3) Monitors
- 4) Grounding

In order to fully protect all equipment connected to video lines against overvoltages, this application is recommended:

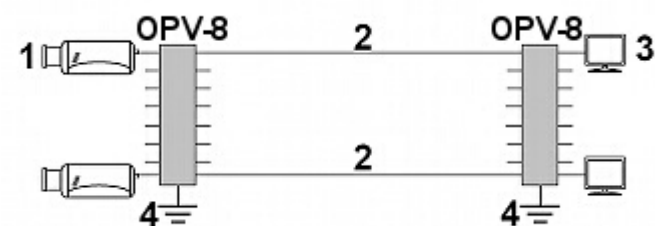

- 1) Cameras

- 2) Coaxial cable
- 3) Monitors
- 4) Grounding

OUR TESTS

Amplitude - frequency response (RF PWR OUT = 0 dBm):



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

