

Code: TC-C35WS SPEC:I5/E/Y/M/H/2.8MM/V4.1

IP CAMERA TC-C35WS SPEC:I5/E/Y/M/H/2.8MM/V4.1 - 5 Mpx 2.8 mm

TIANDY

Net: 287.84 EUR Gross: 287.84 EUR

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).



SPECIFICATION

Standard:	IP
Resolution:	2880 x 1620 - 5 Mpx , 2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p
Sensor:	1/2.7 " Progressive Scan CMOS
Lens:	2.8 mm
View angle:	104 °
Range of IR illumination:	50 m
Audio:	• Microphone built-in, • Audio input • Audio output • Bi-directional audio streaming support • Audio transmission via network • Compliance with the AAC standard
Memory card slot:	Micro SD card support up to 512GB
Image compression method:	S+265 / H.265 / H.264
Alarm inputs / outputs:	1 / 1
Main stream frame rate:	• 25 fps @ 5 Mpx • 50 fps @ 2 Mpx

Interface:	10/100 Base-TX (RJ-45)
WEB Server:	Built-in
Max. number of on-line users:	2
ONVIF:	✓
Mobile phones support:	Port no.: 3000 or access by a cloud (P2P) • Android: Free application EasyLive Plus • iOS (iPhone): Free application EasyLive Plus
Access from PC:	Port no.: 3000 or access by a cloud (P2P) - PC: Free application Easy7 Smart Client Express
Default IP address:	192.168.1.2
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 433, 3000, 3001, 3002, 23002
Mobile client access ports:	3000, 3001
PC client access ports:	3000, 3001
Port ONVIF:	80
Intelligent image analysis:	• classification of people and vehicles • crossing the line (tripwire) • double crossing the line • abandoned/missing object • illegal parking • people counting • detection of people gathering • heat map • detection of loitering in a given area • running • protective helmet detection • detection of persons on duty • video tampering
Main features:	• WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • ROI - improve the quality of selected parts of image • Corridor mode • NAS - Network Attached Storage support - allows to connect memory resources directly to the computer network • ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its • BLC/HLC - Back Light / High Light Compensation • ICR - Movable InfraRed filter • Day/night mode • Possibility to change the resolution, quality and bit rate
Power supply:	• PoE (802.3af), • 12 V DC / 670 mA
Power consumption:	≤ 8 W
Housing:	Compact - Metal
Color:	White
"Index of Protection":	IP67
Mechanical protection class:	—
Operation temp:	-40 °C ... 65 °C
Weight:	0.51 kg
Dimensions:	162 x 71 x 71 mm
Supported languages:	Polish, English, Albanian, Arabic, French, Hebrew, Spanish, Dutch, Korean, Portuguese, German, Russian, Thai, Turkish, Ukrainian, Italian, Vietnamese
Manufacturer / Brand:	TIANDY



Guarantee:

3 years

PRESENTATION



Side view:




Bottom view:



Memory card slot and "Reset" button:



Mounting side view:

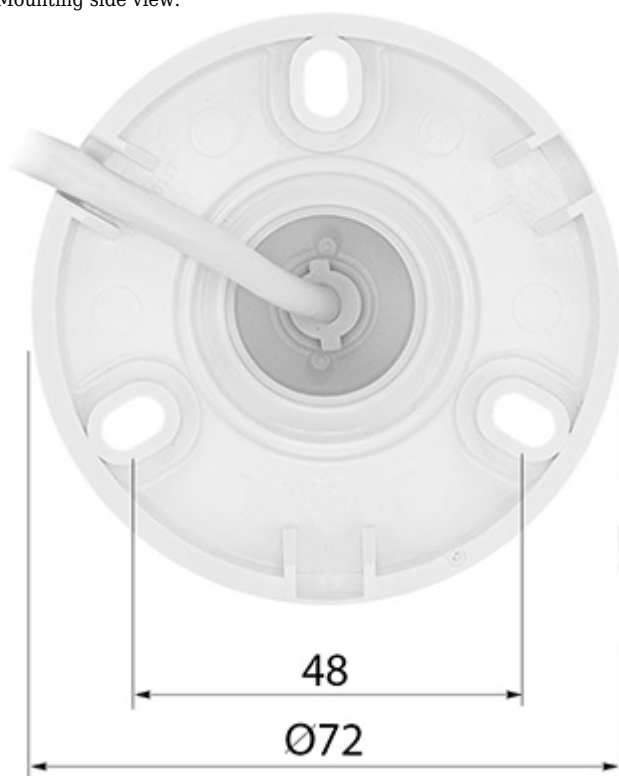

Connectors:



In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------