

Code: D-SEP2

VIDEO SEPARATOR **D-SEP2**

Net: **6.92 CHF** Gross: **6.92 CHF**

The D-SEP2 is designed for additional protection in CCTV installations, securing the cameras and other devices from voltage differences and strokes between devices in the installation.



SPECIFICATION

Standard:	CVBS - PAL / NTSC
Device type:	Passive
Number of inputs:	1 pcs BNC plug
Number of outputs:	1 pcs BNC plug
Input impedance:	75 Ω
Output impedance:	75 Ω
Opto-isolation between inputs and outputs:	600 V peak
Attenuation:	max. 3 dB
Insertion loss:	0.5 dB
Bandwidth:	10 MHz
Power supply:	—
Operation temp:	-20 °C ... 55 °C
Weight:	0.072 kg
Dimensions:	56 x 30 x 21 mm
Guarantee:	2 years


PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Amplitude - frequency response (RF PWR OUT = 0 dBm):

The oscillogram of the single line from analog camera. Input signal - yellow. After the signal passes through the device - blue:

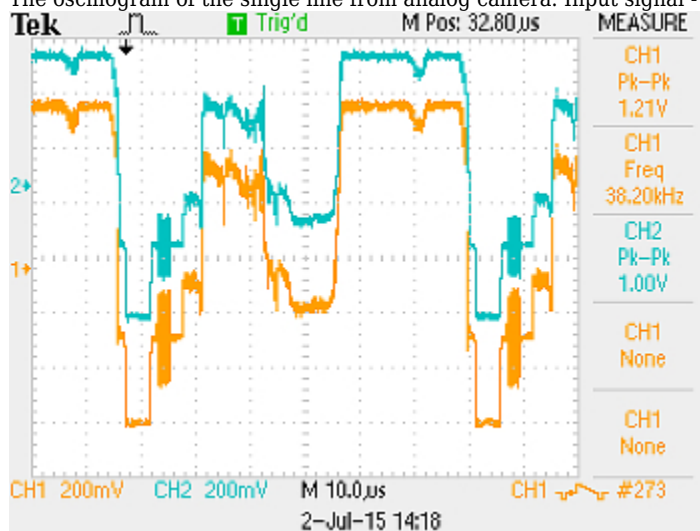

OUR OPINIONS



- The device is of limited use and only in some cases gives satisfactory results.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------