

Code: ASA4214F

## TIME & ATTENDANCE RECORDER **ASA4214F** DAHUA

Net: 7 334.61 NOK Gross: 7 334.61 NOK

The ASA4214F controller can operate autonomously or in the network mode. The device is also adapted to work with larger systems of access control and time & attendance recording via many popular communication interfaces. The device enables access control and time & attendance recording. The controller enables up to 4 methods of employee identification: face recognition, fingerprint, password and RFID reader in the 13.56 MHz S50 standard with the possibility of any combination of 2 or more of them.



### SPECIFICATION

Cards support:	13.56 MHz S50
Reading distance of prox-keys:	max. 5 cm
Shield:	4.3 " capacitive touch screen
Resolution:	480 x 272
Keyboard built-in:	—
Autonomous operation:	✓
Battery backup support:	—
Input lines:	1 x Reed switch , 1 x Door/gate opening button
Output lines:	1 x Electromagnetic lock
Alarm inputs:	2 pcs
Alarm outputs:	2 pcs
Identification time:	< 1 s
FAR (False Acceptance Rate):	< 0.00004 % @ Fingerprint < 0.001 % @ Face recognition
FRR (False Rejection Rate):	< 0.15 % @ Fingerprint < 1 % @ Face recognition
Communication:	<ul style="list-style-type: none"><li>• RS-232</li><li>• RS-485</li><li>• Wiegand</li><li>• LAN</li><li>• Wi-Fi - IEEE 802.11 b/g/n</li></ul>
Network interface:	10/100 Base-T
Default admin user / password:	admin / - The administrator password should be set at the first start
Power supply:	10 ... 15 V DC

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Main features:	<ul style="list-style-type: none"> <li>• 13.56 MHz S50 proximity reader built-in,</li> <li>• Fingerprint reader built-in</li> <li>• 2 cameras built-in : 2.0 Mpx working in the visible light range, 1.3 Mpx working in the near infrared light range</li> <li>• Memory of 3000 fingerprint patterns</li> <li>• Memory of 1000 face templates</li> <li>• Identification modes : PIN, Proximity identifier 13.56 MHz S50, Fingerprint, Face recognition, Any combination of the above,</li> <li>• Support for door contact and exit button</li> <li>• Indication of forced entry and the lack of closing doors</li> <li>• Anti-passback</li> <li>• 30000 indexed users</li> <li>• Weekly, or daily operation schedule</li> <li>• Holiday Schedules</li> <li>• History of 150000 events</li> <li>• Integration with an alarm system via in/out line</li> <li>• Port USB</li> <li>• Overload protection</li> <li>• Overvoltage protection</li> <li>• Tamper detection - opening the enclosure</li> </ul>
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)
Dimensions:	214 x 122 x 103 mm
Weight:	0.79 kg
Supported languages:	English
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

## PRESENTATION

Front panel:




Side view:




Rear view:



Connectors:

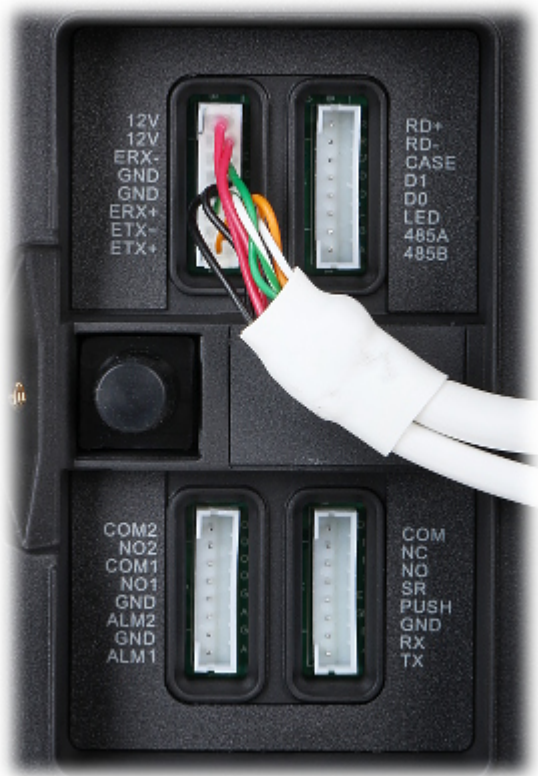

In the kit:

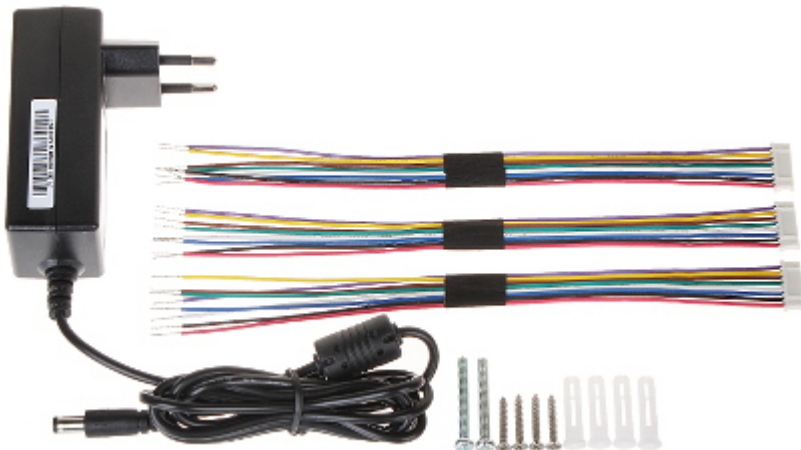

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------