

Code: PR311SE-G

ACCESS CONTROLLER **PR311SE-G** ROGER

Net: **113.72 EUR** Gross: **113.72 EUR**



Outdoor proximity cards and key-fobs reader with controller built-in. Unique 125 kHz standard.

SPECIFICATION

Cards support:	Unique EM 125kHz
Reading distance of prox-keys:	max. 15 cm
Keyboard built-in:	✓
Communication:	• RS-485 • RACS (Roger)
Selected features of the standalone mode:	• 1000 indexed users • History of 250 000 events • Operation with XM-2 I/O extension module (Full Standalone Mode)
Power supply:	10 ... 15 V DC
Average current consumption:	70 mA
Main features:	• The ability to add additional reader (bilateral way door control) • 3 programmable input lines NO/NC • 2 programmable transistor outputs 1A • One programmable relay output 1.5A/30V • Door modes (Normal, Locked, Unlocked and Conditionally Unlocked) • Any topology of communication bus • "Guest" type additional users support defined individually on each controller • Integration with an alarm system via in/out line • Identification modes (Card or PIN, Card and PIN, Card only, PIN only) • Fast programming (about 15 seconds for each controller in the system) • The ability to split the system into subsystems (max. 250 subsystems)
Operation temp:	-25 °C ... 40 °C
Permissible relative humidity:	10 ... 95 % (non-condensing)
Weight:	0.17 kg

Dimensions:	152.5 x 46 x 23 mm (Standard housing stand) 152.5 x 46 x 35 mm (Thicker housing stand)
Manufacturer / Brand:	ROGER
Guarantee:	3 years

PRESENTATION

Front panel:



Internal view of the housing:




Rear view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Dimensions:

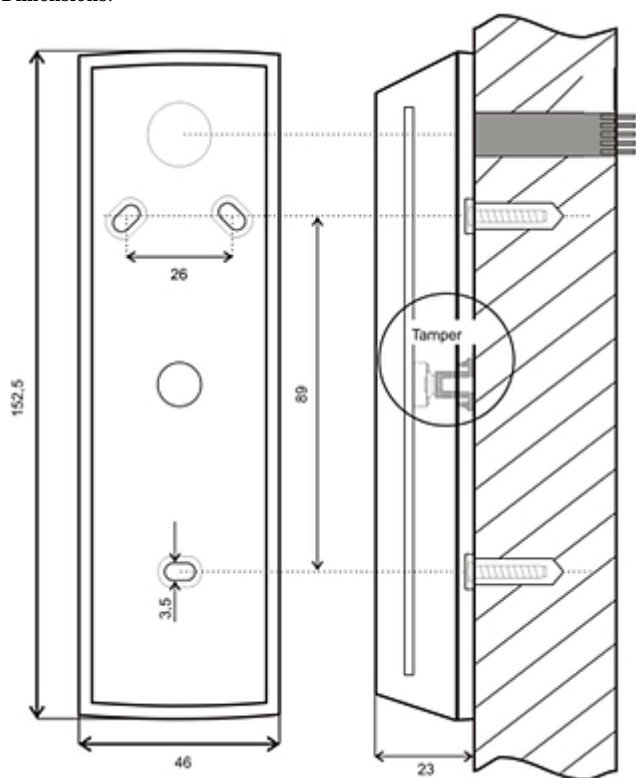

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------