

Code: ASC1204C-D

ACCESS CONTROLLER **ASC1204C-D** DAHUA

Net: **658.53 EUR** Gross: **658.53 EUR**

The ASC1204C-D controller is intended to use in access control systems based on electrical control of door opening.



SPECIFICATION


Number of served transitions:	4 (two-way)
Support:	DAHUA
Number of supported readers:	8 pcs
Battery backup support:	max. 7 Ah
Input lines:	20 pcs
Output lines:	12 pcs - Relay
Communication:	• RS-485, • Ethernet, • Wiegand 34/26
Power supply:	85 ... 264 V AC
Main features:	• Support for 4 doors (20 inputs: 4x lock state, 4x door sensor, 4x exit button, 8x alarm line) • 100000 indexed users • History of 150000 events • 128 General Purpose Schedules • Function to prevent of multiple use of the same code/card to gain access (anti-passback) • Door Left Open and Door Forced Open alarms • Tamper detection - opening the enclosure • Watchdog built-in • Remote programming from PC • Metal housing
Operation temp:	-30 °C ... 60 °C
Permissible relative humidity:	max. 95 % (non-condensing)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Weight:	2.63 kg
Dimensions:	280 x 320 x 115 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:

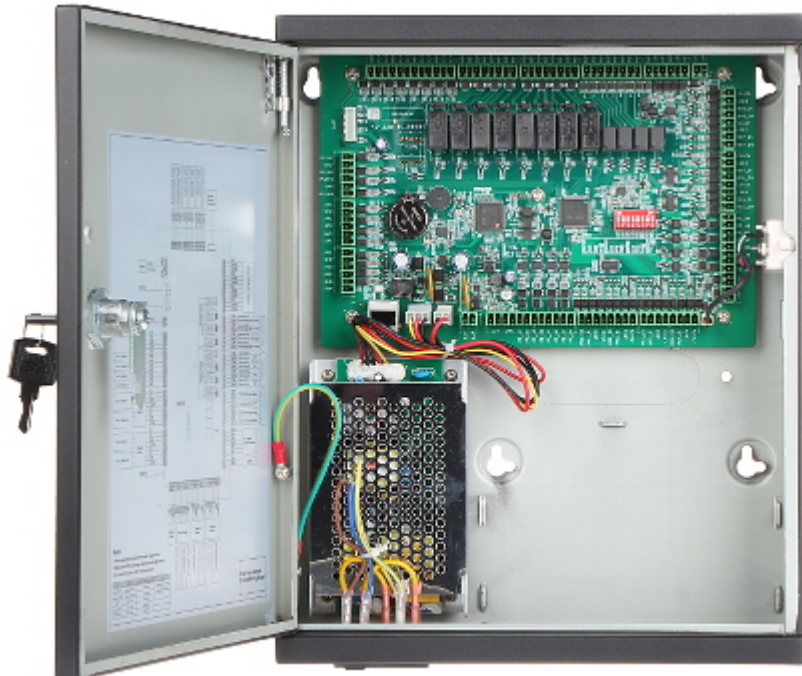

Internal view of the housing:

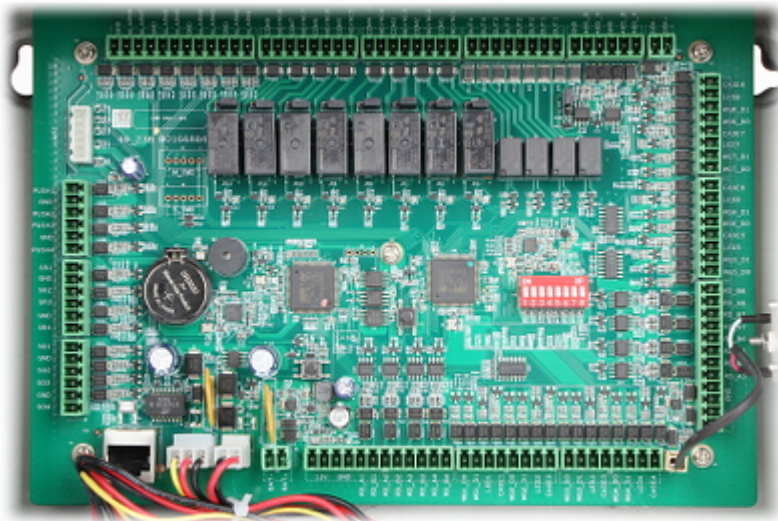

Bottom view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Side view:




Mounting side view:



Dimensions:

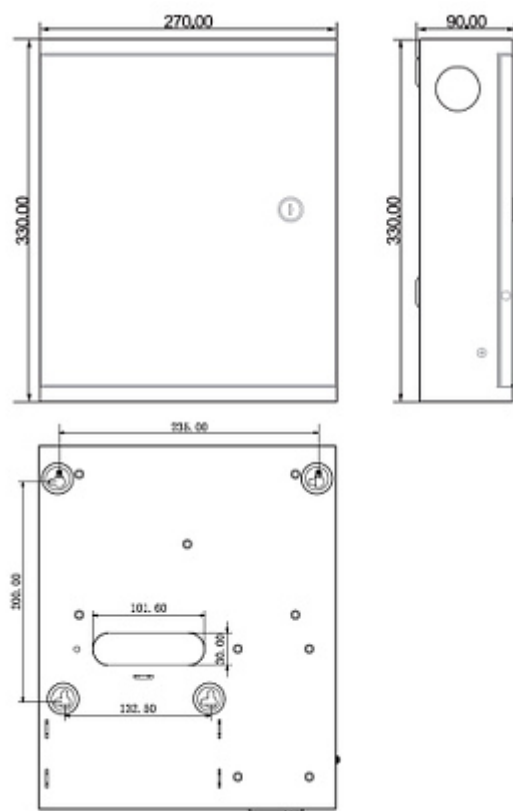

In the kit:

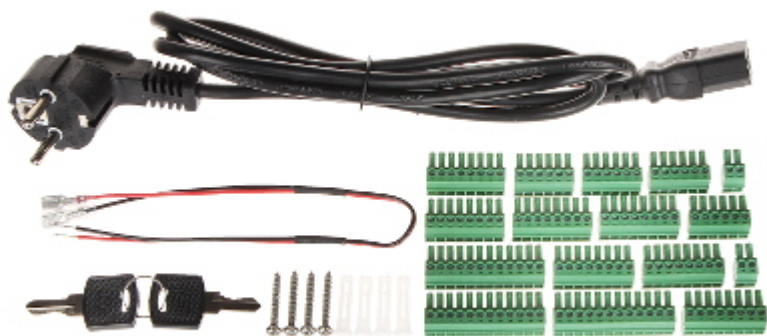

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

