


Code: MC16-PAC-10

ACCESS CONTROLLER MODULE **MC16-PAC-10** ROGER

Net: **11 569.01 SEK** Gross: **11 569.01 SEK**

The MC16-PAC-10 controller is a multifunctional electronic module, intended for use in the RACS 5 system, which enables the implementation of access control of the transition and building automation.

Attention! The pre-installed license includes functionality relating to control of the 10 transitions and building automation.

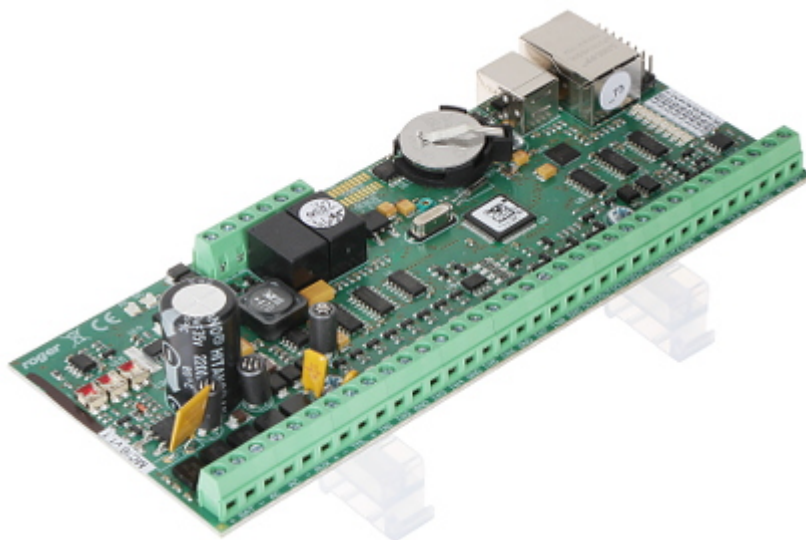


SPECIFICATION

Number of served transitions:	10
Inputs:	8
Outputs:	8
Number of users:	max. 8192 - Number of identifiers
Number of media per ID:	8 - Proximity card, PIN code, fingerprint, etc.
Number of permissions per ID:	32
Buffer memory:	8 000 000 events buffer
MCT readers support:	16 pcs
Readers connections:	4 pcs - Wiegand / PRT
Number of login points:	20
Number of access terminals:	40
Number of access zones:	20
Number of alarm zones:	20
Number of automation nodes:	20
Battery backup support:	13.8 V / 7 Ah
Communication:	• Ethernet 10BASE-T 10/100 Mb/s - RJ-45 socket • 2 x Port RS-485 • RACS (Roger)
Main features:	• Control of automation from the system terminals • Presentation of alarm supervision states on terminals • Controlling the supervision state of the alarm system zones • Hardware integration with alarm system and fire system • Multifunctional parametric inputs including Double Wiring • Weekly access schedules • Multi-year calendars of exceptions • Integrated support in VISO software


Power supply:	• 17 ... 18 V AC • 10 ... 15 V DC • 22 ... 26 V DC
Operation temp:	5 °C ... 40 °C
Permissible relative humidity:	≤ 95 % (non-condensing)
Weight:	0.15 kg
Dimensions:	175 x 72 x 30 mm
Manufacturer / Brand:	ROGER
Guarantee:	3 years


PRESENTATION

Top view:

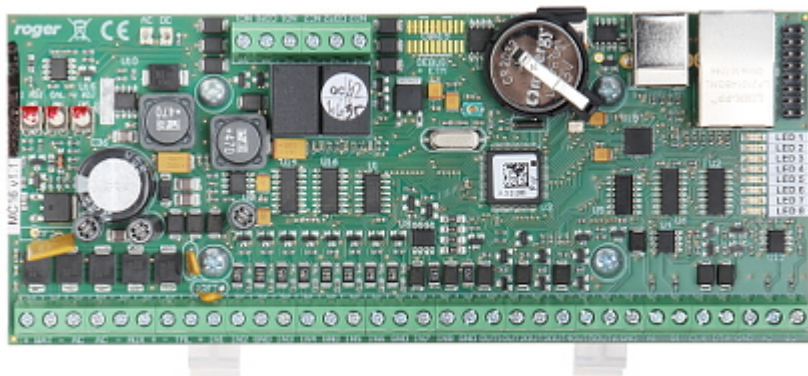


Connectors:

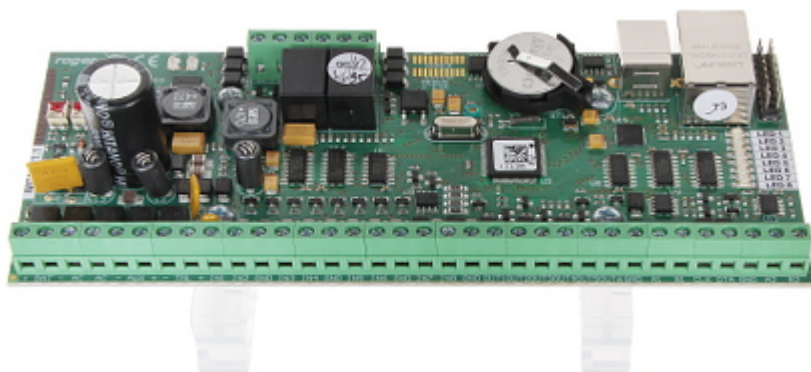


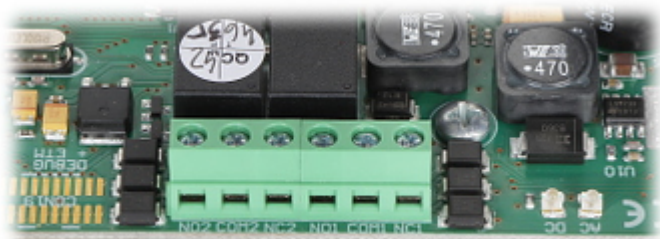

Mounting side view:

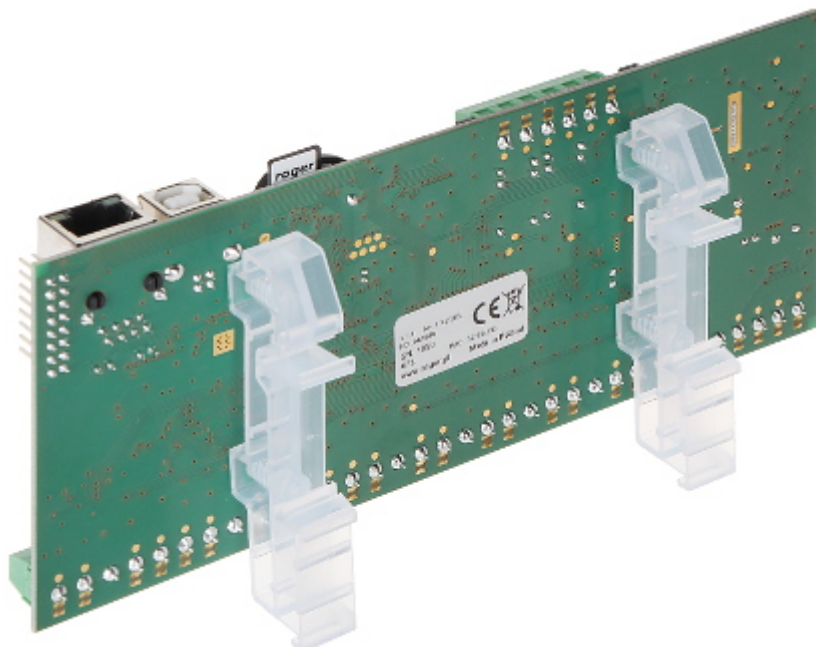

In the kit:

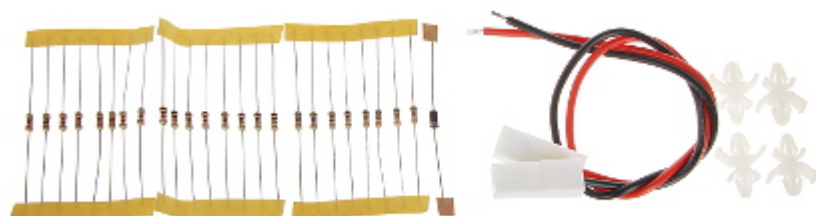

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------