

Code: ACCO-KP-PS


DOOR CONTROLLER **ACCO-KP-PS** SATEL

Net: 2 440.19 CZK Gross: 2 440.19 CZK

The ACCO-KP-PS controller is designed for control of a single door within the ACCO/ACCO NET access control systems. Users authorization is based on code or passive transponder (proximity card, tag, etc.). The device is provided with a relay output that can be used to operate electromagnetic lock or another door activating device. Owing to additional inputs and outputs, the module can work in conjunction with the alarm system.

The controller is equipped with a buffer switching power supply 12V DC/1.2A.

The ACCO-KP-PS controller can operate autonomously or in the network mode.

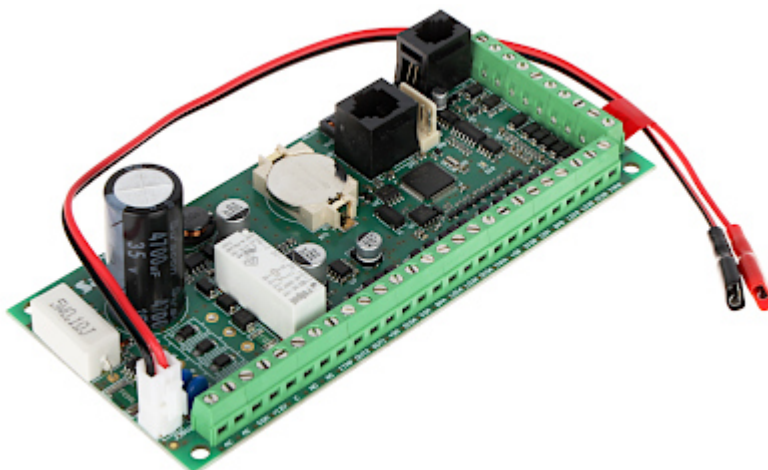

SPECIFICATION


Input lines:	5
Output lines:	2
Operation modes:	• Autonomous operation, • Work in the ACCO/ACCO NET system
Current-carrying capacity of OC output:	50 mA
Relay switching voltage:	250 V AC
Relay contacts load:	8 A
Communication:	RS-485, RS-232
Main features:	• Power adapter 12 V DC / 1.2 A • Support for single door with entry and exit authorization • 1024 users • Possibility to add different privileges to the users • Identification: Card and/or PIN • History of 24 576 events • Recording of information about Time&Attendance • 256 General Purpose Schedules • Holiday access schedules • Function to prevent of multiple use of the same code/card to gain access (anti-passback) • Limiting of accesses
Power supply:	18 V AC
Battery backup support:	12 V / 7 Ah
Permissible relative humidity:	95 %
Operation temp:	-10 °C ... 55 °C
Weight:	0.126 kg
Dimensions:	151 x 69 x 40 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Top view:

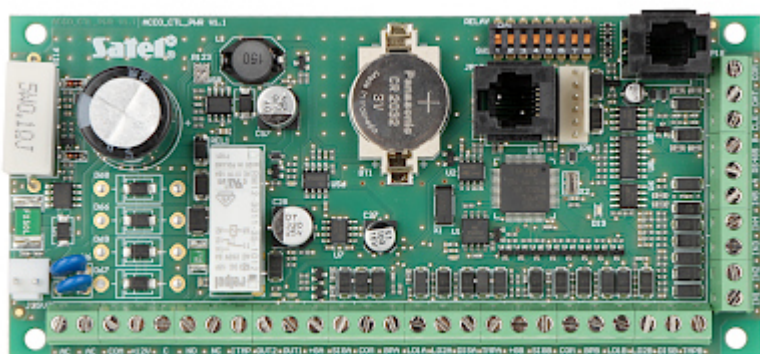

Connectors:

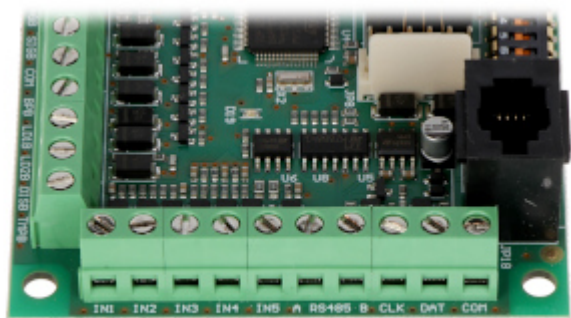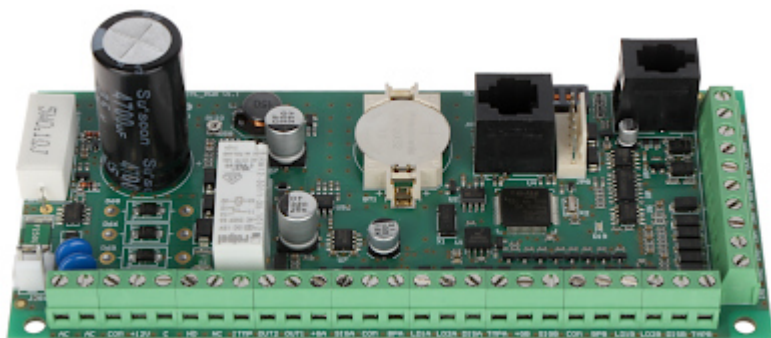

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------