


Code: POE-084824B

BUFFERED SWITCHING POWER SUPPLY ADAPTER **POE-084824B** PoE

Net: **78.80 EUR** Gross: **78.80 EUR**

The POE-084824B is designed to powering devices using PoE technology. This technology allows to run the system with only one UTP/FTP cable which transmits data and provides supplying voltage. Please pay attention for proper cooling conditions of the power adaptor during work!
Attention! The power cord is not included (230V AC).

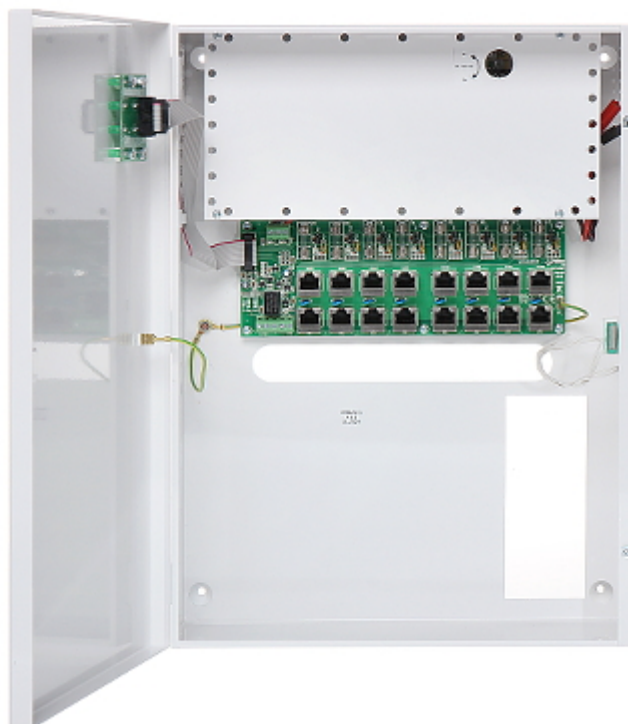

SPECIFICATION

Adapter type:	Switching
Number of inputs:	8 x RJ-45 socket
Number of outputs:	8 x RJ-45 socket
Output voltage:	44 V ... 54 V DC (buffer operation) 37 V ... 54 V DC (battery mode)
Input voltage:	88 V ... 264 V AC
Maximal output current:	8 x 0.4 A
Outputs protection:	8 x 0.5 A Glass Fuse / PTC Polymer Fuse
Protections:	<ul style="list-style-type: none">• Overload• Overvoltage• Overvoltage• Short-circuit• Tamper• Discharge
Main features:	<ul style="list-style-type: none">• Supported data rates : 10 / 100 Mbps• Max. battery dimensions 260 x 165 x 105 mm• Place for battery : 4x 12V/7Ah• FPS output - indicating power supply unit operation state: normal or failure• Battery charging current 0.2 A
LED indicators:	<ul style="list-style-type: none">• AC input voltage presence indication• DC output voltage presence indication (AUX)• Connecting to the device• Fuse has gone indication
Weight:	5.1 kg
Dimensions:	300 x 407 x 126 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Internal view of the housing:




Front view:




Mounting side view:



Dimensions:

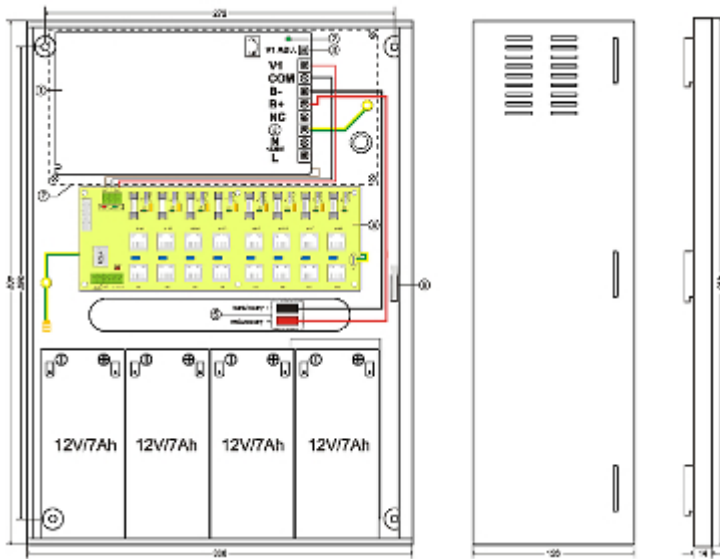

In the kit:

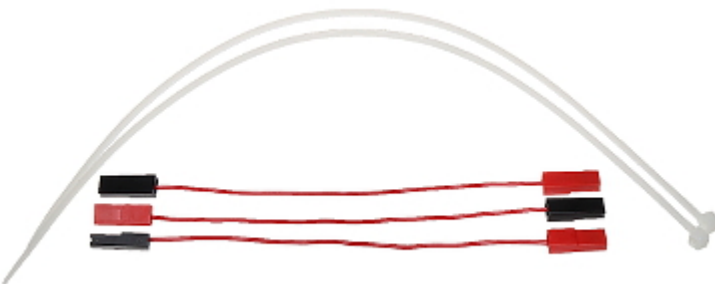

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------