

Code: PMT-48V150W1AA

## SWITCHING ADAPTER **PMT-48V150W1AA** Delta Electronics

Net: **45.96 EUR** Gross: **45.96 EUR**

Power adapter with two pairs of output terminals.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current.



### SPECIFICATION


|                                      |                                                                                                                        |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Adapter type:                        | Switching                                                                                                              |
| Power voltage:                       | selectable by switch <ul style="list-style-type: none"><li>• 90 V ... 132 V AC,</li><li>• 180 V ... 264 V AC</li></ul> |
| Output voltage:                      | 48 V DC                                                                                                                |
| Output voltage adjustment:           | 45.6 ... 52.8 V                                                                                                        |
| Maximal load:                        | 3.3 A                                                                                                                  |
| Output power:                        | 158.4 W                                                                                                                |
| Efficiency:                          | 89 %                                                                                                                   |
| MTBF (Mean Time Between Faults):     | > 700000 h - Telcordia SR-332                                                                                          |
| Number of outputs:                   | 2 pcs                                                                                                                  |
| Operation temp. / Relative humidity: | -10 °C ... 70 °C / 5 % ... 90 %                                                                                        |
| Weight:                              | 0.48 kg                                                                                                                |
| Dimensions:                          | 178 x 97 x 38 mm                                                                                                       |
| Manufacturer / Brand:                | Delta Electronics                                                                                                      |
| Guarantee:                           | <b>5 years</b>                                                                                                         |

### PRESENTATION

Adapter connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

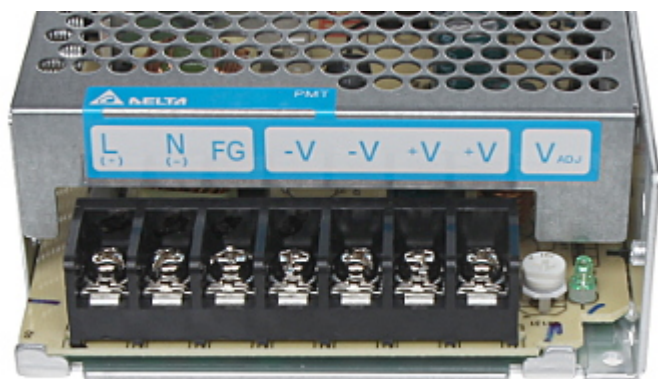

L - Live wire (230V)  
 N - Neutral wire  
 FG - Grounding  
 -V - DC "-" output  
 -V - DC "-" output  
 +V - DC "+" output  
 +V - DC "+" output  
 ADJ - Output voltage adjustment  
 Side view:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|