

Code: SD42215-HC-LA

# AHD, HD-CVI, HD-TVI, PAL SPEED DOME CAMERA OUTDOOR **SD42215-HC-LA** - 1080p 5 ... 75 mm DAHUA

Net: **614.03 EUR** Gross: **614.03 EUR**

The AHD / HD-CVI / HD-TVI interface allows to transmission of analog video signal via coaxial cable in 1080p resolution.

Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

The HD-CVI interface allows to transmission of analog, composite video signal via coaxial cable. During transmission there are no delays and is maintained the original, high quality image.

Camera is according to IP66 Index of Protection norm.



## SPECIFICATION

Standard:	AHD, HD-CVI, HD-TVI, PAL
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p 960 x 576 - 960H
Sensor:	1/2.8 " STARVIS™ CMOS
IR illuminator:	—
Lens:	5 ... 75 mm
View angle:	59 ° ... 5 °
Optical zoom:	x 15
Digital zoom:	x 16
Rotation speed depending on ZOOM level:	✓
Horizontal rotation range:	360 ° continuous
Vertical rotation range:	-2 ° ... 90 °
Rotation speed (manual control):	• 0.1 °/s ... 300 °/s (horizontal), • 0.1 °/s ... 200 °/s (vertical)
Preset rotation speed:	• 300 °/s (horizontal) • 200 °/s (vertical)
PTZ control:	Via interface RS-485

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Protocols:	Pelco-D, Pelco-P, DH-SD (auto detection)
Video output:	AHD / HD-CVI / HD-TVI / PAL, 1 Vpp 75 Ω
Audio:	<ul style="list-style-type: none"> <li>• External microphone input</li> <li>• Audio support via coaxial cable - HD-CVI only</li> </ul>
Number of presets:	300
Route settings:	8
Horizontal scan:	✓
Park action:	—
Alarm inputs / outputs:	2 / 1
Main features:	<ul style="list-style-type: none"> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 2D-DNR, 3D-DNR - Digital Noise Reduction</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• EIS - Electronic Image Stabilization</li> <li>• F-DNR (Defog) - Reduction of image noise caused by precipitation</li> <li>• D-ZOOM - Digital Zoom</li> <li>• Image rotation and mirror</li> <li>• ICR - Movable InfraRed filter</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• Auto White Balance</li> <li>• 24 Configurable Privacy Zones</li> <li>• AGC - Automatic Gain Control</li> </ul>
OSD menu:	✓
Power supply:	12 V DC (power adapter included)
Power consumption:	<ul style="list-style-type: none"> <li>• ≤ 9,6 W (typical)</li> <li>• ≤ 12 W (max)</li> </ul>
Housing:	Speed Dome, Metal
Color:	White
"Index of Protection":	IP66
Mechanical protection class:	IK10
Operation temp:	-30 °C ... 60 °C
Weight:	1.8 kg
Dimensions:	Ø 170 x 155 mm
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>

## PRESENTATION


Camera view after remove the dome (configuration jumpers are visible):





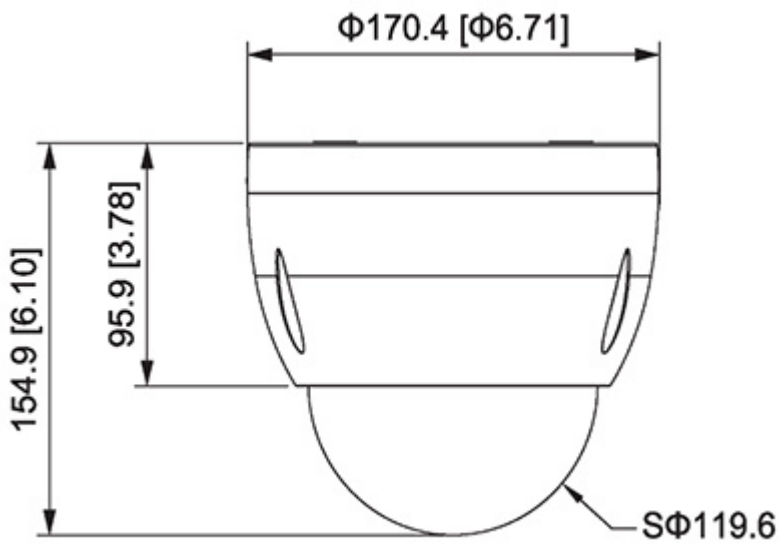

Camera connectors:

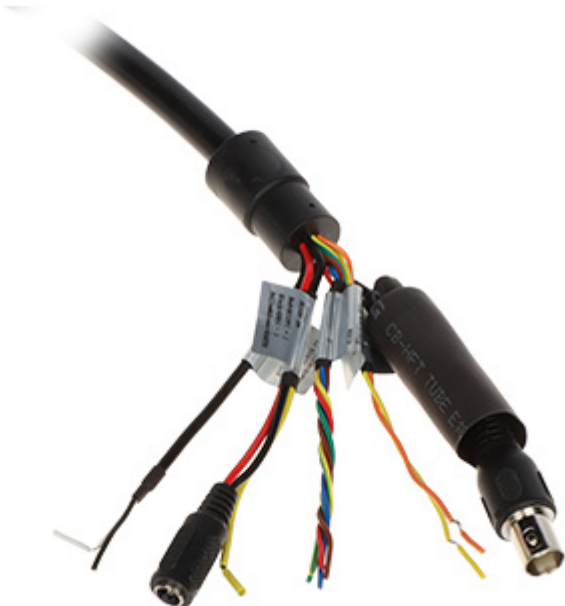

Connectors description:



In the kit:



## OUR OPINIONS



- Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

