

Code: ETI-D01/16A

## FUSE LINK **ETI-D01/16A** 16 A 400 V gL/gG E14 ETI

Net: **4.62 PLN** Gross: **4.62 PLN**

Fuse-links are used as the most reliable protection of electrical installation against overload and short-circuit currents. All fuse-links have blown-fuse indicators which are visible through the screw cap when mounted.



### SPECIFICATION


|                         |                                                                                                                                                                                                                                                                                                                                   |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated current:          | 16 A                                                                                                                                                                                                                                                                                                                              |
| Rated voltage:          | 250 V DC, 400 V AC                                                                                                                                                                                                                                                                                                                |
| Fusing characteristics: | gL/gG                                                                                                                                                                                                                                                                                                                             |
| Fuse base:              | E14                                                                                                                                                                                                                                                                                                                               |
| Type:                   | D0                                                                                                                                                                                                                                                                                                                                |
| Size:                   | D01                                                                                                                                                                                                                                                                                                                               |
| Breaking capacity:      | 50 kA AC, 8 kA DC                                                                                                                                                                                                                                                                                                                 |
| Main features:          | <ul style="list-style-type: none"><li>• Low power and energy losses</li><li>• Small temperature increase</li><li>• High ability to limit short-circuit current</li><li>• Stability of current-time characteristics and full selectivity of operation</li><li>• Selective cooperation with over-current circuit breakers</li></ul> |
| Housing:                | Ceramic                                                                                                                                                                                                                                                                                                                           |
| Weight:                 | 0.0066 kg                                                                                                                                                                                                                                                                                                                         |
| Dimensions:             | Ø 11 x 36 mm<br>Ø 9.7 mm (A)                                                                                                                                                                                                                                                                                                      |
| Manufacturer / Brand:   | ETI                                                                                                                                                                                                                                                                                                                               |
| Guarantee:              | 2 years                                                                                                                                                                                                                                                                                                                           |

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60




Dimensions:

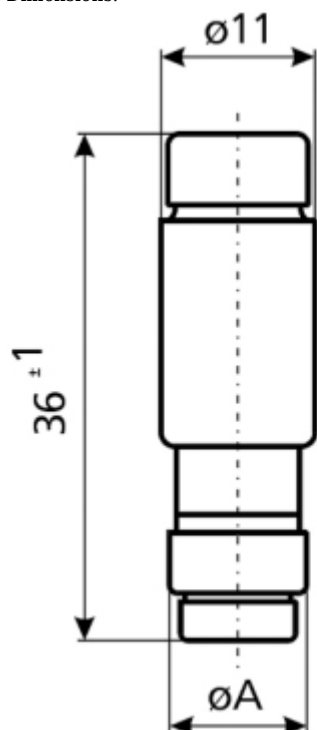

| $I_n$<br>[A] | $\phi A$ |
|--------------|----------|
| 2            | 7,3      |
| 4            | 7,3      |
| 6            | 7,3      |
| 10           | 8,5      |
| 13           | 8,5      |
| 16           | 9,7      |

Time-current characteristics:

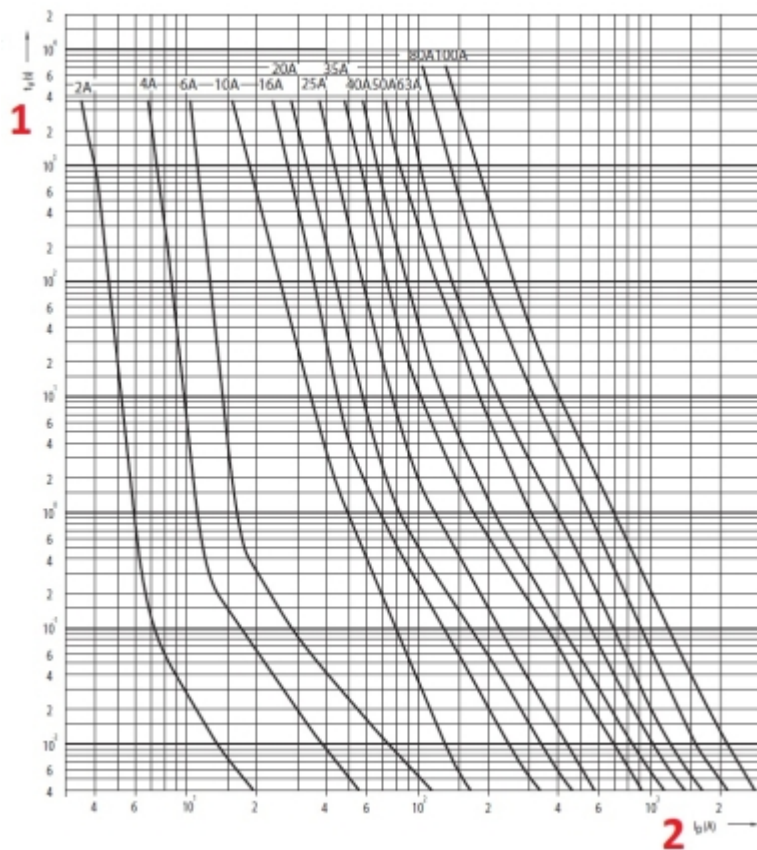

1. Prearcing time (s)
2. Prospective current (A)

#### PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60