

Code: ETI-D3/40A

FUSE LINK **ETI-D3/40A** 40 A 500 V gG E33 ETI

Net: **1.52 EUR** Gross: **1.52 EUR**

Fuse-links are used as the most reliable protection of electrical installation against overload and short-circuit currents. All fuse-links have blown-fuse indicators which are visible through the screw cap when mounted.



SPECIFICATION


Rated current:	40 A
Rated voltage:	250 V DC, 500 V AC
Fusing characteristics:	gG
Fuse base:	E33
Type:	D
Size:	D3
Breaking capacity:	50 kA AC, 8 kA DC
Main features:	<ul style="list-style-type: none">• Low power and energy losses• Small temperature increase• High ability to limit short-circuit current• Stability of current-time characteristics and full selectivity of operation• Selective cooperation with over-current circuit breakers
Housing:	Ceramic
Weight:	0.048 kg
Dimensions:	Ø 27 x 50 mm
Manufacturer / Brand:	ETI
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Dimensions:

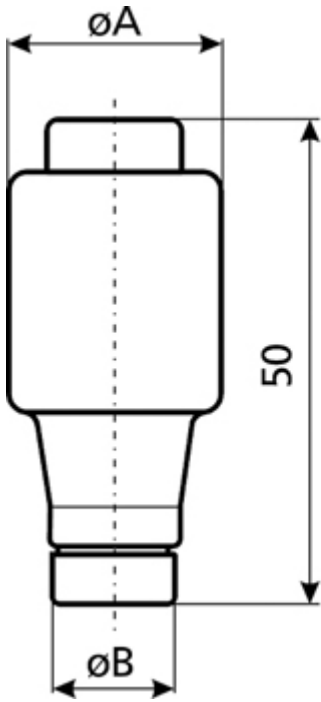

[A]	$\varnothing A$	$\varnothing B$
32	27	16
35	27	16
40	27	16
50	27	18
63	27	20

Time-current characteristics:

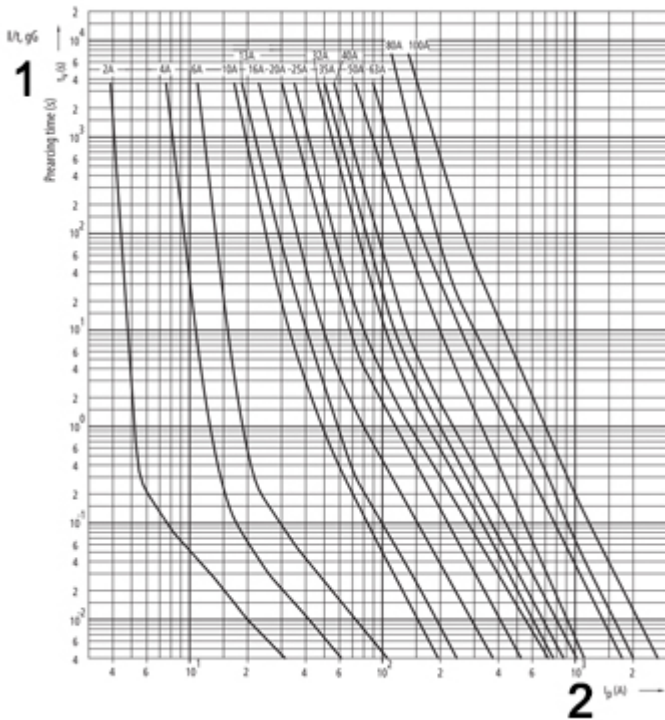

1. Prearcing time (s)
2. Prospective current (A)

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60