

Code: KTD02(S)

VIDEO DOORPHONE KIT **KTD02(S)** DAHUA

Net: **550.25 CHF** Gross: **550.25 CHF**

2-wire IP video doorphone kit with a 7-inch touch screen monitor, the possibility of alarm integration and a remote intercom from the mobile application. It can be also used as simple alarm control panel, or notification module by the support 6 alarm inputs. Video Doorphone is mounted in a surface-mounted housing.

The set includes: VTH2622GW-W indoor panel, VTO2202F-L video doorphone, VTM115 surface-mounted housing and 48V/1.25A switching adapter.

ATTENTION! The device does not support the Dahua analogue system.



SPECIFICATION

Sensor:	2 Mpx CMOS
Lens:	1.9 mm
View angle:	169 °
proximity reader built-in:	—
Image compression method:	H.265, H.264
LED illuminator:	—
IR illuminator:	✓
Compatibility:	DAHUA
RS-485:	✓
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Main features:	<ul style="list-style-type: none">• Micro SD memory cards up to 64GB support (possible local recording),• Doorbell button,• LED diodes,• Door status detection,• Access control function with 2 locks support,• WDR - 120 dB - Wide Dynamic Range,• 3D-DNR - Digital Noise Reduction,• Day/night mode,• Bidirectional communication,• Microphone built-in,• Speakers built-in,• Echo suppression and reduction / digital noise reduction,• Tamper detection - removing from mounting surface,• SOS support,• Power output 12 V DC / 100 mA
Power supply:	<ul style="list-style-type: none">• 2-Wire interface• 48 V / 1.25 A
Power consumption:	≤ 6 W

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Housing:	Aluminum
Color:	Silver
"Index of Protection":	IP65
IK rating:	IK07
Operation temp:	-30 °C ... 60 °C
Weight:	0.33 kg
Dimensions:	130 x 96 x 40.5 mm

INDOOR PANEL:

Shield:	7 " capacitive touch screen
Resolution:	1024 x 600
Internal memory:	—
Memory card slot:	✓
Main features:	<ul style="list-style-type: none"> • Wi-Fi Module - 2.4 GHz IEEE 802.11 b/g/n, • Protections : WPA/WPA2, WPA-PSK/WPA2-PSK, • IP Dahua cameras support, • SOS support, • Microphone built-in, • Speakers built-in, • Bidirectional communication, • Echo suppression and reduction / digital noise reduction, • Smooth adjustment of monitor parameters: image brightness, ring tone volume and conversation volume, • Receive and view the published information from the management center, • DND mode
Controlling:	capacitive touch screen
Alarm inputs:	6 (1 - as a bell)
Alarm outputs:	1
Power supply:	<ul style="list-style-type: none"> • 2-Wire interface • 48 V / 1.25 A
Power consumption:	<ul style="list-style-type: none"> ≤ 6 W (operation) ≤ 2 W (standby)
Operation temp:	-10 °C ... 55 °C
Housing:	Plastic (PC + ABS)
Color:	White
Weight:	0.34 kg
Dimensions:	190 x 135 x 26 mm

ENCLOSURE:

Material:	Aluminum
Color:	Silver
Weight:	0.17 kg
Internal dimensions:	120 x 88 x 24 mm
External dimensions:	129 x 95 x 29 mm

POWER SUPPLY ADAPTER:

Input voltage:	100 ... 240 V AC
AC input frequency:	50 / 60 Hz
Output voltage:	48.0 V DC
Output current:	1.25 A



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Output power:	60.0 W
Connector:	2.1/5.5 mm plug on the cable
LED indicators:	—
Housing:	Plastic
Weight:	0.25 kg
Dimensions:	125 x 47 x 32 mm

General information:

Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

INDOOR PANEL:




Rear view:





Connectors view:

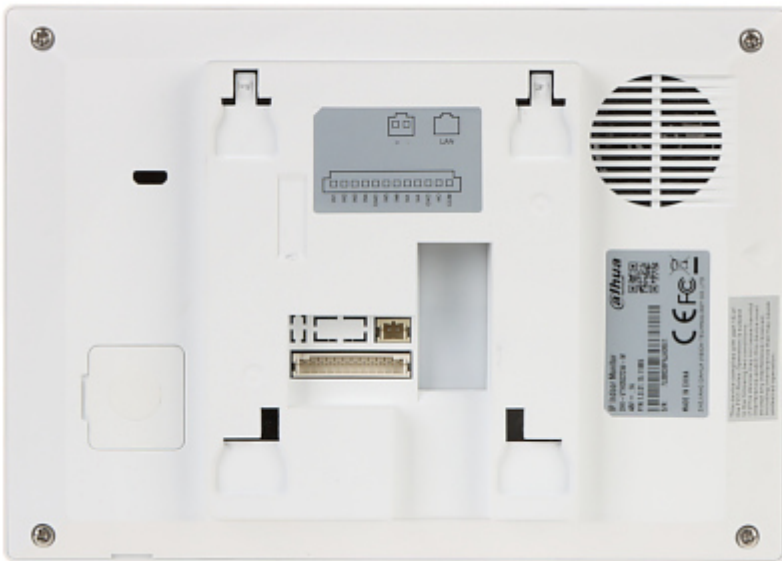

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


VIDEO DOORPHONE:



Rear view:



Connectors view:

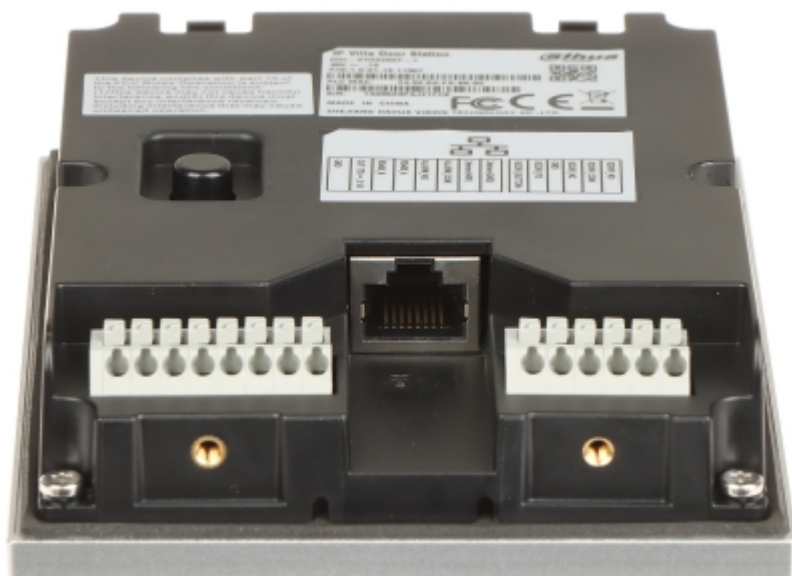


Memory card slot:



ENCLOSURE:




Front view:

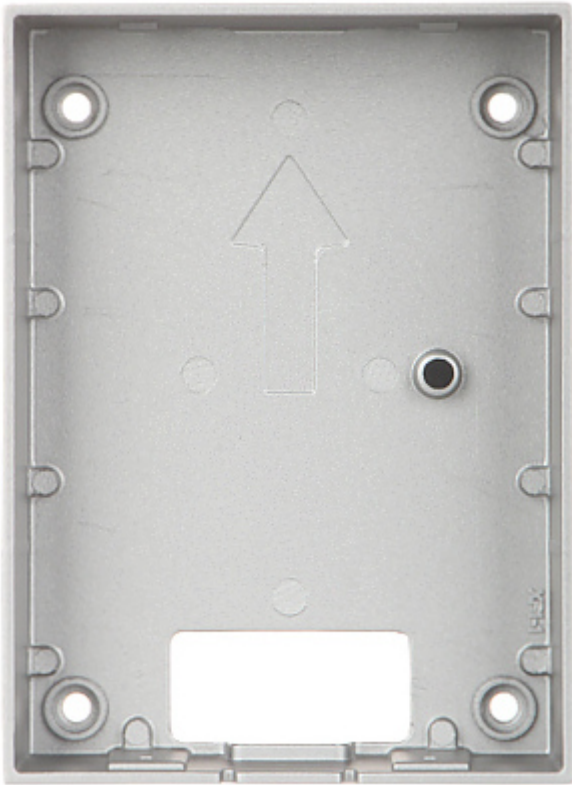

Rear view:



In the kit:

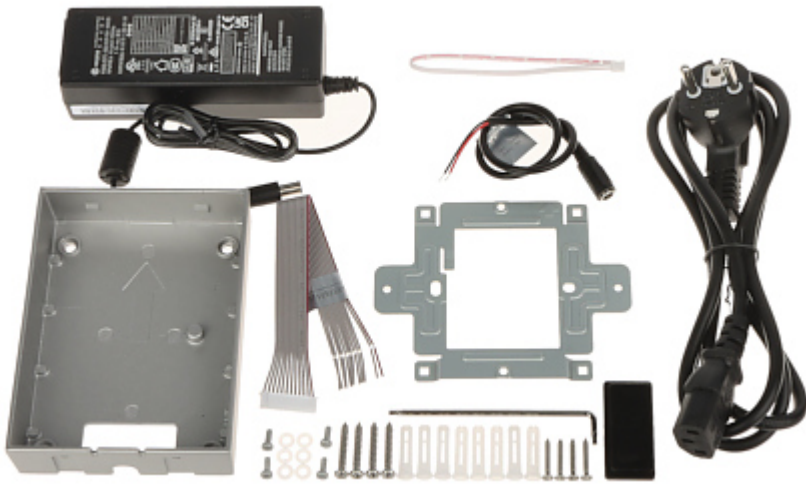

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

