

Code: KN-CA55L

GATE MAGNETIC DETECTOR **KN-CA55L**

Net: **9.05 EUR** Gross: **9.05 EUR**

The magnetic contacts can be used wherever required for controlling the status of doors, windows and/or other movable elements, e.g. for protection or monitoring of access to particular sites, spaces, facilities, in automatic control systems, etc.

The contact is designed for surface mounting.



SPECIFICATION



Detection:	Opening the door or window
Maximum reed switched voltage:	20 V
Maximal switched current:	10 mA
Make distance:	55 mm
Break distance:	70 mm
Main features:	• Rugged, metal sealed body • NC output - a magnet close to a reed switch - does not trigger an alarm, the contacts are closed • Length of the cables : 40 cm • The cables are protected with a metal spiral tube with a length of 36.5 cm • Included bracket for attaching the magnet
Color:	Silver
Weight:	0.16 kg (total)
Dimensions:	105 x 37.5 x 9.5 mm - Reed switch 106 x 15.5 x 15.2 mm - Magnet
Guarantee:	2 years

PRESENTATION


Dimensions:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

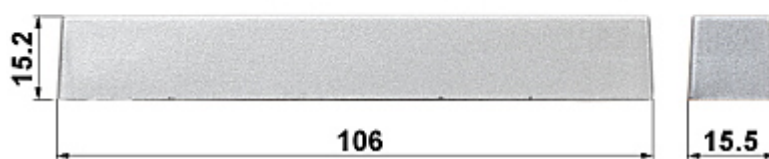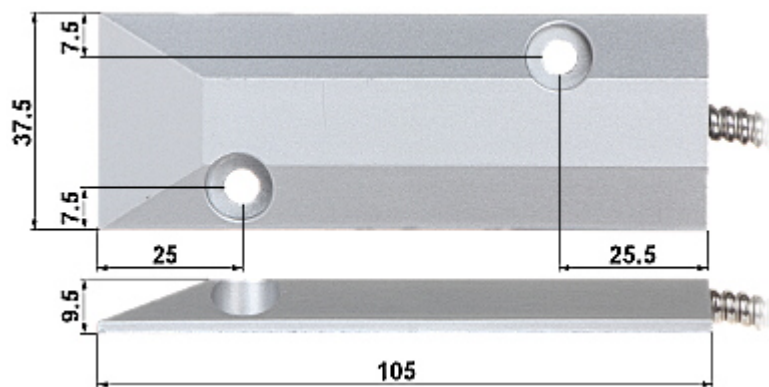

Bracket dimensions:

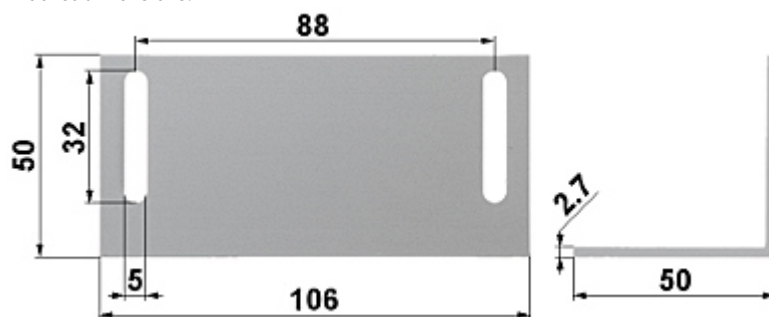

In the kit:





PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

