

Code: DS-2DE3A400BW-DE/W(F1)(T5)

## IP SPEED DOME CAMERA OUTDOOR **DS-2DE3A400BW-DE/W(F1)(T5)**

ACUSENSE - 4 Mpx 4 mm Hikvision

Net: **436.26 EUR** Gross: **436.26 EUR**

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.

For a few models of IP cameras working at  $\geq 1920 \times 1080$  resolution we recommend to use of network with 1Gb/s bandwidth.

Camera from AcuSense series.



### SPECIFICATION

|                                    |                                                                                           |
|------------------------------------|-------------------------------------------------------------------------------------------|
| Standard:                          | IP                                                                                        |
| Resolution:                        | 2560 x 1440 - 4 Mpx ,<br>1920 x 1080 - 1080p<br>1280 x 960 - 1.3 Mpx<br>1280 x 720 - 720p |
| Sensor:                            | 1/1.8 " Progressive Scan CMOS                                                             |
| Lens:                              | 4 mm                                                                                      |
| View angle:                        | 89 °                                                                                      |
| Optical zoom:                      | —                                                                                         |
| Digital zoom:                      | x 16                                                                                      |
| Range of IR illumination:          | —                                                                                         |
| White light LED illuminator range: | 30 m                                                                                      |
| S/N ratio:                         | > 52 dB                                                                                   |
| Preset rotation speed:             | 60 °/s (horizontal)<br>50 °/s (vertical)                                                  |
| Rotation speed (manual control):   | 0.1 °/s ... 60 °/s (horizontal)<br>0.1 °/s ... 50 °/s (vertical)                          |
| Horizontal rotation range:         | 350 ° - Rotation of the head is limited by stops                                          |
| Vertical rotation range:           | 0 ° ... 90 °                                                                              |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RS-485 interface:              | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Number of presets:             | 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Memory card slot:              | Micro SD card support up to 512GB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Image compression method:      | H.265+ / H.265 / H.264+ / H.264 / MJPEG                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Alarm inputs / outputs:        | 1 / 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Audio:                         | <ul style="list-style-type: none"> <li>• Microphone built-in</li> <li>• External microphone input,</li> <li>• Audio output</li> <li>• Speaker built-in</li> <li>• Bi-directional audio streaming support</li> <li>• Audio detection</li> <li>• Noise reduction</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Main stream frame rate:        | 25 fps @ 4 Mpx                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Network interface:             | <ul style="list-style-type: none"> <li>• Wi-Fi - IEEE 802.11 b/g/n</li> <li>• 10/100 Base-TX (RJ-45)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| WEB Server:                    | Built-in, NVR compliance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Max. number of on-line users:  | 20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Intelligent image analysis:    | <ul style="list-style-type: none"> <li>• crossing the line (tripwire)</li> <li>• intrusion</li> <li>• detection of entry into the area / exit from the area</li> <li>• classification of people and vehicles</li> <li>• abandoned/missing object</li> <li>• face detection</li> <li>• advanced face capture features</li> <li>• detection of up to 5 faces simultaneously</li> </ul>                                                                                                                                                                                                                                                                                                                                                                   |
| Main features:                 | <ul style="list-style-type: none"> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 3D-DNR - Digital Noise Reduction</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• F-DNR (Defog) - Reduction of image noise caused by precipitation</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• Intelligent 3D Positioning System</li> <li>• Configurable Privacy Zones - 24</li> <li>• Motion Detection</li> <li>• AGC - Automatic Gain Control</li> <li>• Auto White Balance</li> <li>• Parking action - this function enables to locate the camera to specific position automatically if operator doesn't operate the controller for some time</li> <li>• NAS - Network Attached Storage support</li> </ul> |
| ONVIF:                         | ✓                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Mobile phones support:         | Port no.: 8000 or access by a cloud (P2P)<br><ul style="list-style-type: none"> <li>• Android: Free application <a href="#">Hik-Connect</a></li> <li>• iOS: Free application <a href="#">Hik-Connect</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Default admin user / password: | admin / -<br>The administrator password should be set at the first start                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Default IP address:            | 192.168.1.64                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Web browser access ports:      | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| PC client access ports:        | Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Mobile client access ports:    | 8000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Port ONVIF:                    | 80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| RTSP URL:                      | <ul style="list-style-type: none"> <li>• Main stream :<br/>rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/</li> <li>• Sub stream :<br/>rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Power supply:                  | <ul style="list-style-type: none"> <li>• PoE (802.3at),</li> <li>• 12 V DC / 3.33 A (power adapter included)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Power consumption:             | ≤ 14 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



|                        |                     |
|------------------------|---------------------|
| Housing:               | Speed Dome, Plastic |
| Color:                 | White + Black       |
| Operation temp:        | -30 °C ... 65 °C    |
| "Index of Protection": | IP66                |
| Weight:                | 1.017 kg            |
| Dimensions:            | 179 x 120 x 182 mm  |
| Supported languages:   | Polish, English     |
| Manufacturer / Brand:  | Hikvision           |
| SAP Code:              | 327000672           |
| Guarantee:             | <b>3 years</b>      |

## PRESENTATION


Bottom view:



Memory card slot and "Reset" button:



Camera connectors:

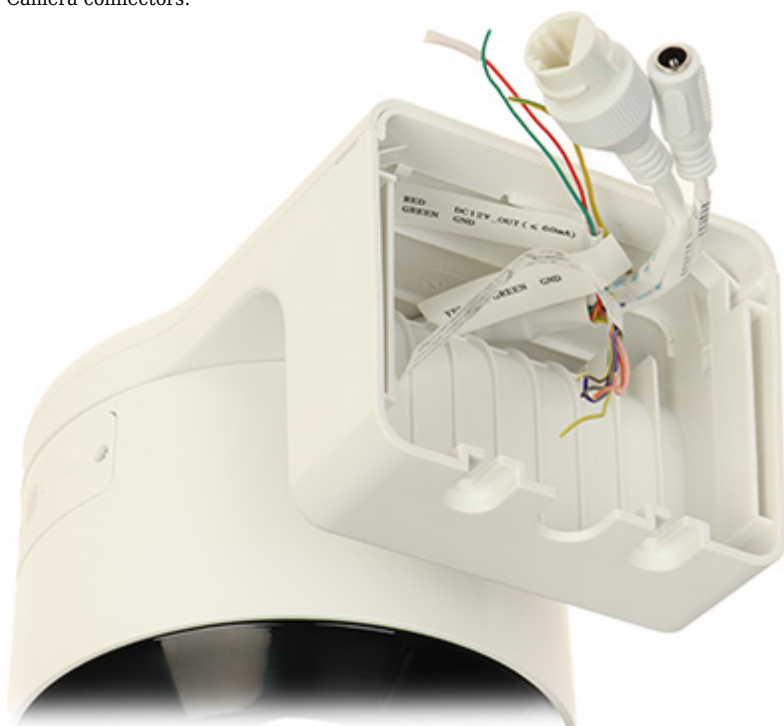


Connectors description:



Camera dimensions:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

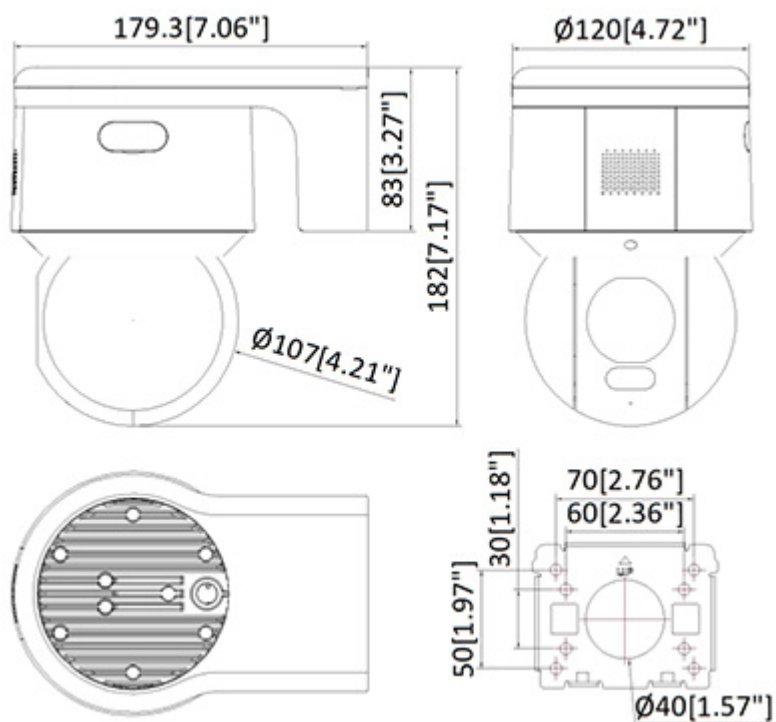

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|