

Code: DHI-VTO1220BW

## VIDEO DOORPHONE **DHI-VTO1220BW** DAHUA

Net: 4 651.42 NOK Gross: 4 651.42 NOK



Video Doorphone is mounted in a flush-mounted housing.  
ATTENTION! The device does not support the Dahua analogue system.

### SPECIFICATION

|                           |                                                                                                                                                                                                                                                                                                                    |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sensor:                   | 1/3 ", 1.3 Mpx CMOS                                                                                                                                                                                                                                                                                                |
| Lens:                     | 3.6 mm                                                                                                                                                                                                                                                                                                             |
| View angle:               | 95 °                                                                                                                                                                                                                                                                                                               |
| Display:                  | 3.5 " TFT LCD, 320 x 240 px                                                                                                                                                                                                                                                                                        |
| Image compression method: | H.264                                                                                                                                                                                                                                                                                                              |
| LED illuminator:          | ✓                                                                                                                                                                                                                                                                                                                  |
| Compatibility:            | DAHUA IP Protocol                                                                                                                                                                                                                                                                                                  |
| RS-485:                   | ✓                                                                                                                                                                                                                                                                                                                  |
| UTP category:             | UTP cat. 5e                                                                                                                                                                                                                                                                                                        |
| Main features:            | <ul style="list-style-type: none"><li>• proximity reader built-in - 13.56 MHz S50,</li><li>• Touch control keys,</li><li>• LCD display,</li><li>• Bidirectional communication,</li><li>• Microphone built-in,</li><li>• Speakers built-in,</li><li>• Tamper detection - removing from mounting surface ,</li></ul> |
| Operation temp:           | -40 °C ... 60 °C                                                                                                                                                                                                                                                                                                   |
| Power supply:             | 12 V DC / 0.83 A                                                                                                                                                                                                                                                                                                   |
| Power consumption:        | ≤ 10 W                                                                                                                                                                                                                                                                                                             |
| Housing:                  | Tempered glass                                                                                                                                                                                                                                                                                                     |
| Color:                    | White                                                                                                                                                                                                                                                                                                              |

|                        |                                                                          |
|------------------------|--------------------------------------------------------------------------|
| "Index of Protection": | IP65                                                                     |
| Weight:                | 1.09 kg                                                                  |
| Dimensions:            | 408 x 150 x 77 mm                                                        |
| Supported languages:   | English, Bulgarian, Czech, Finnish, Polish, Slovenian, Slovak, Hungarian |
| Manufacturer / Brand:  | DAHUA                                                                    |
| Guarantee:             | <b>3 years</b>                                                           |

## PRESENTATION

Front view:




Rear view:






Connectors:

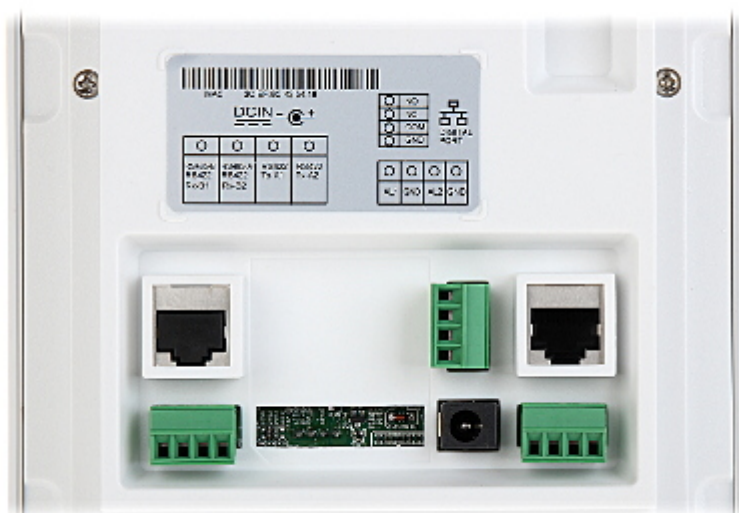

Examples of connection diagrams:

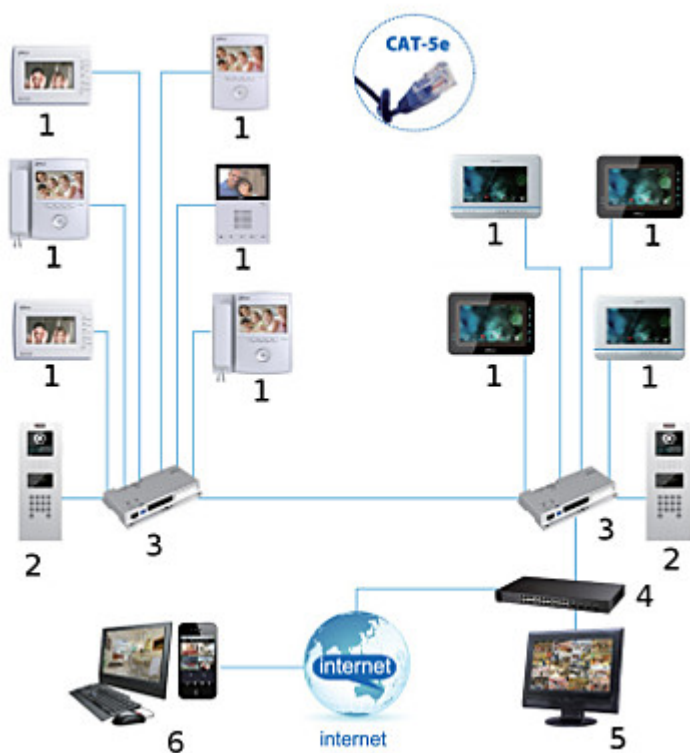

- 1. INDOOR PANEL
  - 2. VIDEO DOORPHONE
  - 3. DHI-VTNS1060A
  - 4. Switch
  - 5. System management center
  - 6. Remote client
- In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|