

Code: VT06221E-P

VIDEO DOORPHONE **VT06221E-P** DAHUA

Net: **502.77 GBP** Gross: **502.77 GBP**

The IP video doorphone can be mounted in a surface-mounted or flush-mounted housing, available separately. The device can be used both in 1-storey and multi-family installations.

Device supports the WIEGAND protocol.



SPECIFICATION

Compatibility:	DAHUA
Sensor:	1/2.9 ", 2 Mpx CMOS
Lens:	2 mm
View angle:	138 °
Display:	2.3 " OLED
proximity reader built-in:	13.56 MHz S50
Image compression method:	H.264
LED illuminator:	✓
IR illuminator:	—
RS-485:	✓
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) Android: Free application DMSS iOS (iPhone): Free application DMSS
Main features:	• The device can be used both in 1-storey and multi-family installations, • Keyboard built-in, • LED indication, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - removing from mounting surface, • Wiegand interface
Operation temp:	-40 °C ... 60 °C

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Power supply:	• PoE (802.3af), • 12 V DC / 500 mA
Power consumption:	≤ 6 W
Housing:	Aluminum
Color:	Silver
"Index of Protection":	IP65 - after additional sealing the housing connection with the mounting surface, e.g. with silicone
IK rating:	IK08
Weight:	0.46 kg
Dimensions:	200 x 98 x 34.7 mm
Supported languages:	Polish, English, Bulgarian, Czech, Finnish, Slovenian, Slovak, Hungarian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION


Front view:




Rear view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

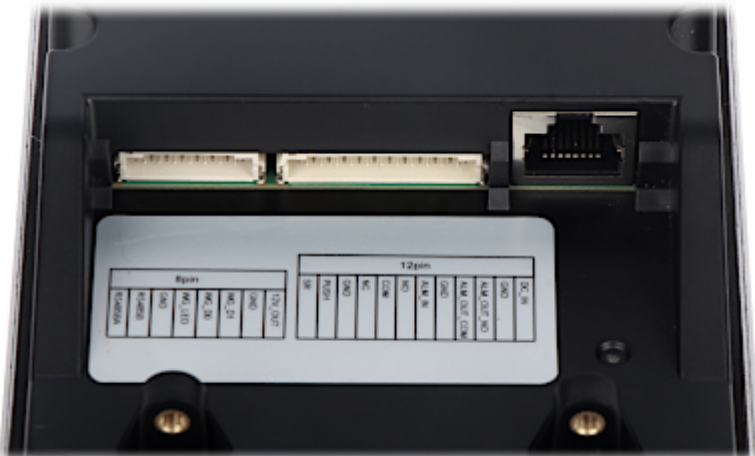

Connectors description:

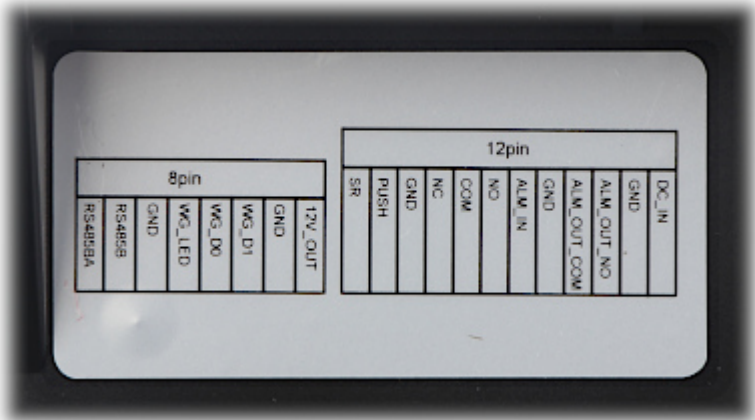

Typical connection diagram:

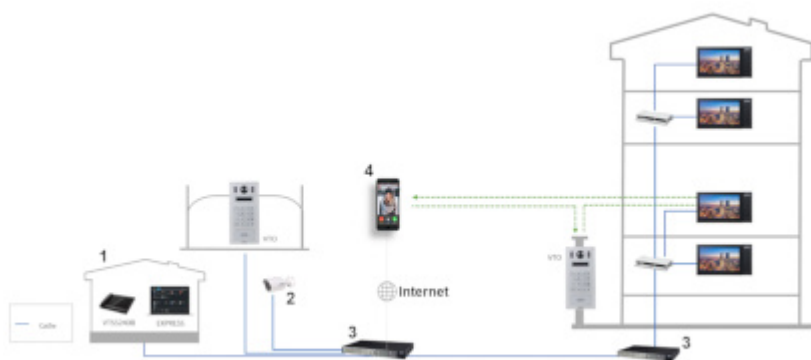

1. System management center
2. IP Camera
3. Switch
4. Remote client

In the kit:



OUR OPINIONS



- Operation with a mobile application only with the cooperation of the VTH monitor with the appropriate software.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------