

Code: VTO2101E-P-S1

VIDEO DOORPHONE **VTO2101E-P-S1** DAHUA

Net: **316.70 EUR** Gross: **316.70 EUR**



The device cooperates with video doorphones, and other panels working in DAHUA IP / SIP standard.

The doorphone requires a SIP server, but it can be a SIP server for itself. After setting up the SIP server, the P2P option is available in the www panel. The use of a special firmware version in the VTH monitors is required.

ATTENTION! The device does not support the Dahua analogue system.

SPECIFICATION

Compatibility:	DAHUA
Sensor:	1/2.7 ", 2.1 Mpx CMOS
Lens:	2.8 mm
View angle:	77 °
Image compression method:	H.264
LED illuminator:	—
IR illuminator:	✓
Main features:	• It can only work with the mobile application, without the VTH monitor • The function of the monitor with the ability to open the door can be a smartphone, tablet or the VTH1 / VTH2 / VTH5 indoor panel • Doorbell button, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Tamper detection - removing from mounting surface • RS-485 interface • Alarm inputs - 1 pcs
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Power supply:	• PoE (802.3af), • 12 V DC / 580 mA
Power consumption:	≤ 7 W (operation) ≤ 2.5 W (Standby mode)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Supported languages:	English
Housing:	Metal, Waterproof - IK10
Color:	Graphite
"Index of Protection":	IP65 - after additional sealing the housing connection with the mounting surface, e.g. with silicone
Operation temp:	-30 °C ... 60 °C
Weight:	0.67 kg
Dimensions:	73 x 163 x 54.5 mm
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front panel:



Side view:



Rear view:



Particular elements:






Connectors:






Device test:
:
Dimensions:

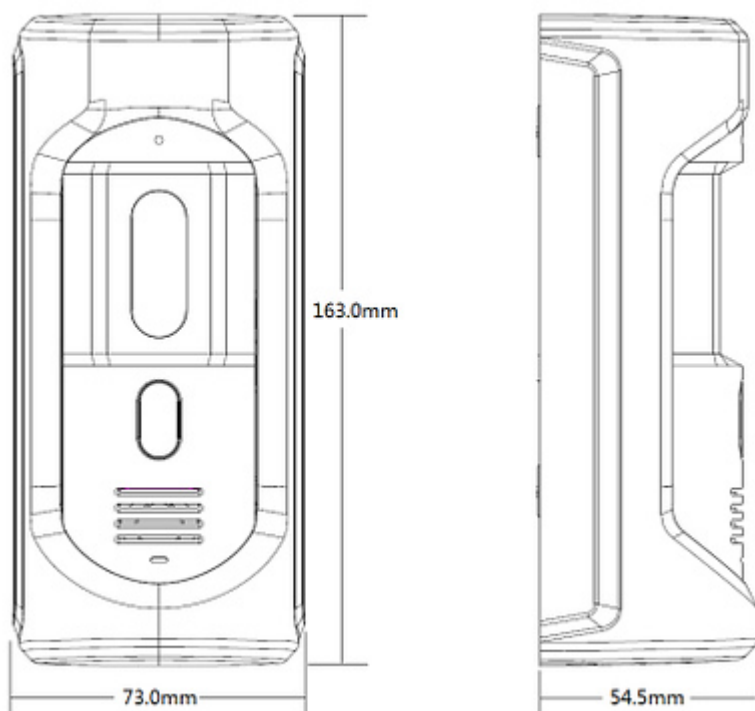

In the kit:

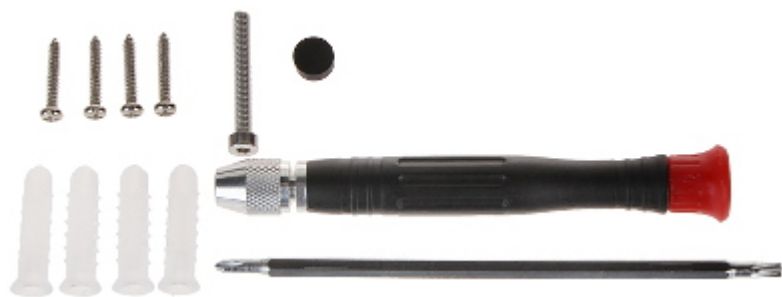

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

