

Code: VTO3311Q-WP

WIRELESS VIDEO DOORPHONE **VTO3311Q-WP** Wi-Fi / IP DAHUA

Net: **315.03 EUR** Gross: **315.03 EUR**

The device works with video doorphones, and other DAHUA panels. The Wi-Fi / IP Video Doorphone allows to remote control of the electromagnetic lock using smartphone or tablet. The function of the monitor with the ability to open the door can be a smartphone, tablet or the VTH indoor panel.

Attention! To play back recordings from the memory card installed in the VTO3311Q-WP, the VTH monitor is required.

Video Doorphone is mounted in a surface housing.



SPECIFICATION

Compatibility:	DAHUA
The number of subscribers served:	4
Sensor:	1/2.8 ", 2 Mpx CMOS
View angle:	125 °
Image compression method:	H.265 / H.264
Resolution:	• Main stream : 1280 x 720, 800 x 480, 720 x 576, 352 x 288 • Sub stream : 1920 x 1080, 800 x 480, 720 x 576, 352 x 288, 320 x 240
LED illuminator:	—
IR illuminator:	✓
PIR detector:	—
proximity reader built-in:	Access control cards - 13.56 MHz S50
Wireless transmission range:	The range limited only by the availability of the Wi-Fi network
Wi-Fi standard:	IEEE 802.11b / IEEE 802.11g / IEEE 802.11n
Network interface:	• Ethernet 10 / 100 Mbps • Wi-Fi
RS-485 interface:	✓

Main features:	• Micro SD memory cards up to 256GB support (possible local recording), • Unlocking by card, application or indoor monitor, • Monitoring the status of individual doors, • WDR - 120 dB - Wide Dynamic Range, • 2D-DNR, 3D-DNR - Digital Noise Reduction, • Day/Night mode (color/b&w/auto), • ICR - Movable InfraRed filter, • Bidirectional communication, • Microphone built-in, • Speakers built-in, • Noise suppression and echo cancellation, • Tamper detection - removing from mounting surface, • Vandal-proof front panel, • LED diodes, • Alarm inputs / outputs : 1 / 1, • Output for the additional lock release button, • Rain cover included
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Power supply:	• PoE (802.3af), • 12 V DC / 1 A
Power consumption:	≤ 6 W (operation) ≤ 3 W (Standby mode)
Housing:	Aluminum alloy, Waterproof
Color:	Graphite
"Index of Protection":	IP65
Mechanical strength:	IK08
Operation temp:	-40 °C ... 60 °C
Weight:	0.6 kg
Dimensions:	• 188 x 107 x 30 mm (without cover) • 191 x 112 x 44 mm (with cover)
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Side view:




Rear view:




Connectors:



Dimensions:

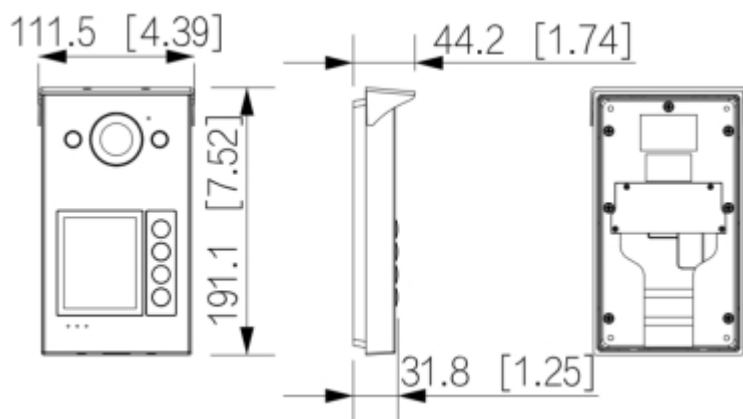

Example of application:

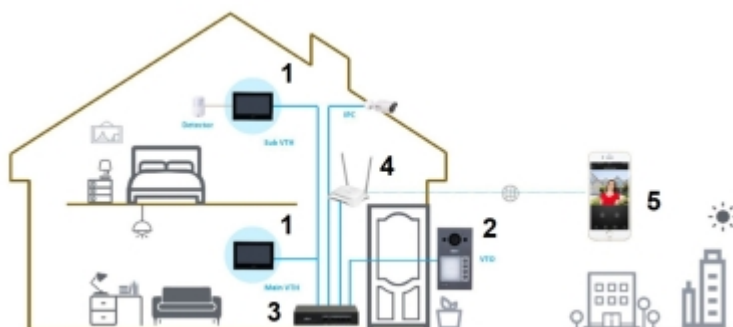

1. INDOOR PANEL
 2. VIDEO DOORPHONE
 3. Switch PoE
 4. Router
 5. Remote client
- In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------