

Code: STC-45

# UNIVERSAL METER **STC-45** DVB-T/T2 DVB-S/S2 DVB-C Spacetronek

Net: **326.30 AUD** Gross: **326.30 AUD**

The STC-45 allows to measure the TV signals at DVB-T/T2, DVB-S/S2, DVB-C installations. Readable menu will help the operation for any installer.



## SPECIFICATION

|                                   |                                                                                                                                 |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Output and input:                 | 1 pcs F plug, 1 pcs IEC socket, 1 pcs mini USB, 1 pcs 2.1/5.5 mm socket, 1 pcs 1.35/3.5 mm socket                               |
| Display:                          | 4.3 " TFT LCD                                                                                                                   |
| Frequency range:                  | <ul style="list-style-type: none"><li>• DVB-T / DVB-T2,</li><li>• DVB-C,</li><li>• DVB-S / DVB-S2</li></ul>                     |
| LNB power supply:                 | 13 / 18 V                                                                                                                       |
| Switching between bandwidths:     | 0 / 22 kHz                                                                                                                      |
| DiSEqC:                           | DiSEqC 1.0, 1.1, 1.2, USALS systems support                                                                                     |
| Antenna powering:                 | 0 V / 5 V / 12 V / 24 V                                                                                                         |
| Video signal test:                | ✓                                                                                                                               |
| Programming and firmware upgrade: | via micro USB port                                                                                                              |
| Battery power supply:             | <ul style="list-style-type: none"><li>• Li-Ion battery 7.4 V / 5000 mAh</li><li>• 12 V / 2 A (power adapter included)</li></ul> |

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Main features:        | <ul style="list-style-type: none"> <li>• Measurement of signal strength and quality</li> <li>• Signal indicator : LED display / Beep signal</li> <li>• Measurement of BER, MER</li> <li>• Spectrum measurement mode</li> <li>• LNB overvoltage protection</li> <li>• LNB indicator and short-circuit protection</li> <li>• Support for a satellite dish motor</li> <li>• UNICABLE technology support</li> <li>• Signal lock audible notification</li> <li>• Clear graphical interface</li> <li>• OSD menu full in Polish</li> <li>• Ability to test signals from CCTV cameras in AHD / HD-CVI / HD-TVI standards with resolutions up to 8 Mpx</li> <li>• Long standby time</li> <li>• Low power consumption</li> <li>• Compass</li> <li>• Flashlight built-in</li> <li>• Illuminated buttons</li> <li>• Anti-shock silicone case</li> </ul> |
| Weight:               | 0.66 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Dimensions:           | 207 x 137 x 52 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Supported languages:  | Polish, English, Spanish, Portuguese, Russian, French                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Manufacturer / Brand: | Spacetronik                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Guarantee:            | 2 years                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## PRESENTATION

Front panel:



Side view:



Top view:



Rear view:









Place for battery:



OSD menu:



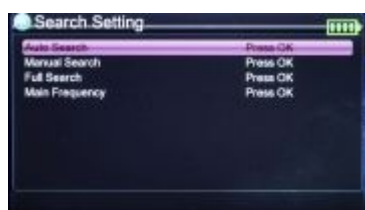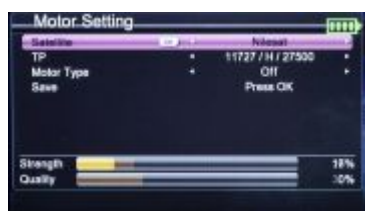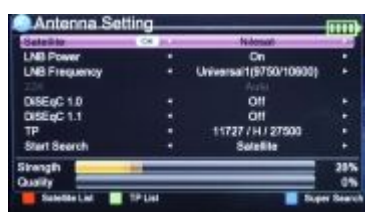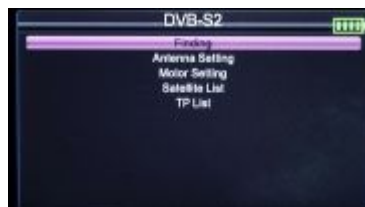

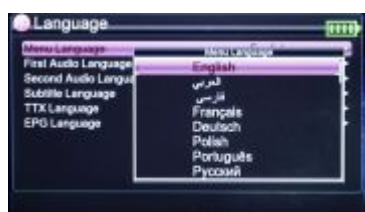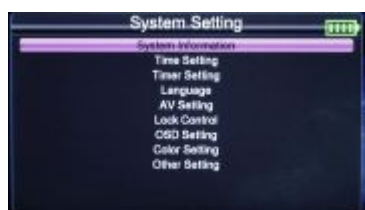

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|