

Code: FAAC-XP20BD

PHOTOCELL **FAAC-XP20BD** TXRX SET

Net: **52.87 EUR** Gross: **52.87 EUR**

Photocells are designed for cooperation with gate automation systems. The photocells have the ability to adjust the angle horizontally. The set includes transmitter and receiver.

An infra-red beam is sent to the receiver from the transmitter. If an object appears in the field of the created barrier (eg a car or a man), the photocell will react by sending a signal to change the state at the control unit input.

The devices are resistant to moisture penetration, equipped with a housing that protects against unwanted exposure to sunlight.



SPECIFICATION

Beam width:	$\pm 7^\circ @ 20 \text{ m}$, $\pm 13.5^\circ @ 5 \text{ m}$
Operation range:	20 m
Response time:	20 ms
Power supply:	24 V DC - Control panel BUS (2easy)
Current consumption:	• 10 mA Transmitter • 10 mA Receiver
Main features:	• Cooperation with the FAAC gate automation system • Angle adjustment range $\pm 90^\circ$ horizontal • Possibility to install up to 16 pairs of photocells on the same automation system • Protection from interference produced by external light sources (such as vehicle LED headlights) • Green Tech Technology • Surface/column mounting • Immunity to environmental changes
Housing:	Plastic
"Index of Protection":	IP54
Color:	Black
Operation temp:	-20 °C ... 55 °C
Weight:	0.07 kg Transmitter / Receiver
Dimensions:	130 x 42 x 41 mm Transmitter / Receiver
Manufacturer / Brand:	FAAC

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:

2 years


PRESENTATION

Front view:



Internal view of the housing:



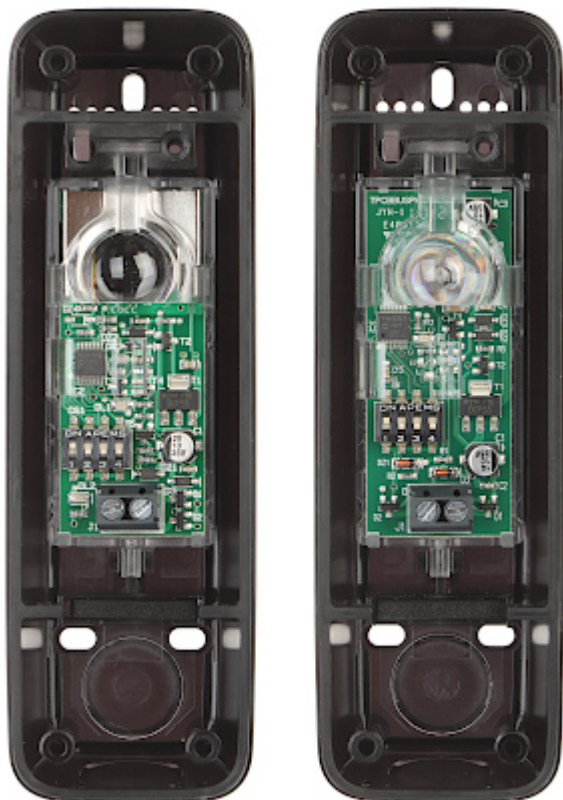

Mounting side view:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

