

Code: DS-1H34-0102P

## EXTENDER **DS-1H34-0102P** Hikvision

Net: **41.37 EUR** Gross: **41.37 EUR**

The DS-1H34-0102P allows to increase the distance of PoE power sending and data transmission via UTP Cat.5e up to 200 m (EXTEND mode disabled) or up to 400 m (EXTEND mode enabled). The device does not require external power supply.

WARNING! With the EXTEND mode enabled, the maximum camera power should not exceed 5 W.



### SPECIFICATION

|                                      |                                                                                                                                                                                                                        |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards:                           | PoE : IEEE 802.3at, IEEE 802.3af                                                                                                                                                                                       |
| Input voltage:                       | 42 ... 57 V DC                                                                                                                                                                                                         |
| Output voltage:                      | 42 ... 57 V DC                                                                                                                                                                                                         |
| Number of inputs:                    | 1                                                                                                                                                                                                                      |
| Number of outputs:                   | 2                                                                                                                                                                                                                      |
| Connector:                           | 3 x RJ-45 socket                                                                                                                                                                                                       |
| LED indicators:                      | Link/Act                                                                                                                                                                                                               |
| Supported data rates:                | Range : <ul style="list-style-type: none"><li>• 100 m - Input + 2 x 100 m - Output @ 10 / 100 Mbps, The EXTEND mode disabled</li><li>• 200 m - Input + 2 x 200 m - Output @ 10 Mbps, The EXTEND mode enabled</li></ul> |
| Output power:                        | according to IEEE 802.3af - The power should be reduced by 2 W, which the device consumes                                                                                                                              |
| Protections:                         | <ul style="list-style-type: none"><li>• Overvoltage protection</li><li>• Short-circuit protection</li></ul>                                                                                                            |
| Housing:                             | Metal                                                                                                                                                                                                                  |
| Operation temp. / Relative humidity: | -30 ... 70 °C / 10 ... 90 %                                                                                                                                                                                            |
| Weight:                              | 0.20 kg                                                                                                                                                                                                                |
| Dimensions:                          | 94 x 72 x 26 mm                                                                                                                                                                                                        |
| Manufacturer / Brand:                | Hikvision                                                                                                                                                                                                              |
| SAP Code:                            | 301800920                                                                                                                                                                                                              |
| Guarantee:                           | <b>3 years</b>                                                                                                                                                                                                         |

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Top view:




Connectors:





Transmission schematic diagram:

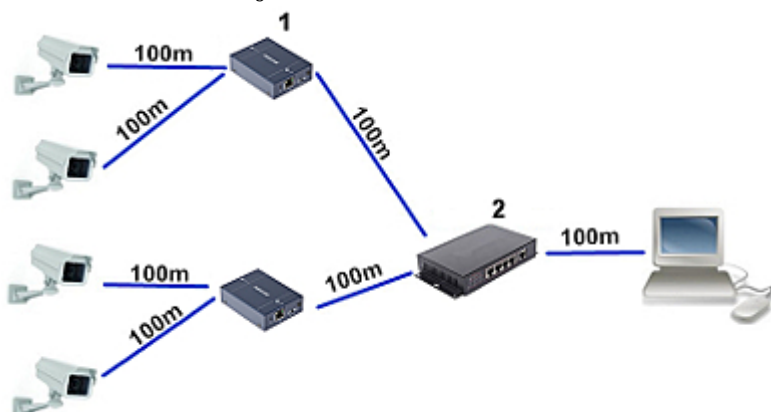

1. DS-1H34-0102P

2. Switch PoE

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

