

Code: C1-2812W

CAMERA C1-2812W 700 TVL 2.8 ... 12 mm

Net: 51.31 GBP Gross: 51.31 GBP

Outdoor camera equipped with high resolution Sharp sensor. The built-in vari-focal lens allows to set very wide range of camera view angles.

Very high resolution of the camera sensor ensures more detailed image than standard CCTV camera. The high resolution sensor guarantees high detailed image, so this camera is perfect solution for surveillance systems requiring persons or vehicles recognition, for example at places like: buildings entrance, lobbies, gates, lounges, etc. OSD menu allows to set many useful functions and parameters.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).

OSD menu controller is placed on the cable. It allows to easily set or change the parameters and functions of the camera without move or unmount it.



SPECIFICATION

Sensor:	1/3 " Sharp CCD
Resolution:	700 TVL
Lens:	2.8 ... 12 mm
View angle:	81 ° ... 22 ° (manufacturer data) 79 ° ... 28 ° (our tests result)
Range of IR illumination:	60 m
S/N ratio:	52 dB
Video output:	1 Vpp / 75 Ω
Main features:	<ul style="list-style-type: none">• WDR - Wide Dynamic Range• DNR - Digital Noise Reduction• HLC - High Light Compensation (spot)• BLC - configurable Back Light Compensation• Configurable Privacy Zones• Motion Detection• Sharpness - sharper image outlines• Mirror - Mirror image• Day/Night mode (color/b&w/auto)
OSD menu:	✓
Power supply:	12 V / 650 mA
Housing:	Metal
Color:	White
"Index of Protection":	IP66
Operation temp:	-10 °C ... 50 °C
Weight:	0.92 kg
Dimensions:	270 x 107 x 102 mm
Guarantee:	2 years

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


PRESENTATION



Side view:



Bracket dimensions:

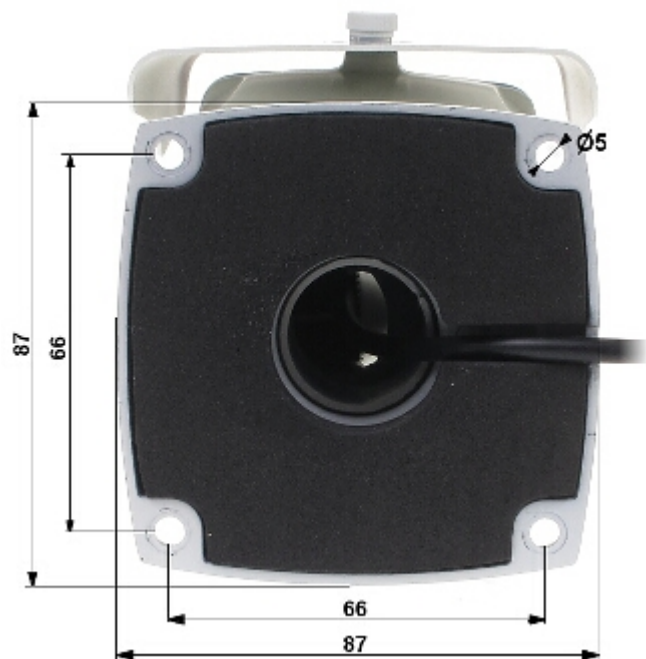

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

- Camera cables are hidden inside the bracket - aesthetic protection against cutting.
- The camera bracket has a regulation in all three planes.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

