

Code: C656-2812W

## PAL CAMERA **C656-2812W** 650 TVL 2.8 ... 12 mm

Net: **37.67 EUR** Gross: **37.67 EUR**

The C656-2812W camera is equipped with very high resolution Sony sensor. The built-in vari-focal lens allows to set very wide range of camera view angles.

Very high resolution of the camera sensor ensures more detailed image than standard CCTV camera. The high resolution sensor guarantees high detailed image, so this camera is perfect solution for surveillance systems requiring persons or vehicles recognition, for example at places like: buildings entrance, lobbies, gates, lounges, etc. OSD menu allows to set many useful functions and parameters.

OSD menu controller is placed on the cable. It allows to easily set or change the parameters and functions of the camera without move or unmount it.

The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).



### SPECIFICATION

Standard:	PAL
Sensor:	1/3 " Sony Super HAD II CCD
Resolution:	650 TVL
Lens:	2.8 ... 12 mm
View angle:	81 ° ... 23 °
Range of IR illumination:	60 m
S/N ratio:	> 52 dB
Video output:	1 Vpp / 75 Ω
Power supply:	12 V / 650 mA
Main features:	<ul style="list-style-type: none"><li>• WDR - Wide Dynamic Range</li><li>• DNR - Digital Noise Reduction</li><li>• BLC - configurable Back Light Compensation</li><li>• HLC - High Light Compensation (spot)</li><li>• DIS - Digital Image Stabilization</li><li>• EZOOM - Digital Zoom off</li><li>• Motion Detection</li><li>• Configurable Privacy Zones</li><li>• Auto Gain Control</li><li>• Mirror - Mirror image</li><li>• Day/Night mode (color/b&amp;w/auto)</li><li>• Sharpness - sharper image outlines</li></ul>
OSD menu:	✓
Housing:	Compact, Metal
Color:	White
"Index of Protection":	IP66
Operation temp:	-20 °C ... 50 °C
Weight:	0.920 kg
Dimensions:	300 x 95 x 90 mm
Supported languages:	English
Guarantee:	2 years

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

## PRESENTATION

Front view:



Bottom view:




Mounting side view:



In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

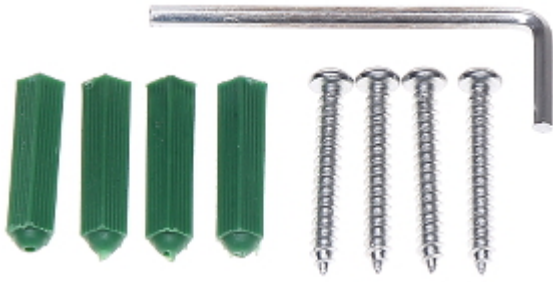

## OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

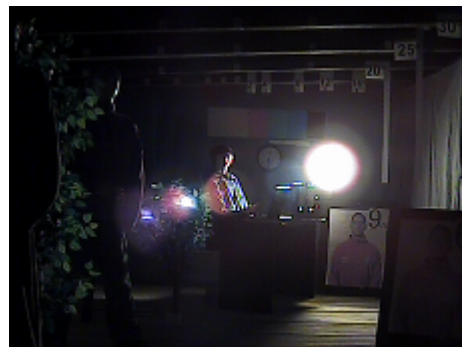

## OUR OPINIONS



- The camera bracket has a regulation in all three planes.

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

