

Code: IPC-HF8331FP

IP CAMERA **IPC-HF8331FP** - 3.0 Mpx DAHUA

Net: **440.39 EUR** Gross: **440.39 EUR**

IP camera with efficient H.264/H.265/MJPEG image compression algorithm for clear and smooth video streaming at maximal resolution of 2048 x 1536 (3.0 MPx). PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " STARVIS™ CMOS
Matrix size:	3.0 Mpx
Resolution:	2048 x 1536 - 3.0 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Video output:	1 Vpp / 75 Ω
Lens:	—
Auto Iris socket:	DC
Min. illumination:	• 0.002 Lux (color) / F1.2 • 0.0001 Lux (B/W) / F1.2
S/N ratio:	> 50 dB
Image compression method:	H.265 / H.264
Alarm inputs / outputs:	2 / 2
RS-485 interface:	✓
Protocols:	Pelco-D, Pelco-P and others
Bitrate:	24 kbps ... 10240 kbps - H.264 14 kbps ... 9216 kbps - H.265
Main stream frame rate:	50 fps - 3.0 Mpx
Network interface:	10/100 Base-T (RJ-45)

Network protocols:	HTTP, HTTPS, TCP, ARP, RTSP, RTP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/IPv6, QoS, UPnP, NTP, Bonjour, IEEE 802.1x, Multicast, ICMP, IGMP, SNMP
Audio:	• Microphone built-in • 2 x Audio input • 1 x Audio output • Bi-directional audio streaming support • Audio detection
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	16.12
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	• WDR - 140 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • EIS - Electronic Image Stabilization • F-DNR (Defog) - Reduction of image noise caused by precipitation • ABF - (Auto Back Focus) - auto focus correction during day/night operation modes switching • ROI - improve the quality of selected parts of image • ICR - Movable InfraRed filter • AGC - Automatic Gain Control • BLC/HLC - Back Light / High Light Compensation • D-ZOOM - Digital Zoom • Day/Night mode (color/b&w/auto) • Motion Detection • IVS analysis : crossing the line (tripwire), intrusion, abandoned/missing object, face detection, people counting, heat map • Audio detection • Configurable Privacy Zones • Mirror - Mirror image • Sharpness - sharper image outlines
Power supply:	• PoE (802.3af), • 12 V DC / 550 mA, • 24 V AC / 270 mA
Power consumption:	< 6.6 W
Housing:	BOX, Metal
Color:	White / Black
Operation temp:	-30 °C ... 60 °C
Weight:	0.76 kg
Dimensions:	162 x 86 x 74 mm
Manufacturer / Brand:	DAHUA
Supported languages:	Polish, English, Bulgarian, Czech, Danish, Finnish, Greek, Norwegian, Swedish, Hungarian



Guarantee:

3 years

PRESENTATION

Side view:




Bottom view:



Rear view:



Dimensions:

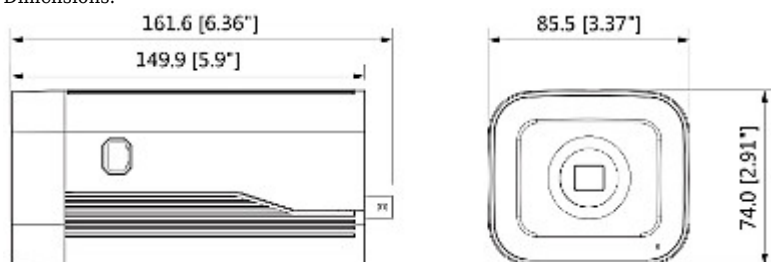

In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at direct strong light opposite to camera:



Camera image at night conditions with external IR illuminator on:



Camera image at night conditions, at different illumination values show below:

10 LUX:



1 LUX:



0.1 LUX:



0.01 LUX:



PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

