


Code: SUG-7-DIN/RS-485

OVERVOLTAGE PROTECTION **SUG-7-DIN/RS-485** RS-485 SYMMETRIC LINE EWIMAR

Net: **33.61 EUR** Gross: **33.61 EUR**

Protection device, protects the devices against lightning discharges or surges in AC 230V power lines. SUG-7-DIN/RS-485 is designed to mount on the DIN 35 mm rail.

The condition of correct protection is connecting the SUG-7-DIN/RS-485 device to the proper grounding or PE wire.

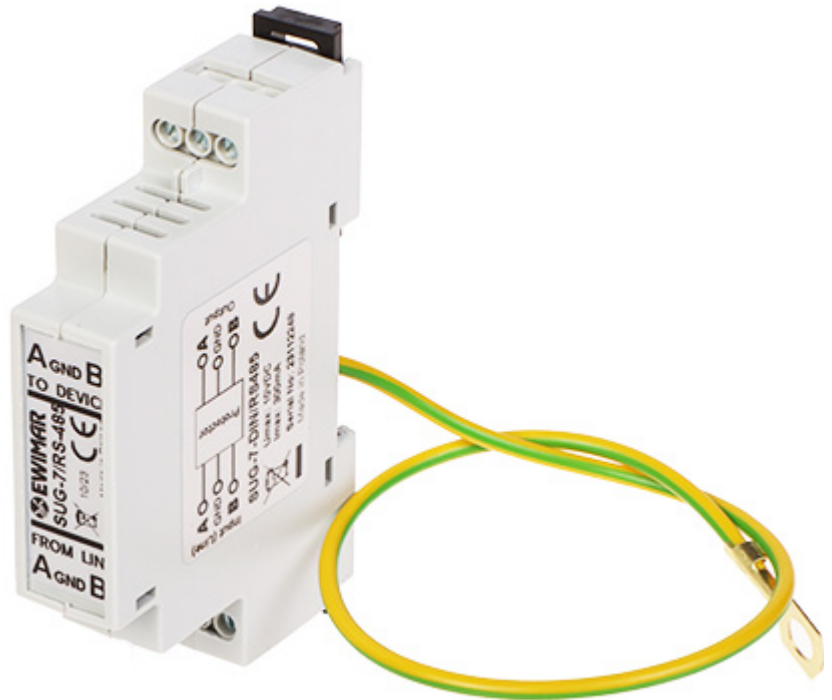

SPECIFICATION

Nominal voltage (line-line):	10 V DC
Maximal voltage (line-line):	14 V DC
Maximal voltage line-PG:	90 V DC
Voltage protection level shield-PG:	350 V DC
Voltage protection level line-line:	250 A
Voltage protection level line-PG:	10 kA
Lightning current line-PG:	3.5 kA
Nominal series current:	300 mA
Maximal series current:	300.5 mA
Operation state indication:	—
Connectors type:	2 x terminals RS-485
Housing:	Plastic, DIN, TS-35 rail mounting
Weight:	0.050 kg
Dimensions:	95 x 58 x 18 mm
Manufacturer / Brand:	EWIMAR
Guarantee:	2 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Front view:



Side view:



Mounting side view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

