


Code: UTP/K5/305M/MTC

TWISTED-PAIR CABLE **UTP/K5/305M/MTC** METACON

Net: **0.29 EUR** Gross: **0.29 EUR**

The UTP/K5/305M/MTC twisted-pair cable is designed to professional applications of installation. For convenience, cable is marking with length counter printed with 1 m distance step.

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.

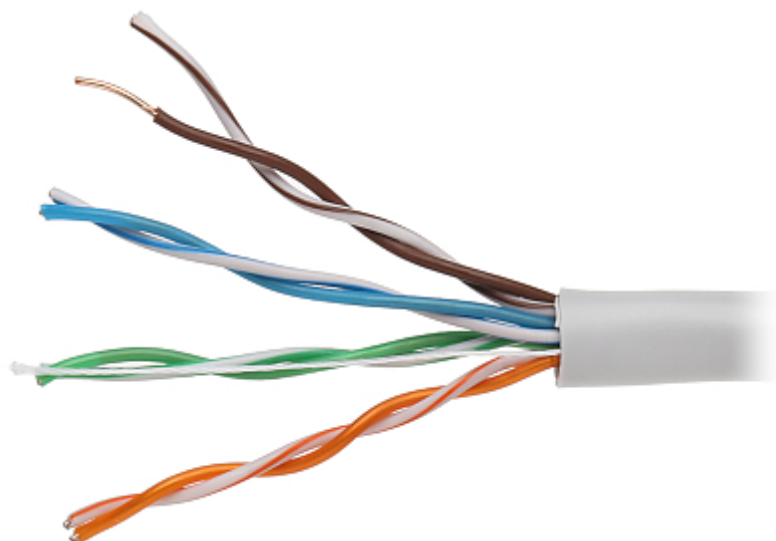


SPECIFICATION

In section:	305 m . Price for 1m when buying a whole roll
Type:	UTP cat. 5e
Inner conductor:	Ø 0.48 mm Cu=99.99%, Wire - AWG 24
Resistance:	10.03 Ω / 100 m
Shield:	—
Outer coating:	Ø 5.0 mm PVC
Coating color:	light gray
Main features:	Parameters far exceeding the requirements for Category 5+
Operation temp:	-20 °C ... 70 °C
Weight:	28 kg/km
Manufacturer / Brand:	METACON
Guarantee:	10 years

PRESENTATION

LABORATORY TESTS RESULTS:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

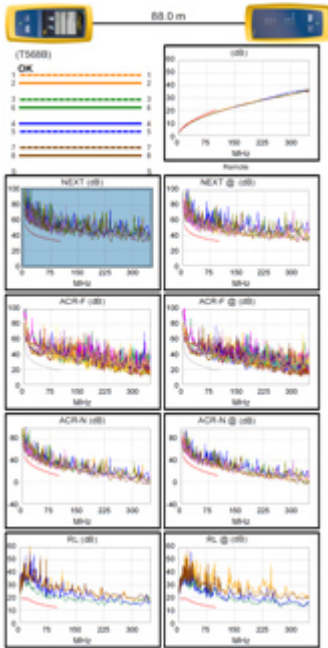

The tests were performed using tool DSX-5000
 Package:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------