

Code: DS-7104NI-Q1/M

NVR **DS-7104NI-Q1/M** 4 CHANNELS Hikvision

Net: **48 571.43 HUF** Gross: **48 571.43 HUF**

The DS-7104NI-Q1/M digital recorder is a professional device using in IP surveillance systems.



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	max. 4 Mpx - 2688 x 1520 px
Video outputs:	1 pcs HDMI 1 pcs VGA
Audio support:	4 Channels - Audio from cameras
Audio inputs:	—
Audio outputs:	—
Image compression method:	H.265+ / H.265 / H.264+ / H.264
Bitrate:	max. 40 Mbps
Supported hard drives:	1 x 6 TB SATA
Recording modes:	Manual, Motion Detection, Schedule
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow Records playback from max. 4 channels in the same time @ 1080p 1 or 4 channels synchronous playback, Smart Search function
Network interface:	1 x RJ-45 10/100 Base-TX
Network functions:	Live image view, Playback the records, Backup the records - iVMS-4200 application The device has the ability to work with the Hik-Connect application for mobile devices Web-Server built-in max. 16 on-line users
Network protocols:	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, UPnP
ONVIF:	✓
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) • Android: Free application Hik-Connect • iOS: Free application Hik-Connect
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile client access ports:	8000
RTSP URL:	<ul style="list-style-type: none"> • rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no01/ - Main stream • rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no02/ - Sub stream
USB:	2 pcs USB 2.0
Alarm inputs / outputs:	—
PTZ control:	IP Speed Dome Cameras
Motion Detection:	✓
Intelligent image analysis:	✓
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	12 V DC / 1.5 A (power adapter included)
Power consumption:	max. 10 W (without HDD)
Operation temp:	-10 °C ... 55 °C
Weight:	0.78 kg
Dimensions:	260 x 225 x 48 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	303613773
Guarantee:	3 years

PRESENTATION

Top view:



Rear panel:




See how to mount a hard disk drive and configure the recorder:

:

In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

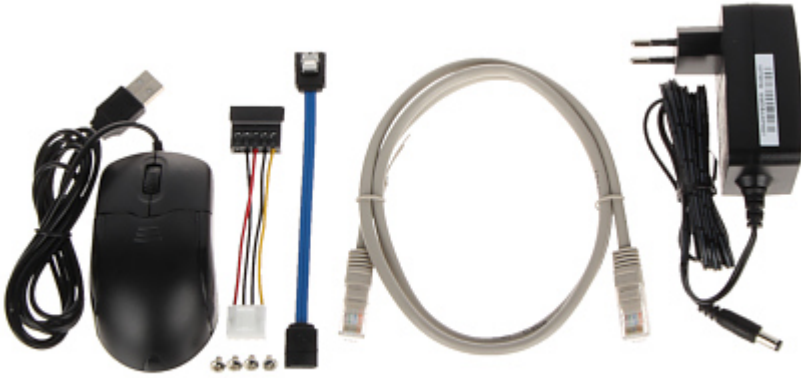

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

