

Code: NVR4432-4KS2/I

NVR **NVR4432-4KS2/I** 32 CHANNELS DAHUA

Net: **828.93 EUR** Gross: **828.93 EUR**



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	max. 16 Mpx - 4000 x 4000 px
Video outputs:	1 pcs HDMI 4K 1 pcs VGA
Audio support:	32 Channels - Audio from cameras
Audio inputs:	1 pcs CINCH
Audio outputs:	1 pcs CINCH
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Supported hard drives:	4 x 10 TB SATA
Recording modes:	Manual, Sensor, Motion detection, Schedule
Network protocols:	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, SNMP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Center, IP Search, P2P, ONVIF
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow
Bitrate:	max. 256 Mbps
Network functions:	Full support via network, Remote records copying, Web-Server built-in
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS See how to configure the P2P function in Dahua recorders and how to enable the mobile application
Default IP address:	192.168.1.108
Default admin user / password:	admin / -
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Alarm inputs / outputs:	16 / 4
PTZ control:	RS-485 - Pelco-P, Pelco-D and others IP Speed Dome Cameras
Motion Detection:	✓
RS-485 interface:	PTZ control function
RS-232 interface:	✓
USB:	1 pcs USB 2.0 1 pcs USB 3.0
Intelligent image analysis:	✓
Main features:	<ul style="list-style-type: none"> • Advanced peripheral protection functions: intrusion, crossing line with separate rules for vehicles and pedestrians, • Support for devices with the ANPR vehicle identification functions and face recognition, • Heat map - the selection in the image by corresponding colors the areas with different traffic • people counting • SMD PLUS - searching for an object classified as: human, motor vehicle, • face detection • Support for up to 10 face databases, including 20 000 face images • supports 6 types of facial attributes extraction • Face recognition and analysis in real time (up to 12 photos per second) : <ul style="list-style-type: none"> - Comparison of faces with images from the database - Face analysis: determination of sex, age and characteristic elements of appearance (glasses, facial hair, mask) • Intelligent face search by metadata of different targets or uploading pictures of faces to the device and comparing them with recorded faces by similarity
Mouse support:	✓
IR remote controller in the set:	—
Power supply:	100 ... 240 V AC, 50 / 60 Hz
Power consumption:	≤ 8 W (without HDD)
Operation temp:	-10 °C ... 55 °C
Weight:	4.32 kg
Dimensions:	440 x 411 x 76 mm
Supported languages:	Polish, English
Country of origin:	China
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front panel:





Rear panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Example captures of device interface:

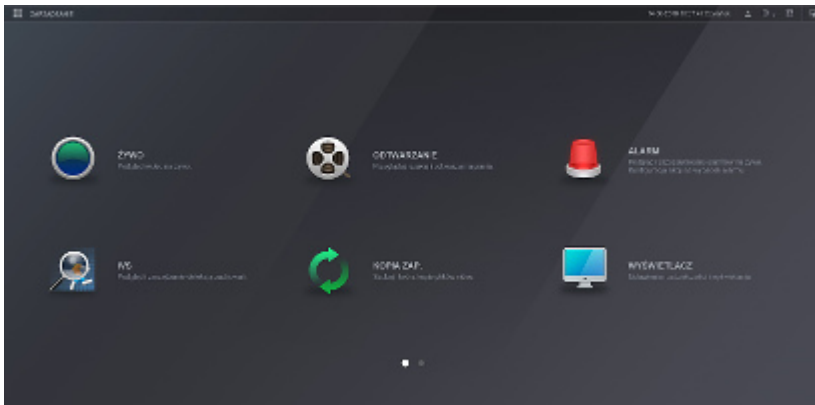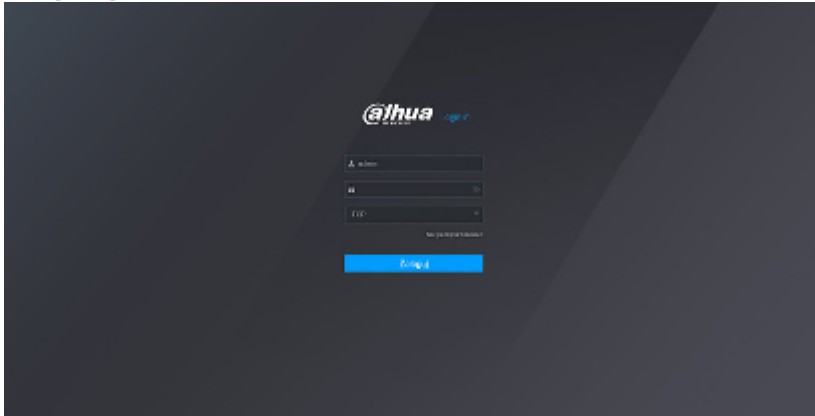

In the kit:



OUR OPINIONS



- Audio transmission via network.
- The NVR4432-4KS2/I is equipped with USB 3.0 port allowing to fast records backup.
- LAN Gigabit interface.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60