

Code: DSC-HSM2204

# THE POWER SUPPLY MODULE AND 4 PROGRAMMABLE OUTPUTS **DSC-HSM2204**

Net: **63.74 EUR** Gross: **63.74 EUR**

1 A power supply module and 4 high-current programmable outputs.

This device is dedicated for DSC alarm control panels.




## SPECIFICATION

|                                                                      |                                                                                                                                                                                                                             |
|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of outputs:                                                   | 4 pcs                                                                                                                                                                                                                       |
| Outputs type:                                                        | 4 pcs - OC output                                                                                                                                                                                                           |
| Tamper input:                                                        | ✓                                                                                                                                                                                                                           |
| Current-carrying capacity, AUX output:                               | 1 A                                                                                                                                                                                                                         |
| Load capacity of OC type programmable outputs:                       | 1 A                                                                                                                                                                                                                         |
| Relay switching current:                                             | —                                                                                                                                                                                                                           |
| Current consumption by active relay:                                 | —                                                                                                                                                                                                                           |
| Current consumption (w/o OC type output load and w/o active relays): | —                                                                                                                                                                                                                           |
| Protection class (Grade):                                            | 2                                                                                                                                                                                                                           |
| Battery backup support:                                              | 12 V / min. 7 Ah                                                                                                                                                                                                            |
| Power supply:                                                        | 16.5 V AC / 40 mA                                                                                                                                                                                                           |
| Main features:                                                       | <ul style="list-style-type: none"><li>• Protection against deep discharge of the battery</li><li>• Supervised output for siren connection</li><li>• Supervision of power failures, battery status and AUX failure</li></ul> |
| Operation temp:                                                      | -10 °C ... 55 °C                                                                                                                                                                                                            |
| Weight:                                                              | 0.09 kg                                                                                                                                                                                                                     |
| Dimensions:                                                          | 145 x 83 mm                                                                                                                                                                                                                 |
| Manufacturer / Brand:                                                | DSC                                                                                                                                                                                                                         |
| Guarantee:                                                           | 2 years                                                                                                                                                                                                                     |

## PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

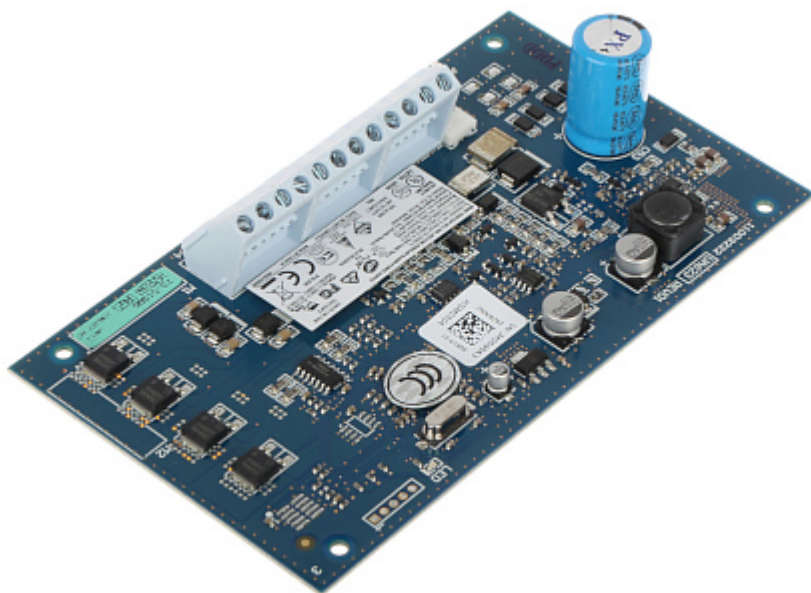


Connectors:



Top view:

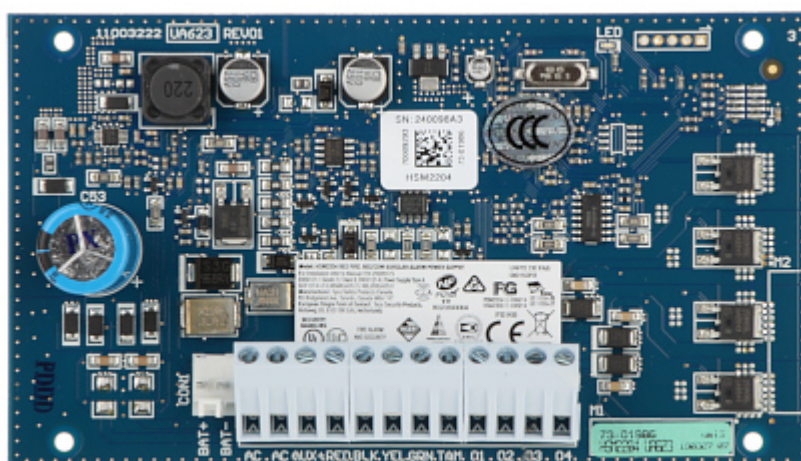

In the kit:

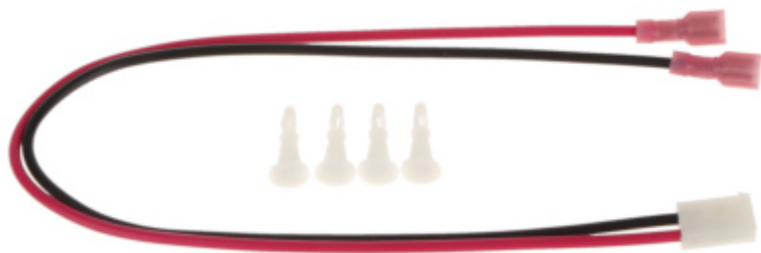

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

