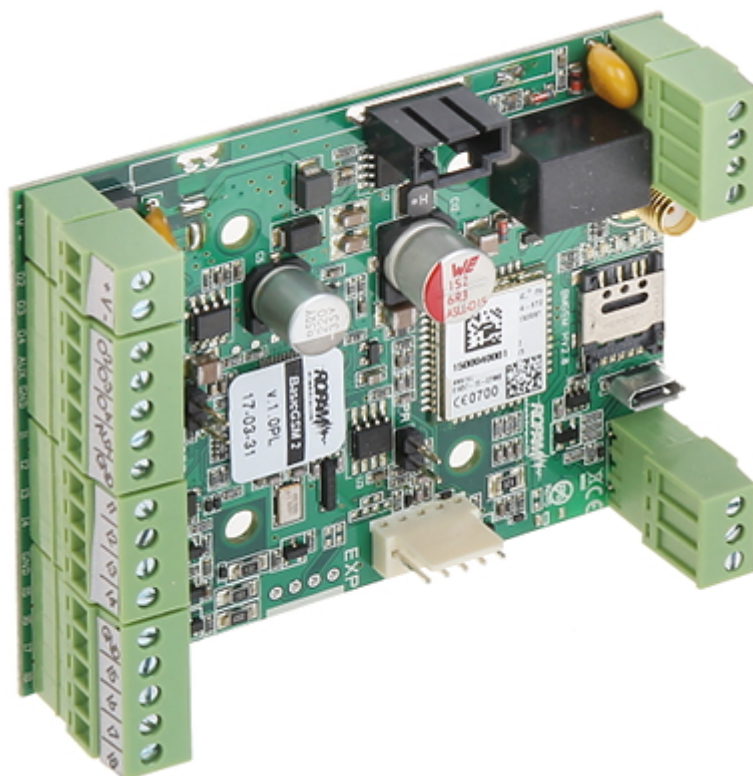


GSM COMMUNICATION MODULE **BASIC-GSM-2** ROPAMNet: **92.84 EUR** Gross: **92.84 EUR**

The device dedicated for integration with alarm control panels, controllers, relays, etc. via binary inputs and outputs. The terminal is equipped with analog inputs for cooperation with e.g. temperature sensor, and with LogicProcessor providing advanced logic functions allowing for the implementation of simple home automation systems. In combination with an embedded GSM module allowing for remote control, notification, the device is suitable for very wide range of applications.


**SPECIFICATION**

|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm inputs:                          | 6 pcs - NO/NC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Binary/analog inputs:                  | 2 pcs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Number of low-current OC type outputs: | 3 pcs : 700 mA / 30 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Telephone numbers to reporting events: | 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Event codes sending messages type:     | SMS / CLIP / VOICE / E-mail / GPRS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Events memory:                         | 1000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Main features:                         | <ul style="list-style-type: none"> <li>• 4 controlled outputs by system events, SMS, CLIP, DTMF, RopamBasic, LogicProcessor</li> <li>• AUX power output : 1 A</li> <li>• SMS: independent messages for events in the system</li> <li>• VOICE/CLIP: independent voice connection providing voice messages (speech synthesizer, listening function) for system events</li> <li>• LogicProcessor: - advanced logic functions, arithmetic functions, counters, timers</li> <li>• GPRS Monitoring: cooperation with RMS server or encrypted Kronos NET TCP/IP communication, two IP addresses, redundant SMS transmission, parallel operation with SMS/VOICE notification mode</li> <li>• FAC power testing input (e.g. of alarm control panel)</li> <li>• Remote update of module software - micro USB</li> </ul> |
| Power supply:                          | 12 V DC - Voltage control < 11 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Operation temp:                        | - 10 ... 55 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Weight:                                | 0.06 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Dimensions:                            | 87 x 68 x 25 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Supported languages:                   | Polish                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

|                       |         |
|-----------------------|---------|
| Manufacturer / Brand: | ROPAM   |
| Guarantee:            | 2 years |


PRESENTATION

Top view:

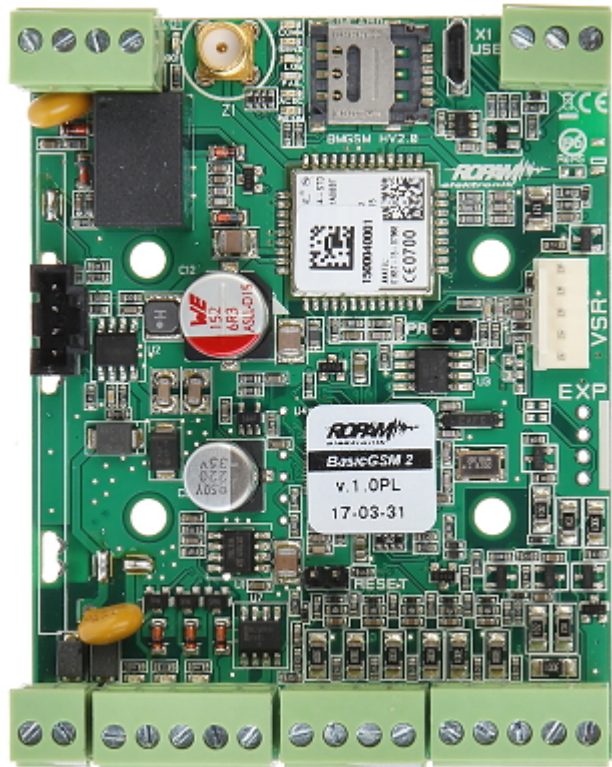

Connectors:



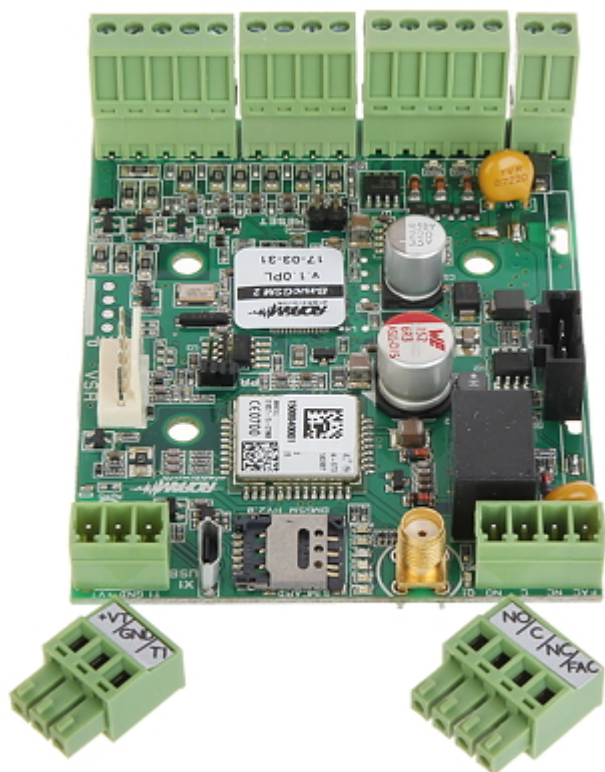

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|