

Code: SV-BLADE-01/RED

## OUTDOOR SIREN **SV-BLADE-01/RED** AMC

Net: **27.17 EUR** Gross: **27.17 EUR**

Outdoor siren with optical and acoustical signaling intended for use in intruder alarm systems. Optical signaling source are LEDs, and acoustical signaling is generating by piezo transducer.

The design of the SV-BLADE-01/RED siren allows it to be used both as a siren powered from the alarm system, as well as in a configuration with its own emergency power supply using an optional battery. High-impact polycarbonate enclosure, featuring a very high mechanical strength and guarantees aesthetic appearance of siren even after many years of using. Construction enables high level of tamper protection (against opening and removing from mounting surface).



### SPECIFICATION

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sound pressure level:        | <ul style="list-style-type: none"><li>• 100 dB @ 1 m,</li><li>• 85 dB @ 3 m</li></ul>                                                                                                                                                                                                                                                                                                                                                                        |
| Main features:               | <ul style="list-style-type: none"><li>• Super bright LEDs</li><li>• Watchdog function - additional, optional optical signaling of standby mode</li><li>• Emergency Power Supply</li><li>• Tamper protection (detection of removing from mounting surface and enclosure opening)</li><li>• Support for many models of alarm control panels</li><li>• Place for battery : 185 x 72 x 34 mm or 99 x 72 x 52 mm</li><li>• "Index of Protection" : IP54</li></ul> |
| Compliance with standards:   | EN 50131-4:2010, Grade 2, Class IV                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Color:                       | White / LED indication - Red                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Internal backup battery:     | 12 V / 2.2 Ah (not included)                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Power supply:                | 13.8 V DC ( 11 ... 15 V DC ) (powering from external adapter)                                                                                                                                                                                                                                                                                                                                                                                                |
| Maximal current consumption: | 150 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Operation temp:              | -25 °C ... 55 °C                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Weight:                      | 0.77 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Dimensions:                  | 295 x 210 x 70 mm                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Manufacturer / Brand:        | AMC                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Guarantee:                   | 2 years                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

### PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Front view:




Mounting side view:



Internal view of the housing:



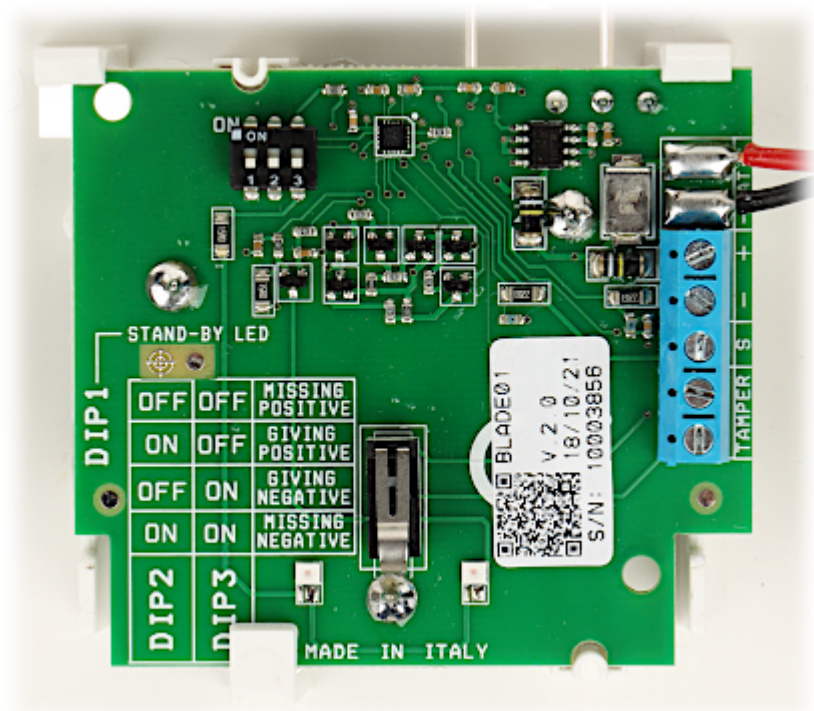

Place for battery:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|